

SpeakerLAB Report

FMJ-60 Daisy

Author: Cinanni

Saved: 11/11/2013 16.36.33

Printed: 25/02/2014 15.51.11



Summary



Daisy nov 2013



| | |
|------------------------|---------------------------|
| Author | Cinanni |
| Re | 5,517 Ohm |
| Zmin | 7,000 Ohm |
| Signal type | Pink Noise |
| Signal application | Continuous |
| Normative | Custom |
| Vrms (time average) | 24,955 V |
| VC material | Aluminium |
| VC initial Temperature | 8,321 degC |
| Initial Date and Time | 11/11/2013 16.36.33 |
| Final Date and Time | 12/11/2013 0.36.34 |
| Test duration | 0 08:00:00 |
| Limits | Limits disabled |
| Results | Final time reach. Test OK |
| HW Version | Lite |





Printed: 25/02/2014 15.51.25

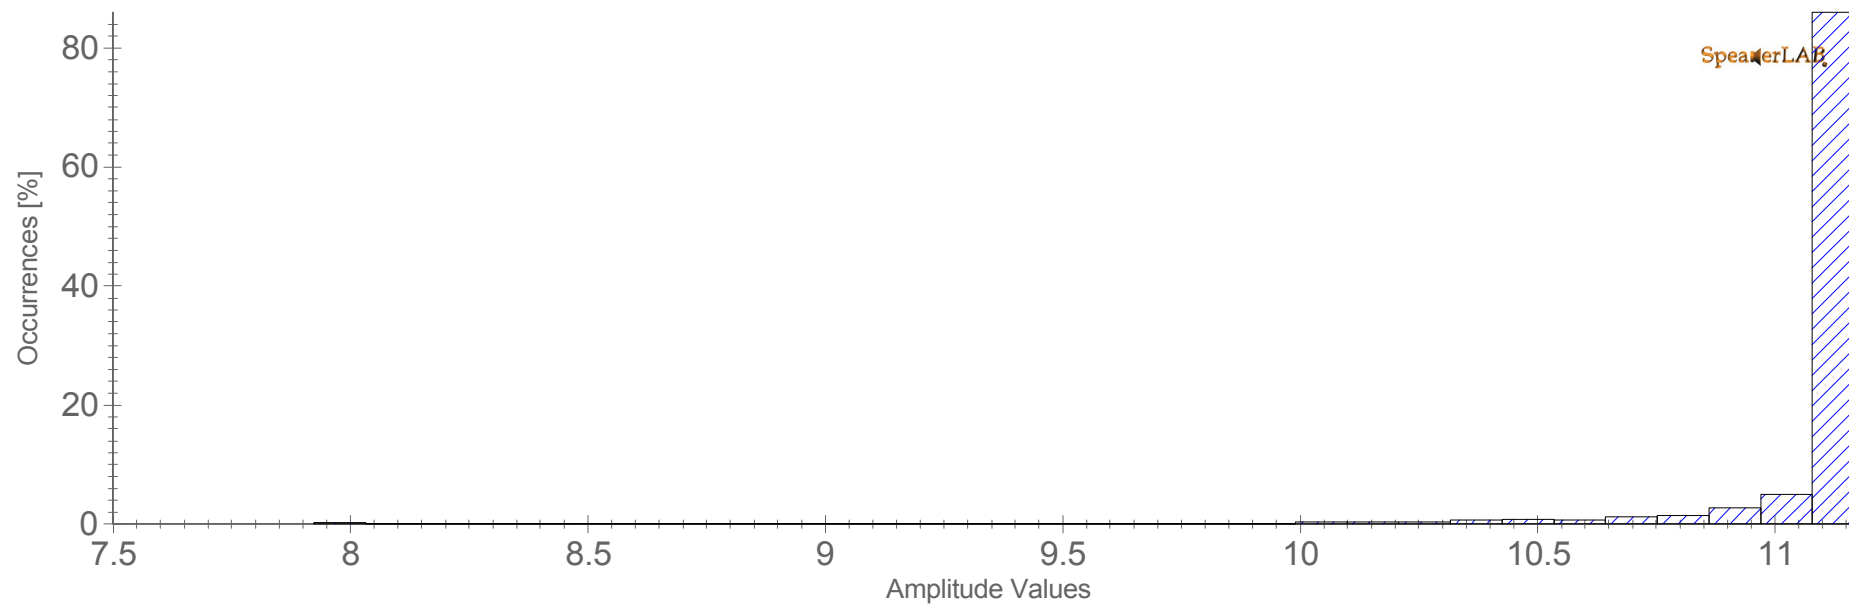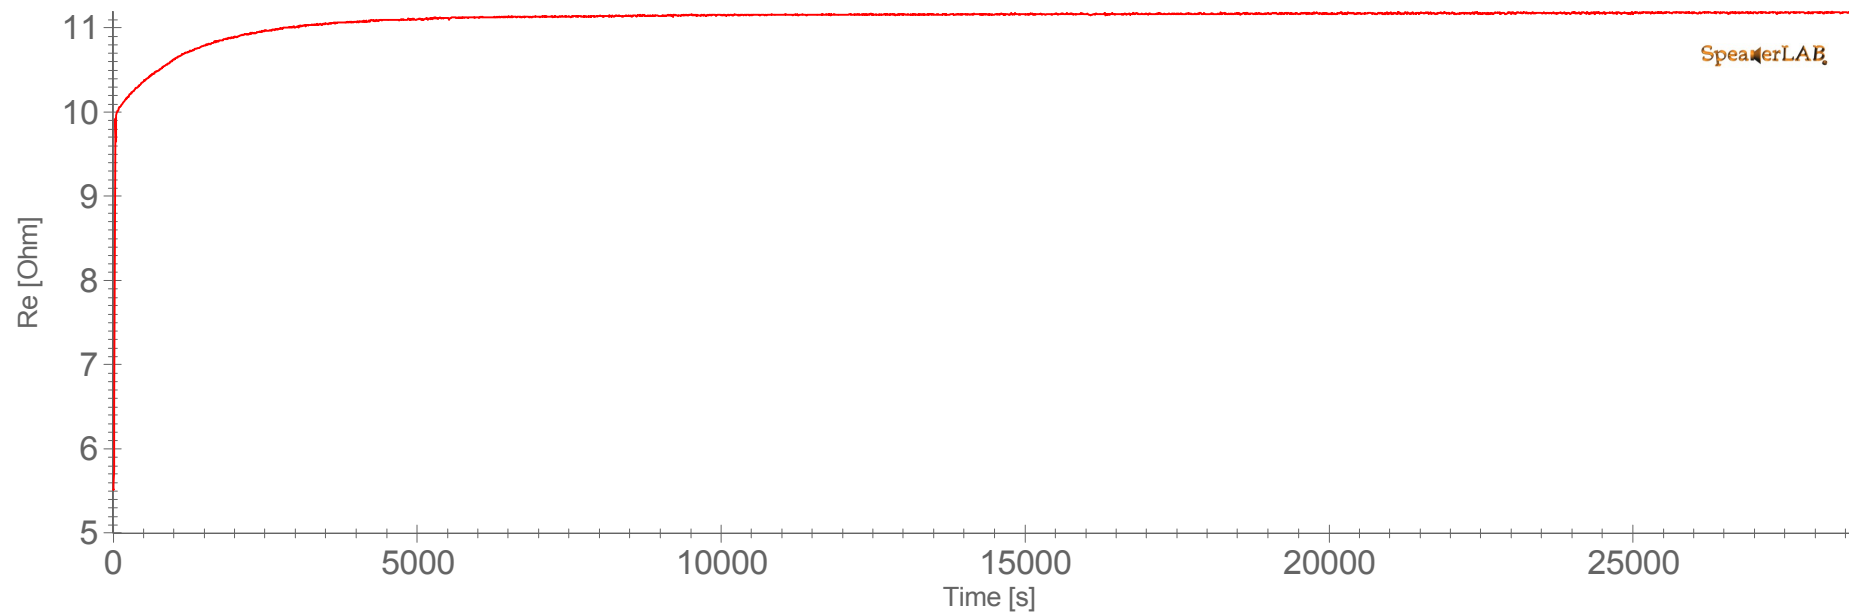

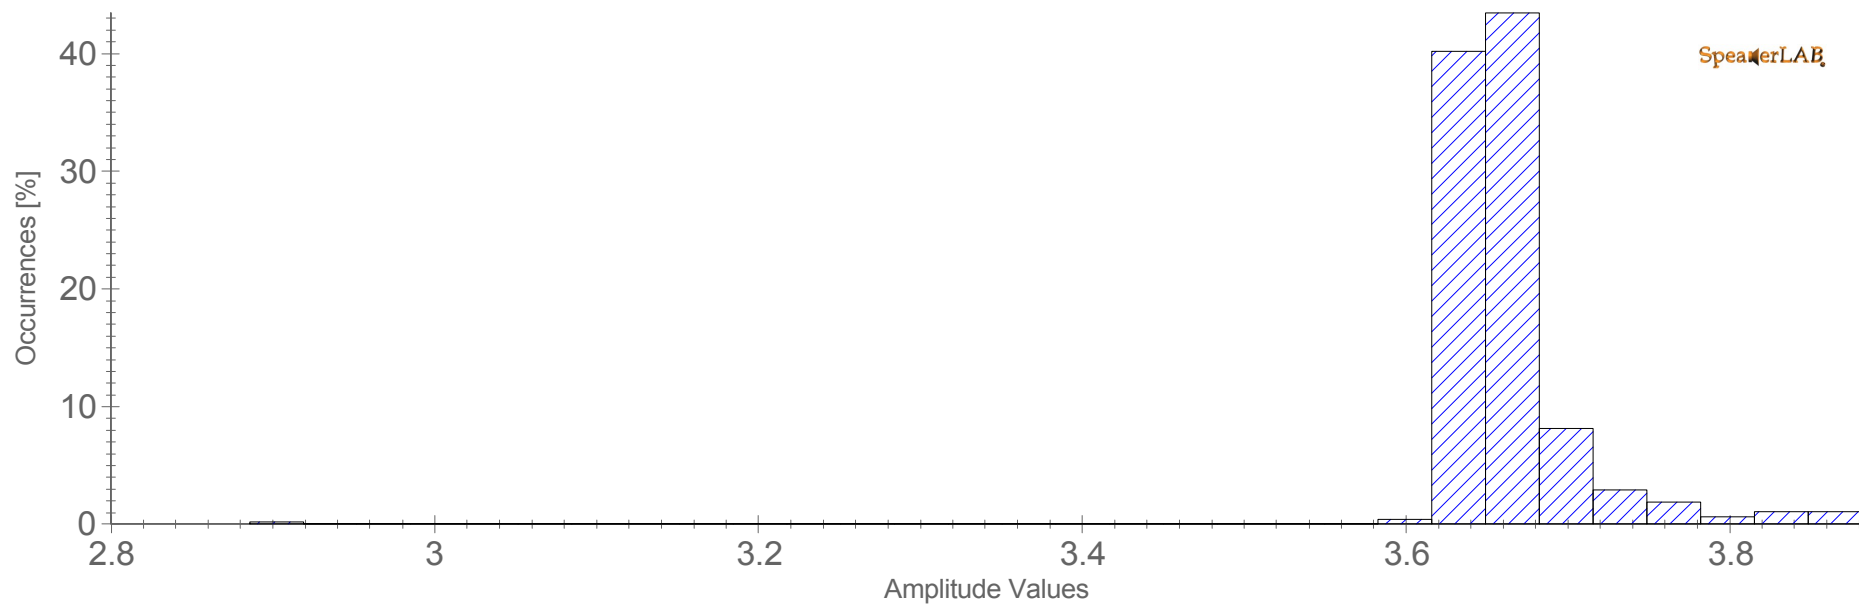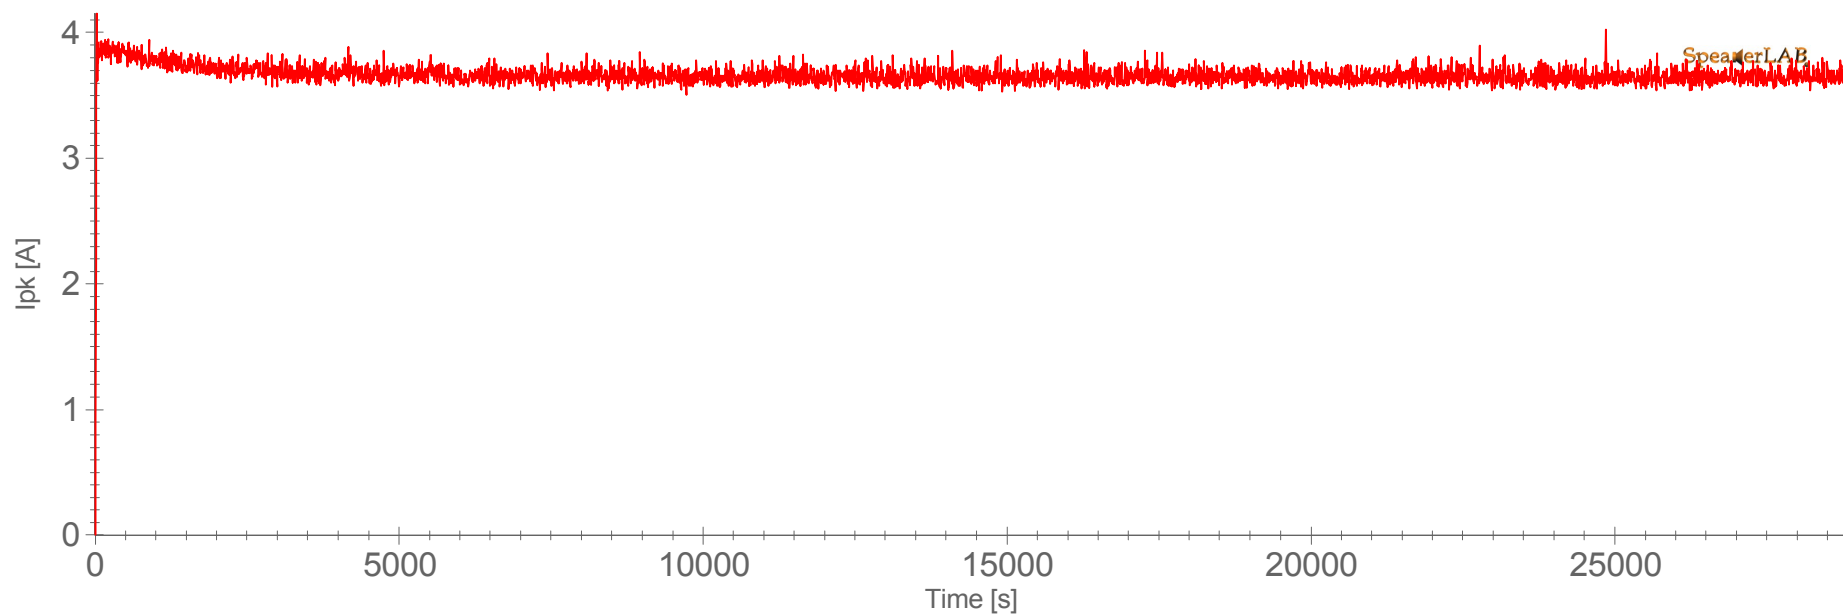

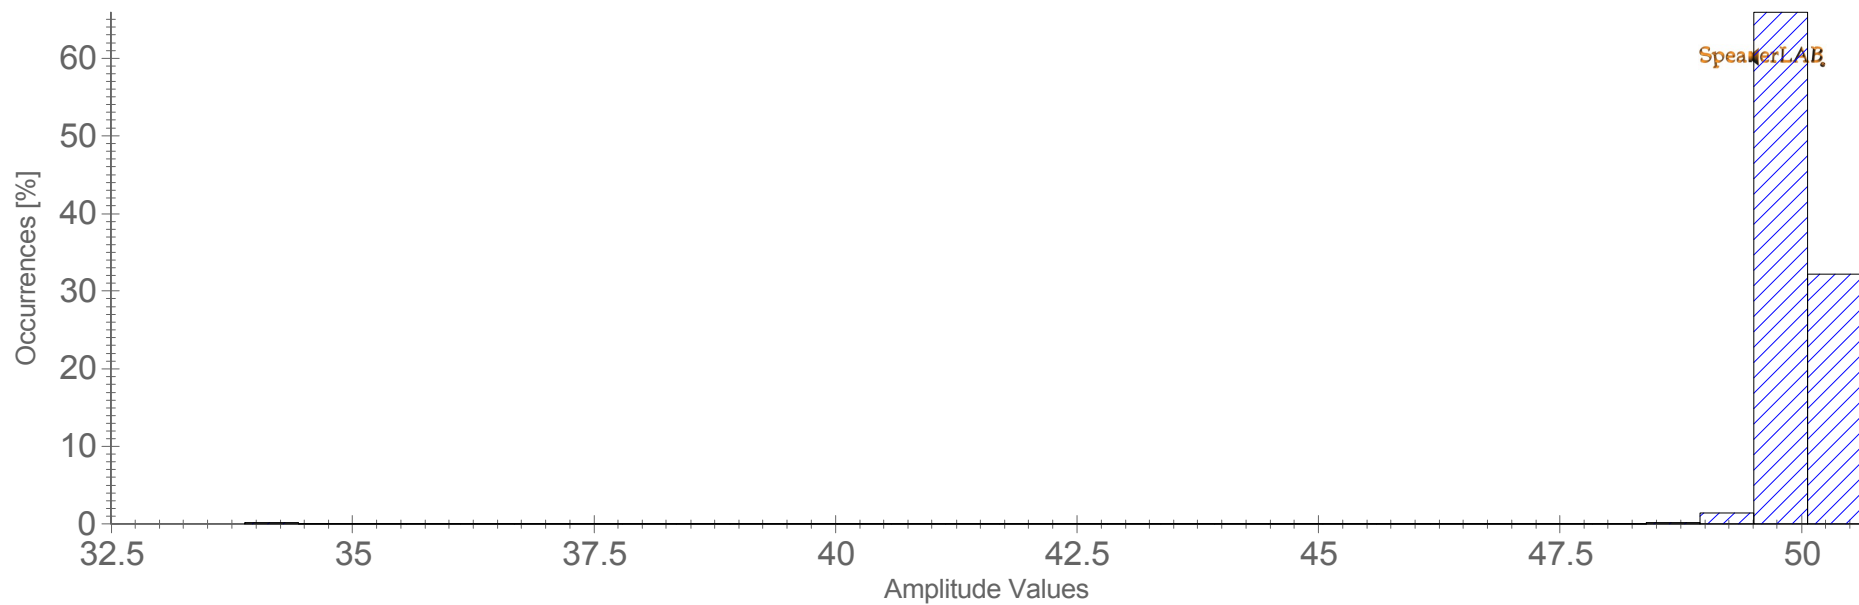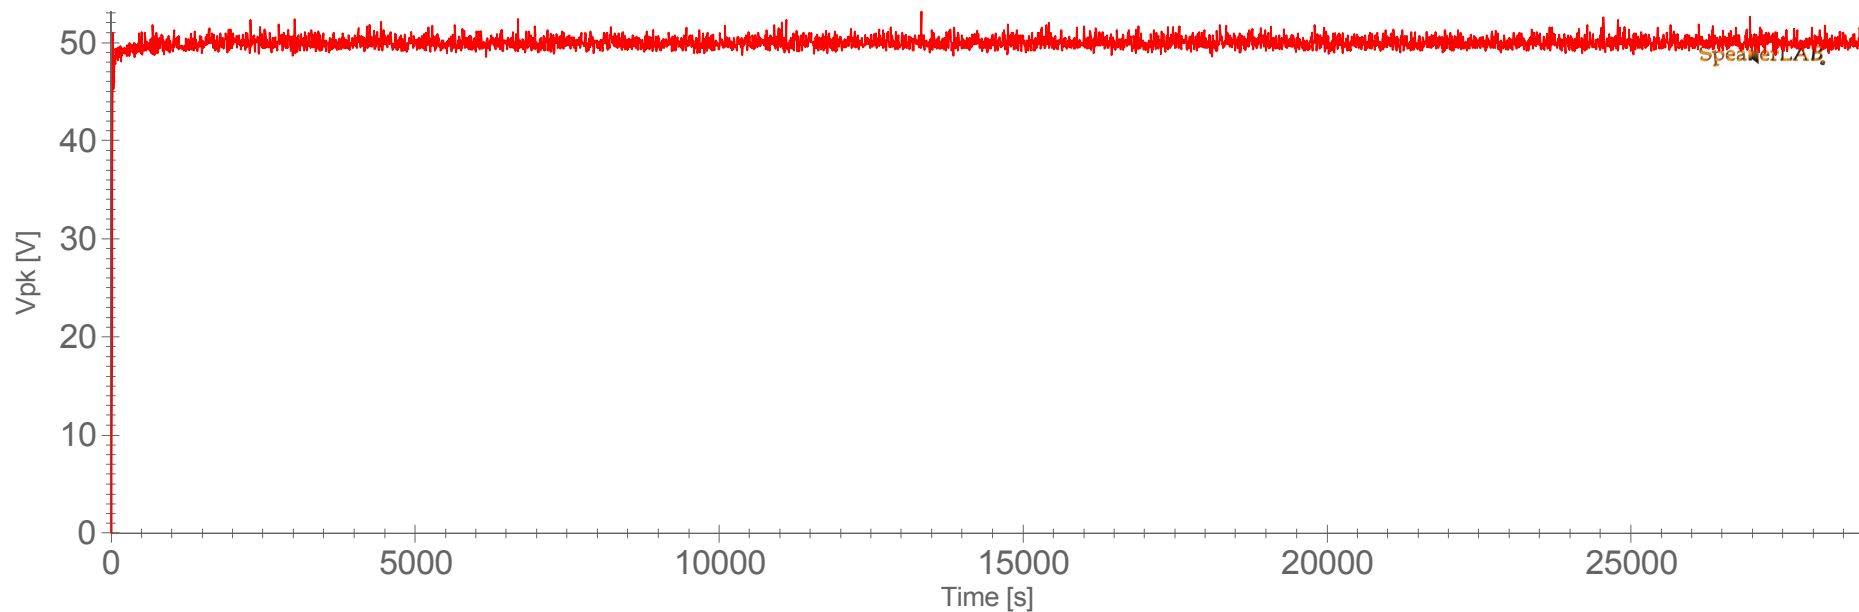

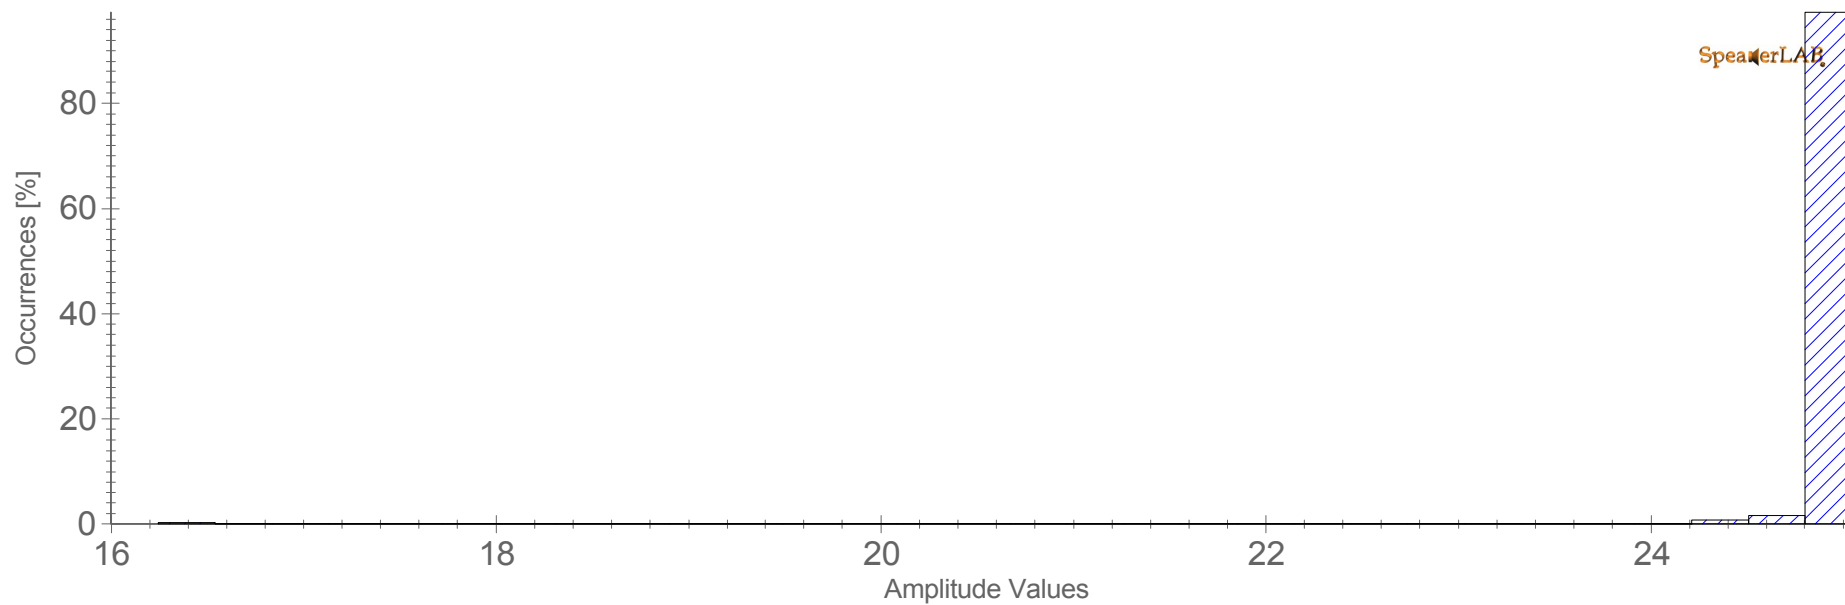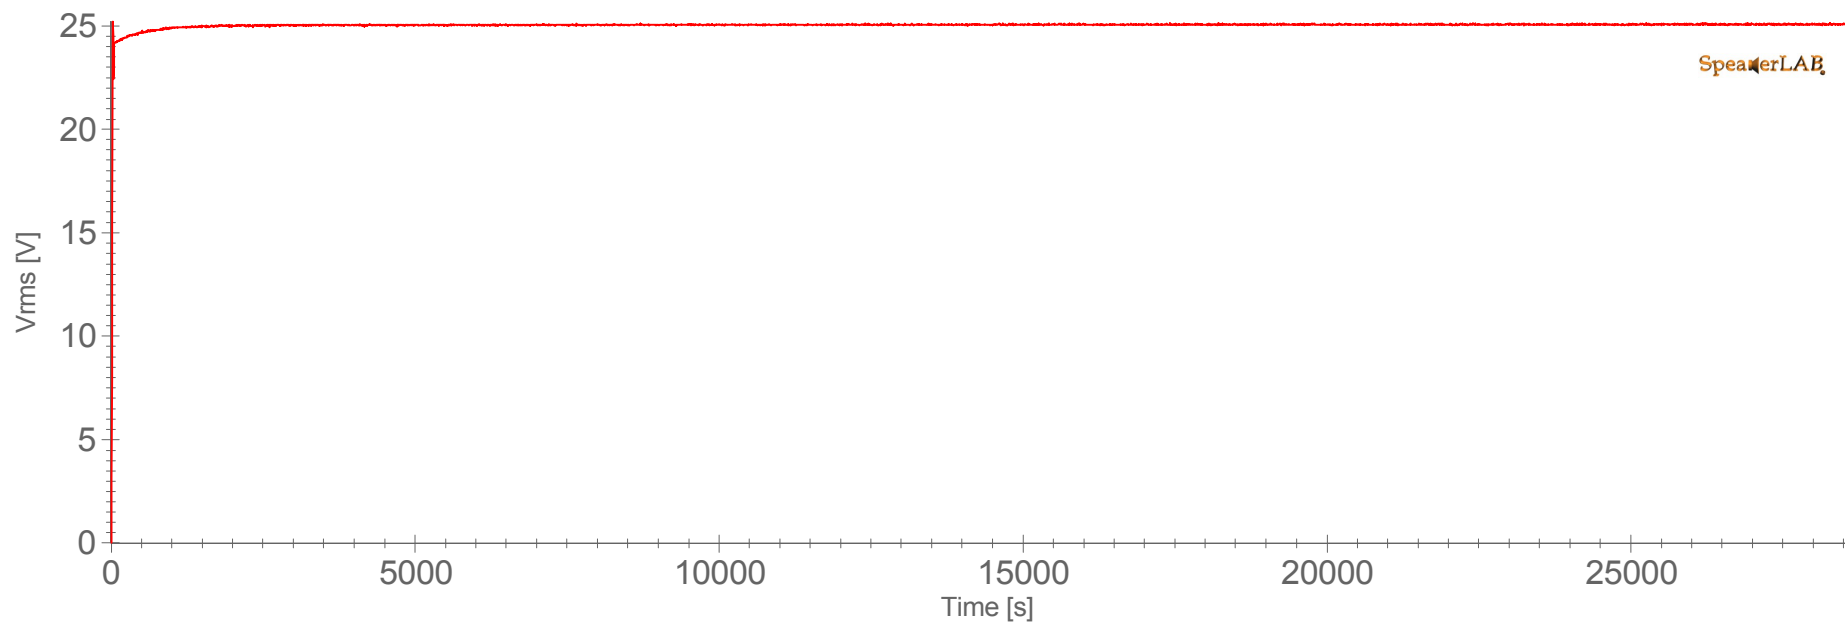

Author: Cinanni

Saved: 11/11/2013 16.36.33

Printed: 25/02/2014 15.52.42

FMJ-60 Daisy



Vrms



Max Peak: 28,53



Mean Value: 24,96



Min Peak: 0,00



CIARE

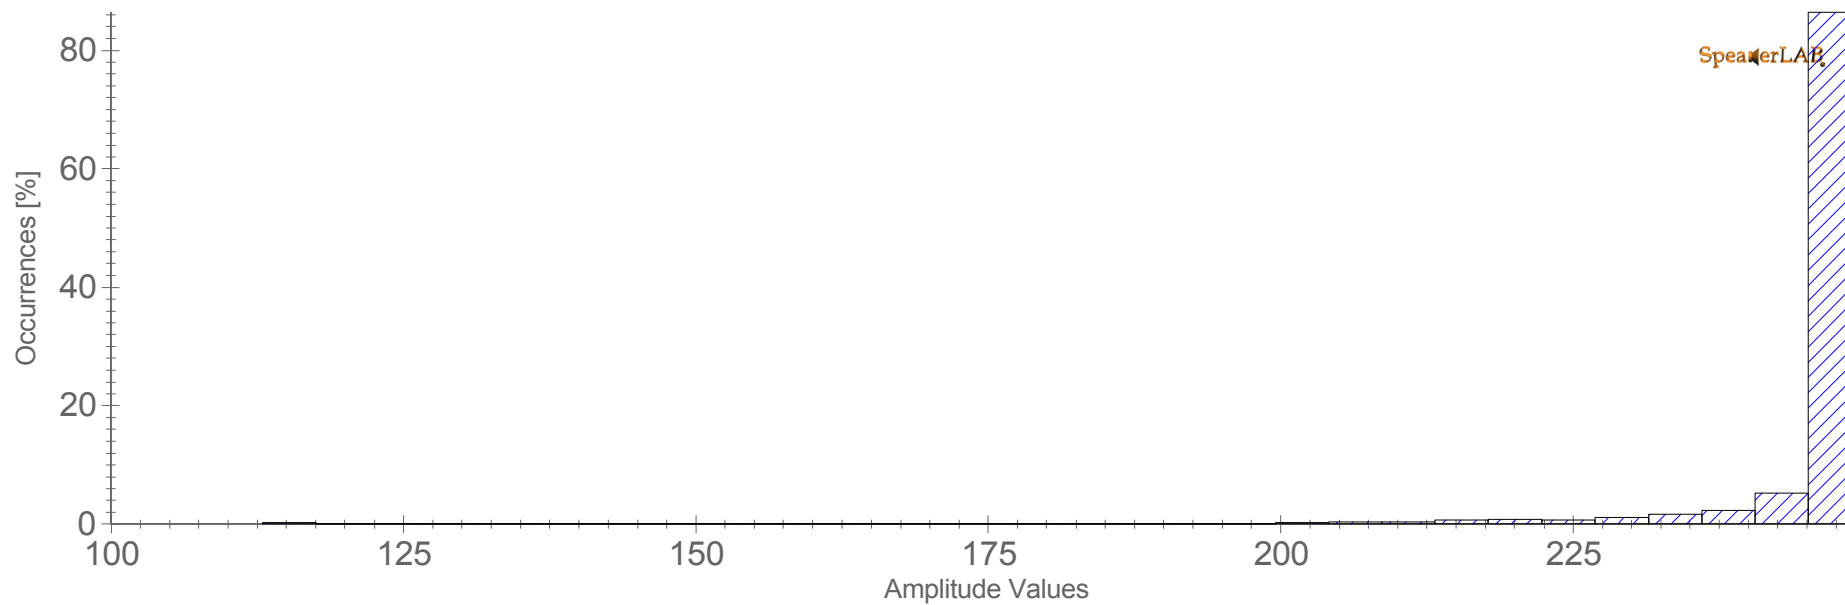
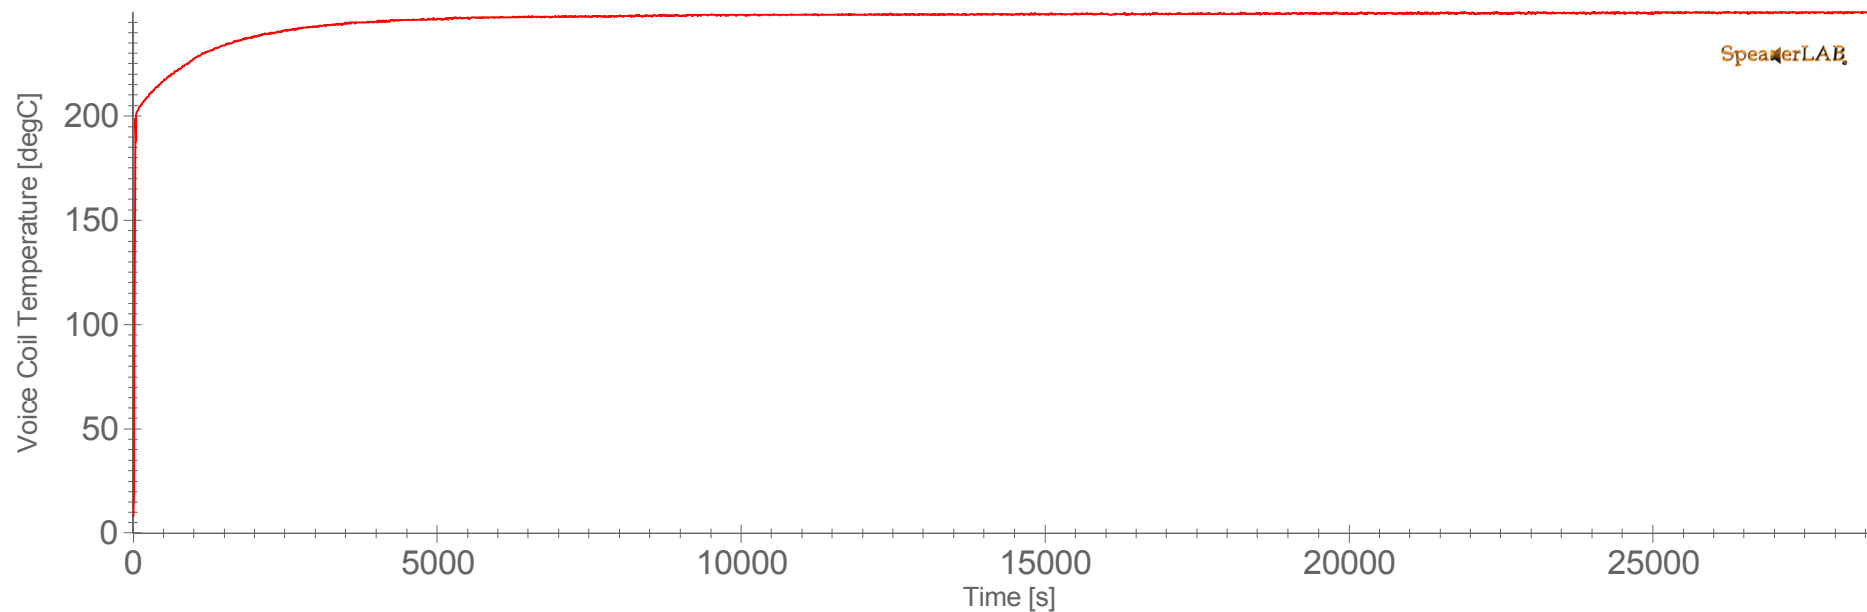


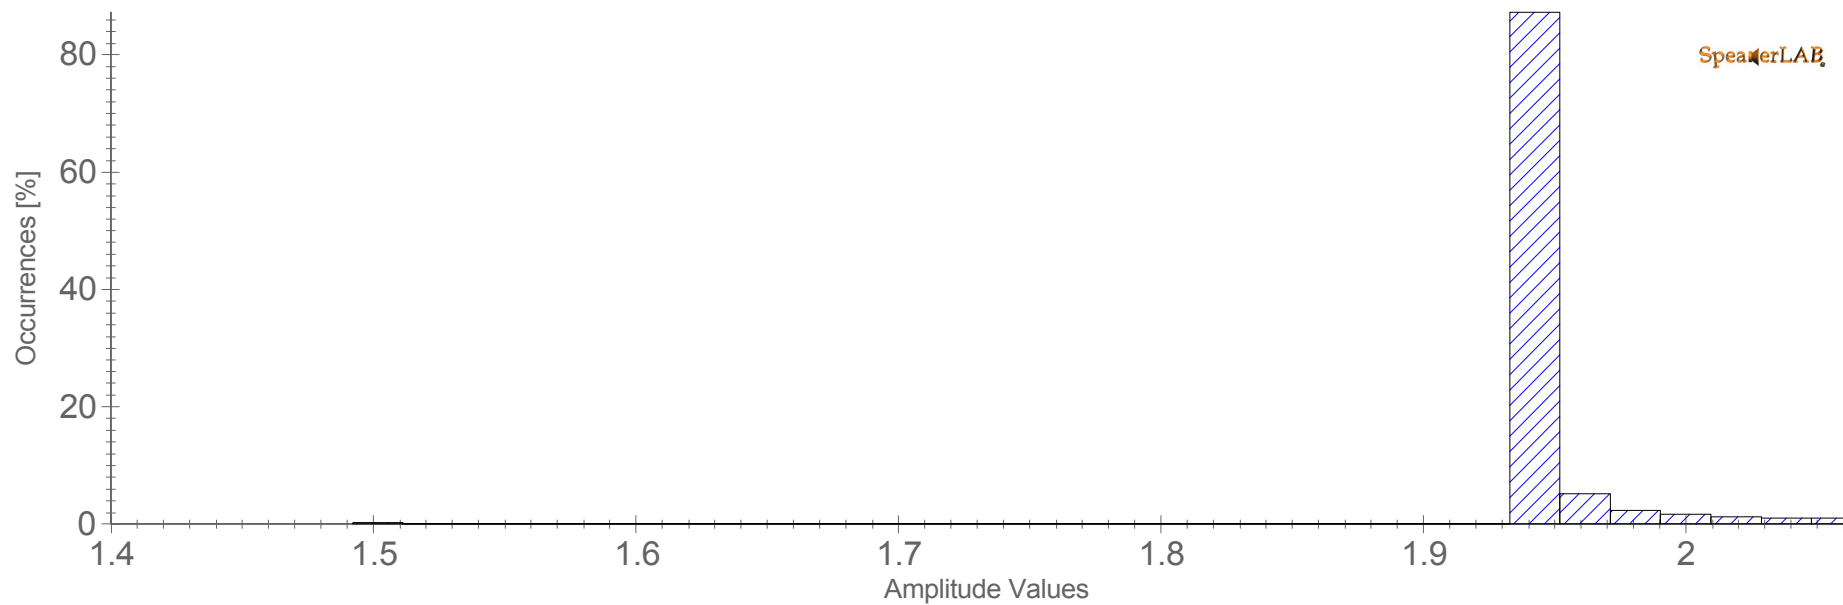
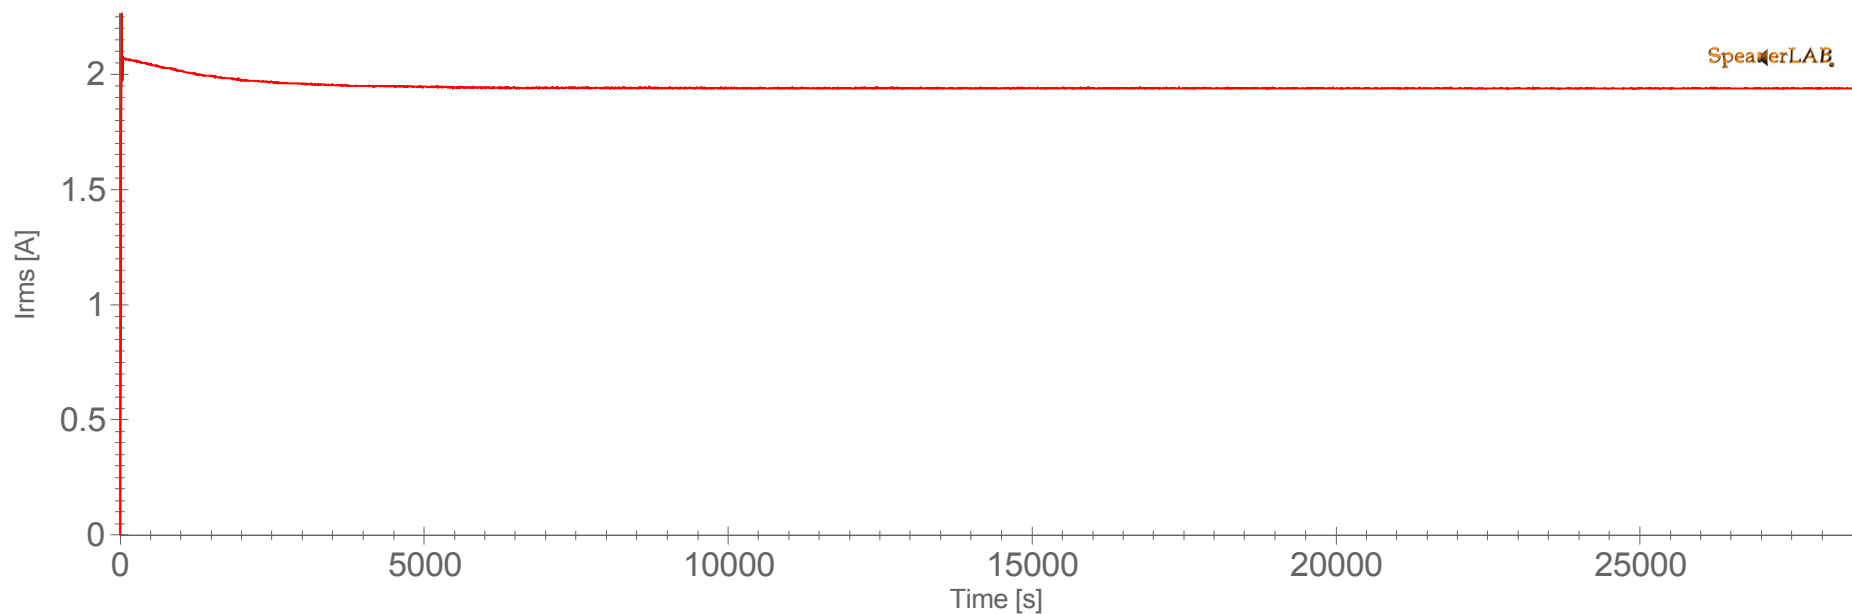


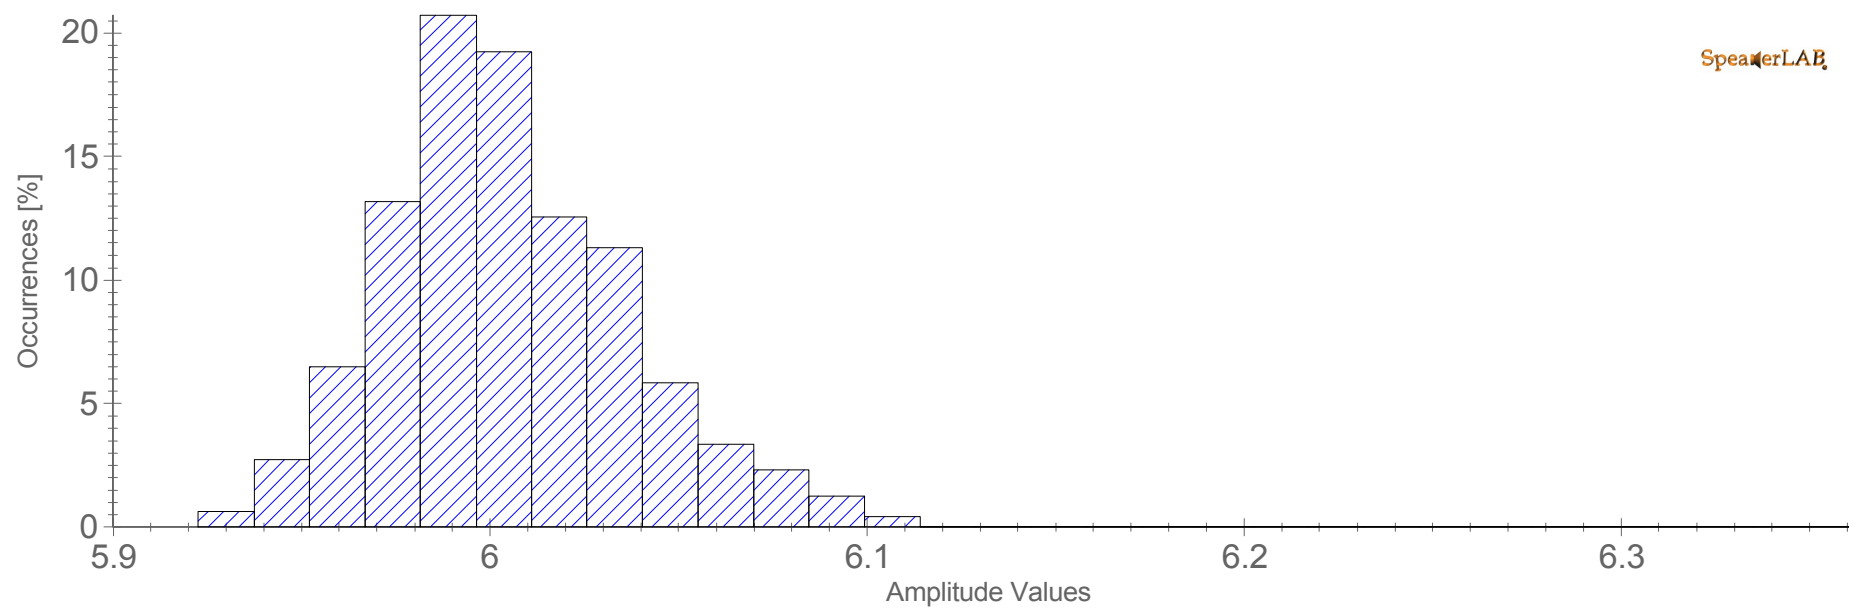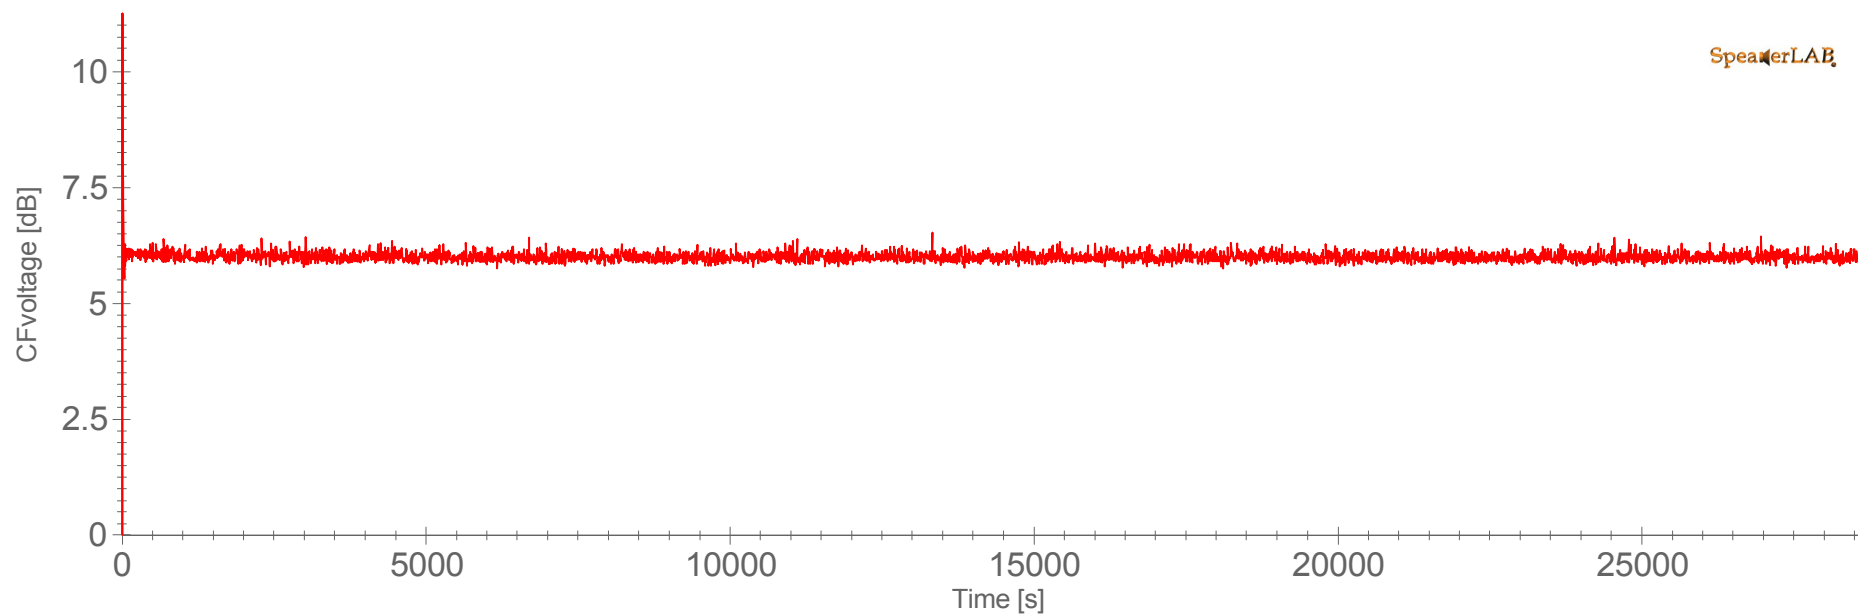

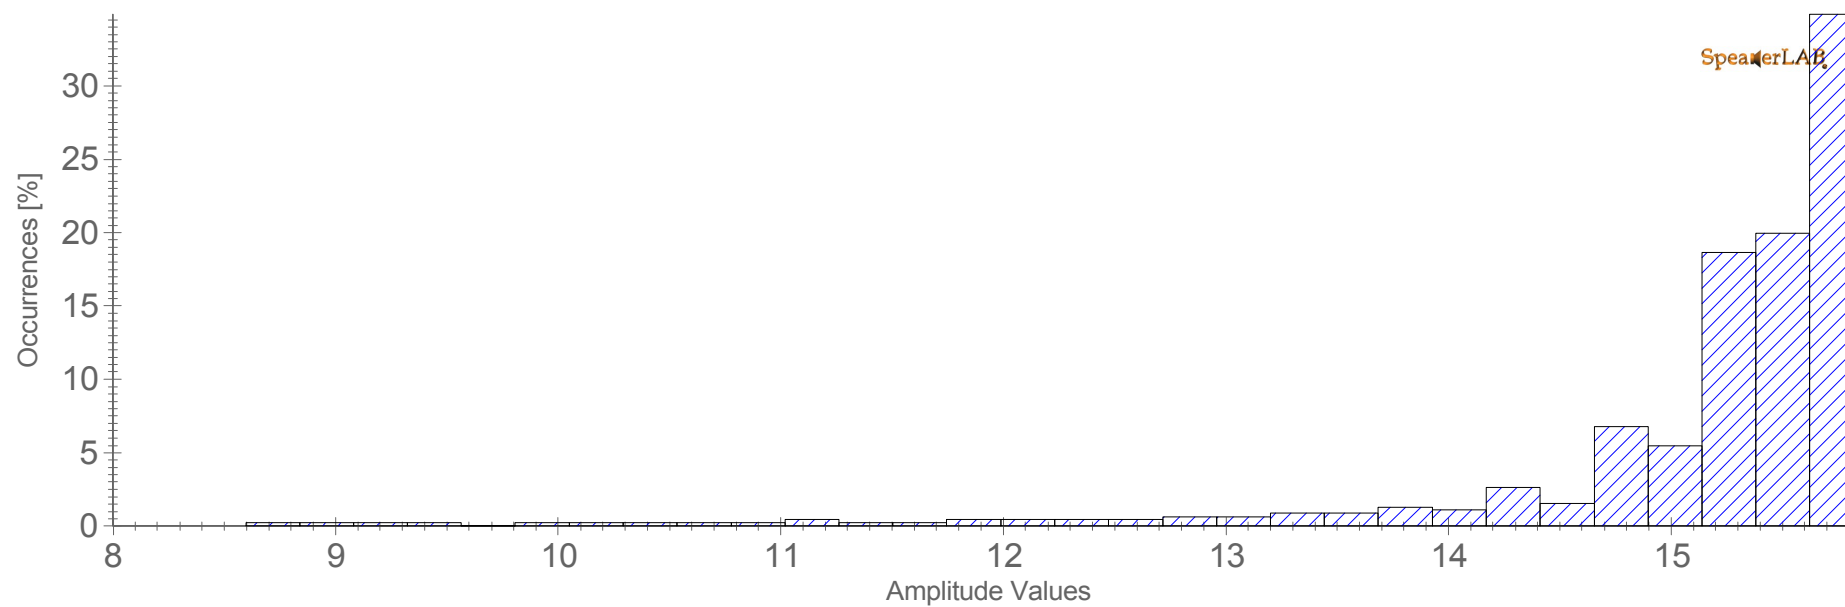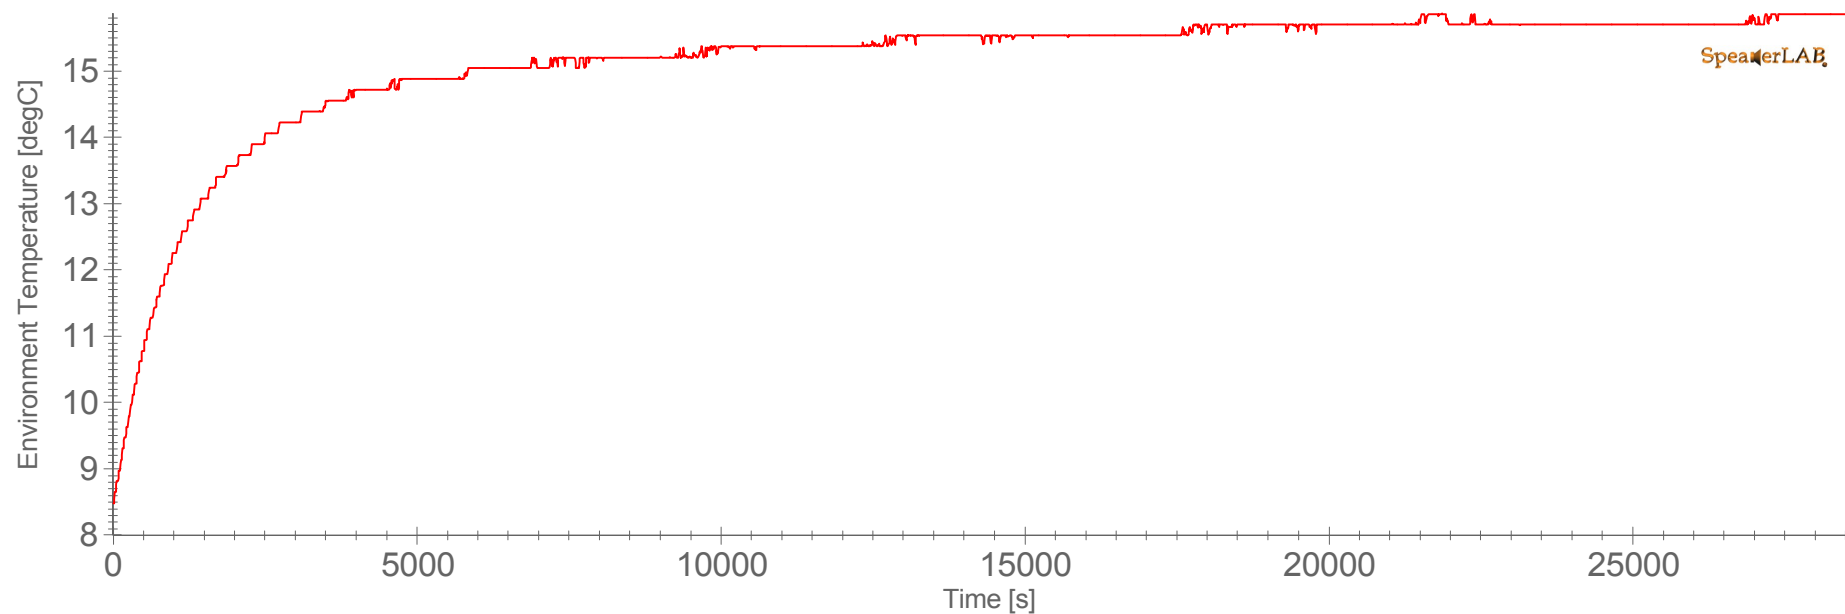

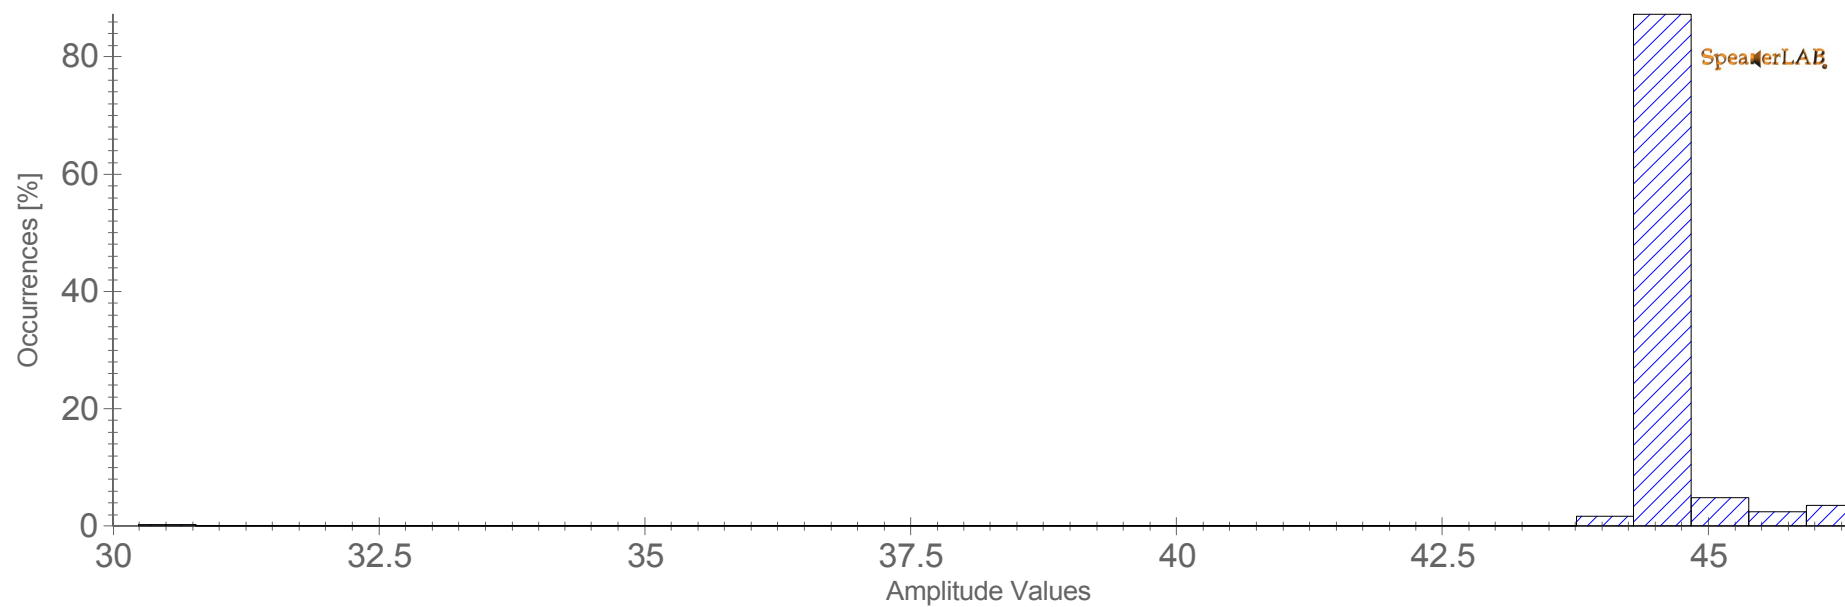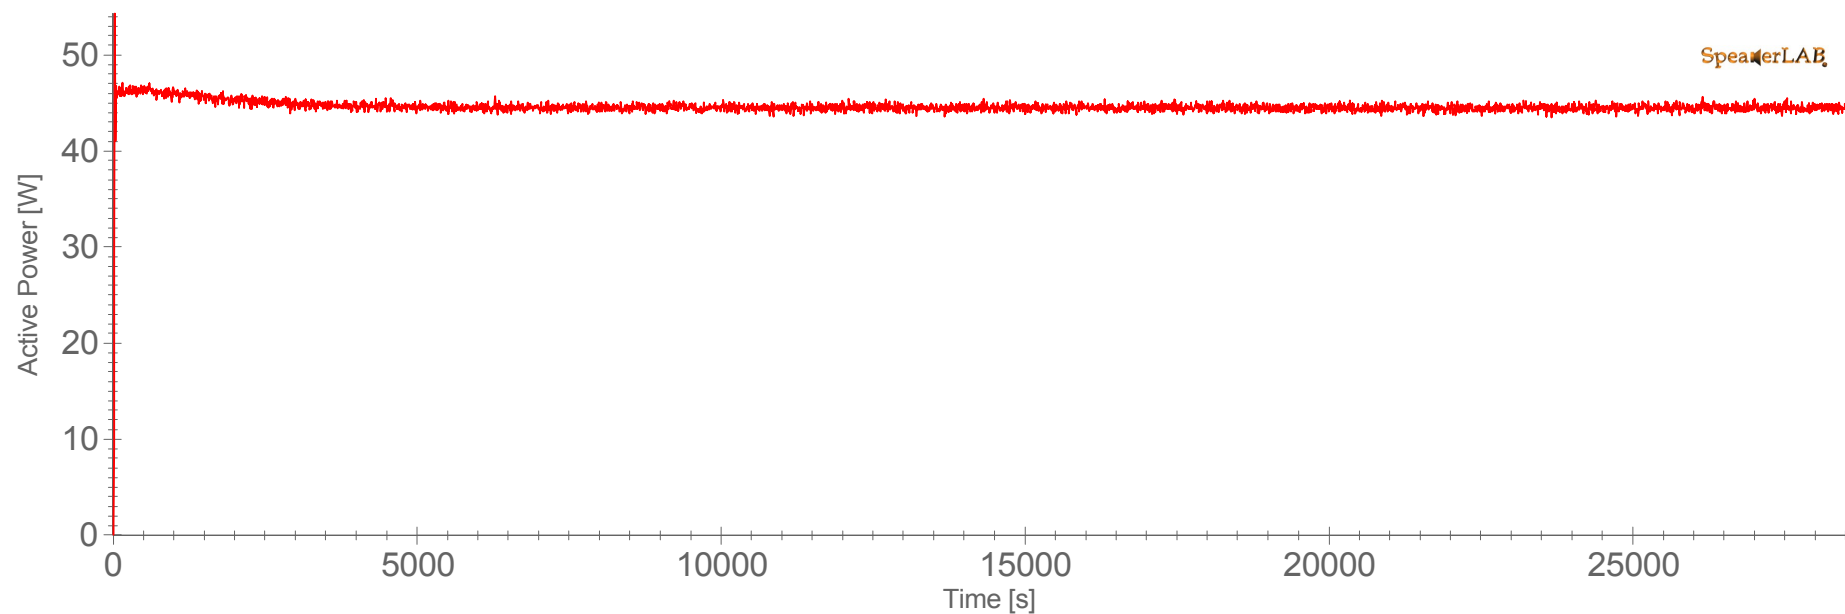

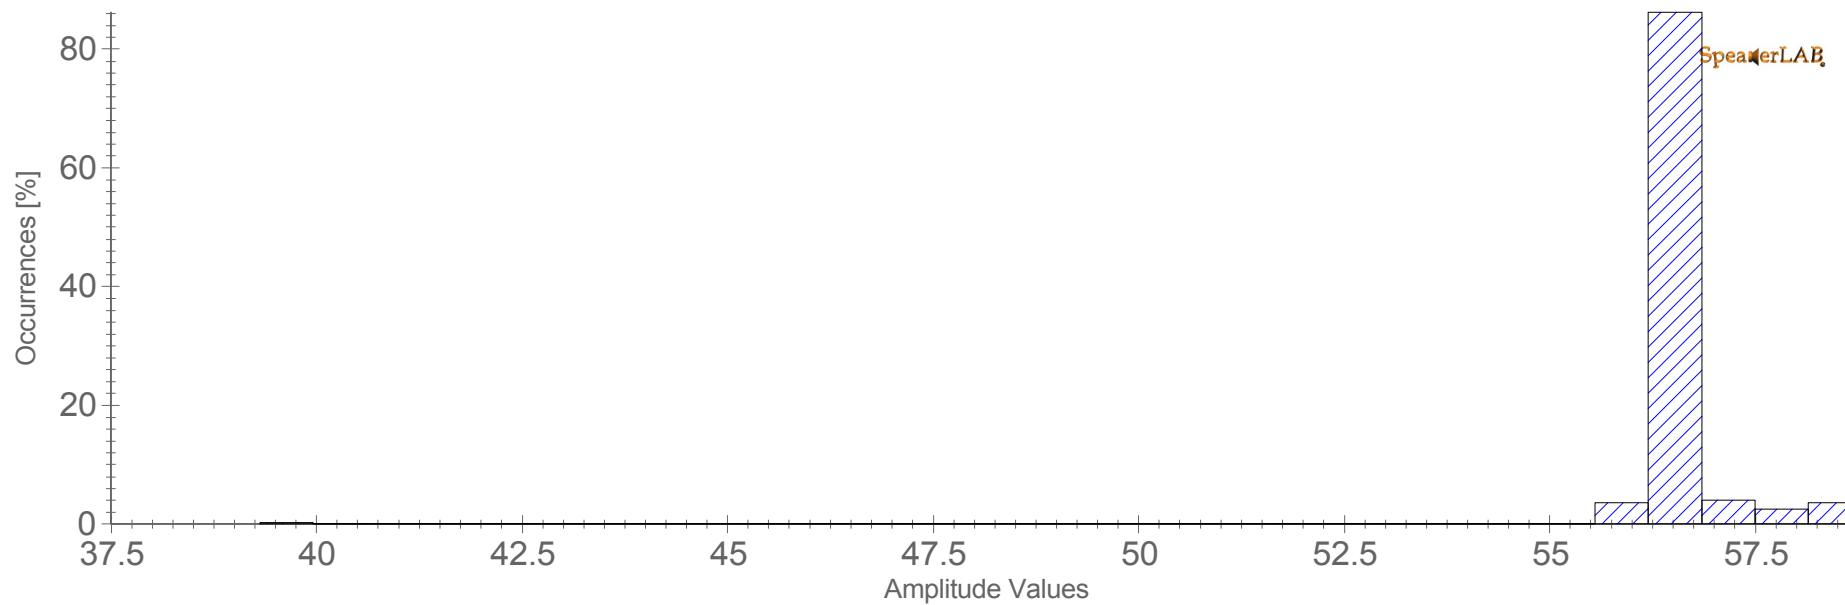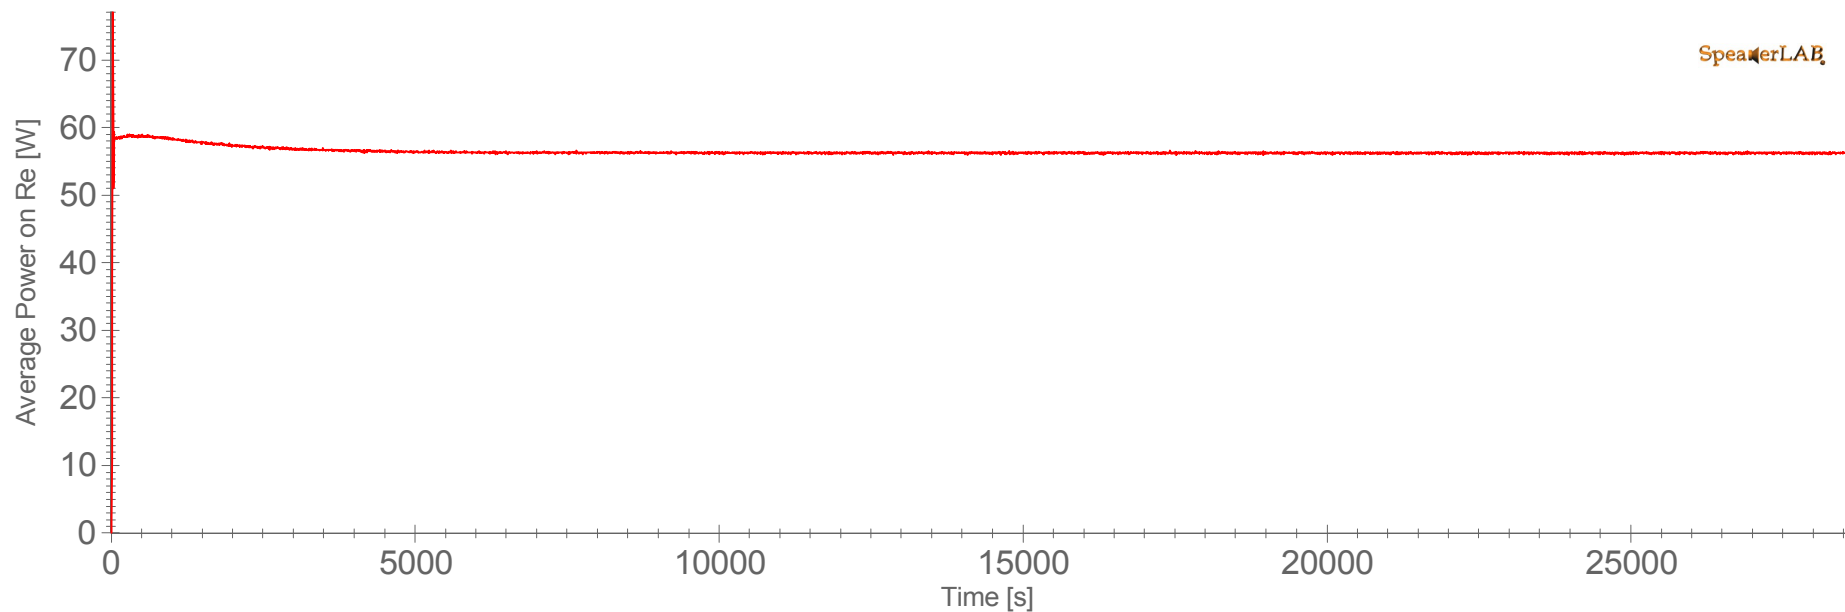

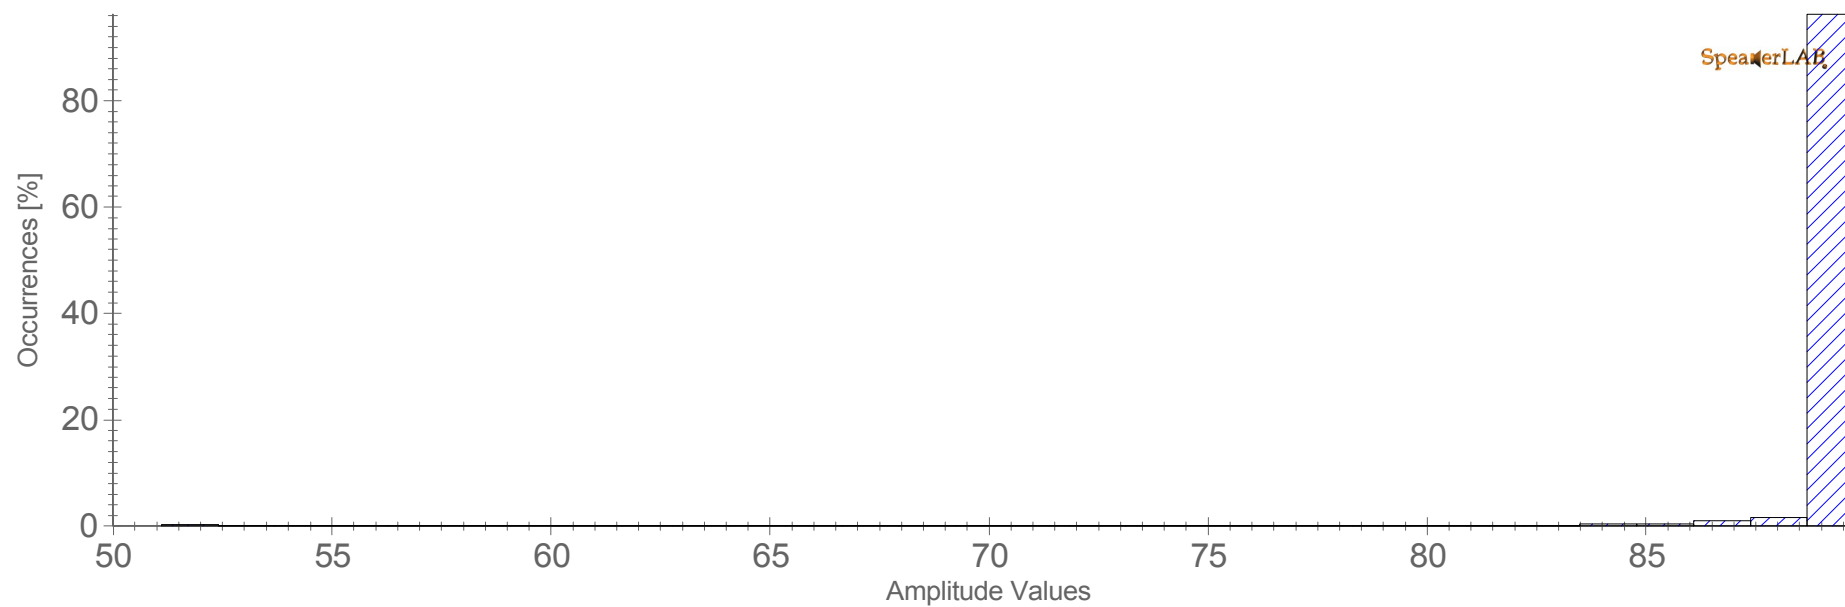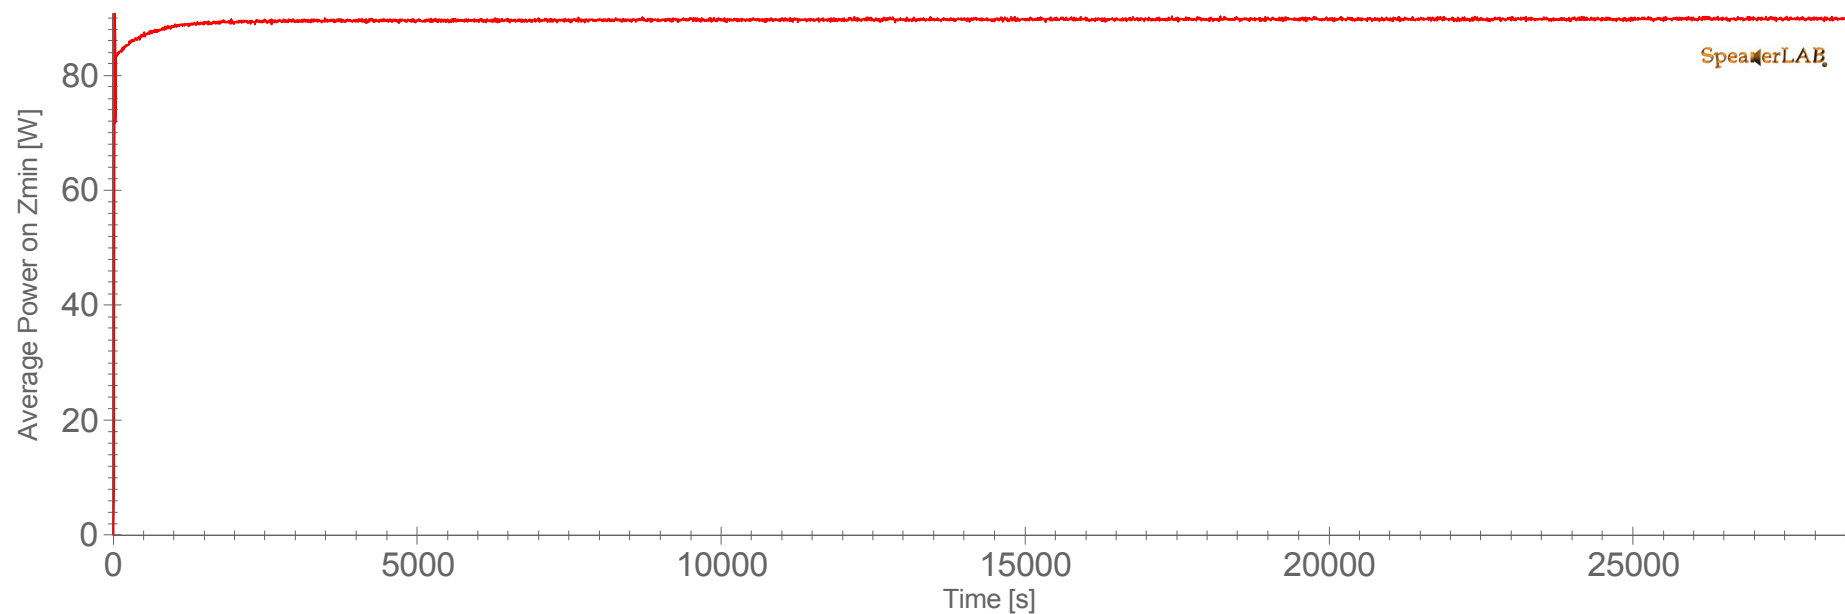

The End

FMJ-60 Daisy



We design this document to reduce ink waste

Please consider the environment before printing this document (and don't print this page)