

SpeakerLAB Report

CD721T

Author: Cinanni

Saved: 29/11/2013 14.50.43

Printed: 25/02/2014 15.42.55



Summary



CD721T



Author	_____	Cinanni
Re	_____	5,467 Ohm
Zmin	_____	6,700 Ohm
Signal type	_____	Pink Noise
Signal application	_____	Continuous
Normative	_____	Custom
Vrms (time average)	_____	NaN V
VC material	_____	Aluminium
VC initial Temperature	_____	11,109 degC
Initial Date and Time	_____	29/11/2013 14.50.43
Final Date and Time	_____	29/11/2013 16.50.44
Test duration	_____	0 02:00:00
Limits	_____	Limits disabled
Results	_____	Final time reach. Test OK
HW Version	_____	Lite







Printed: 25/02/2014 15.43.00

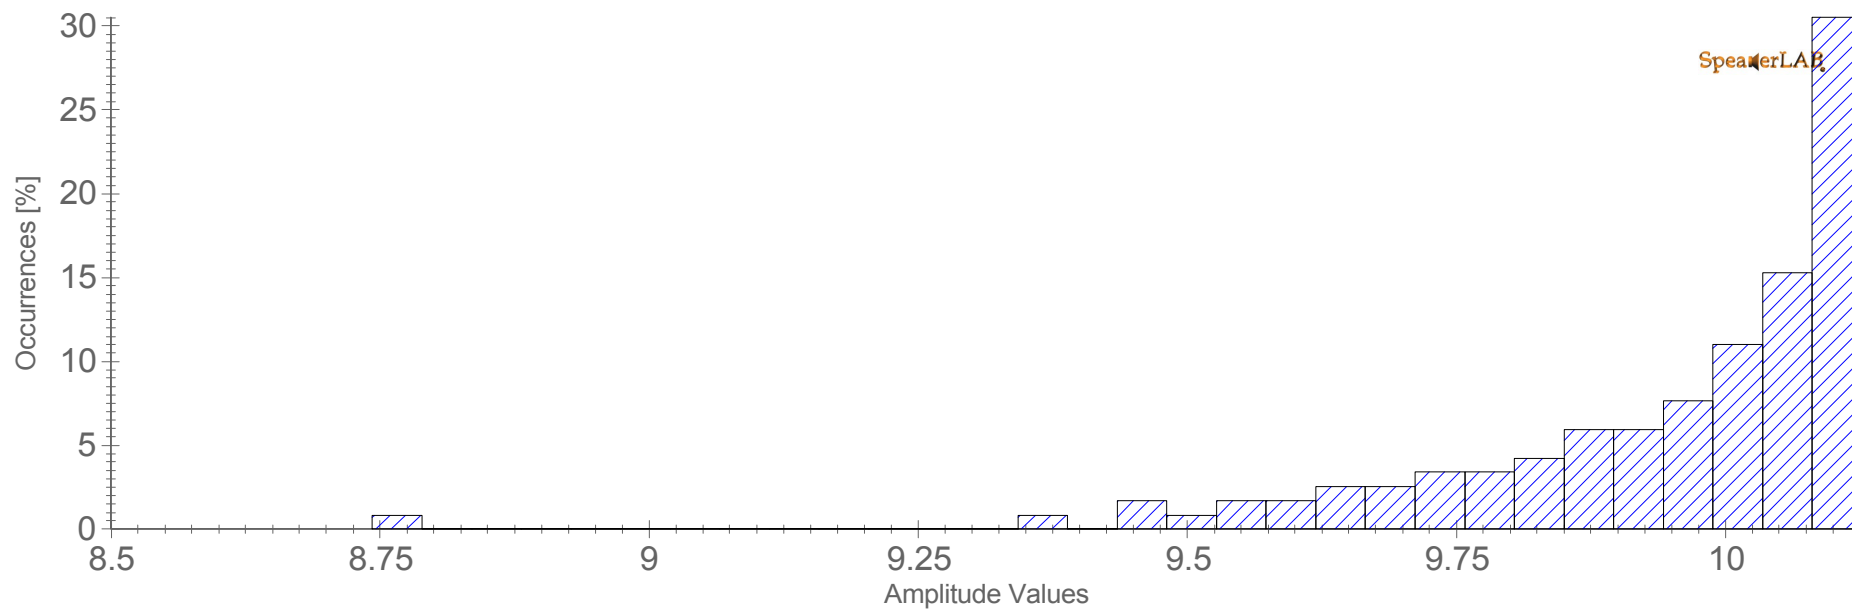
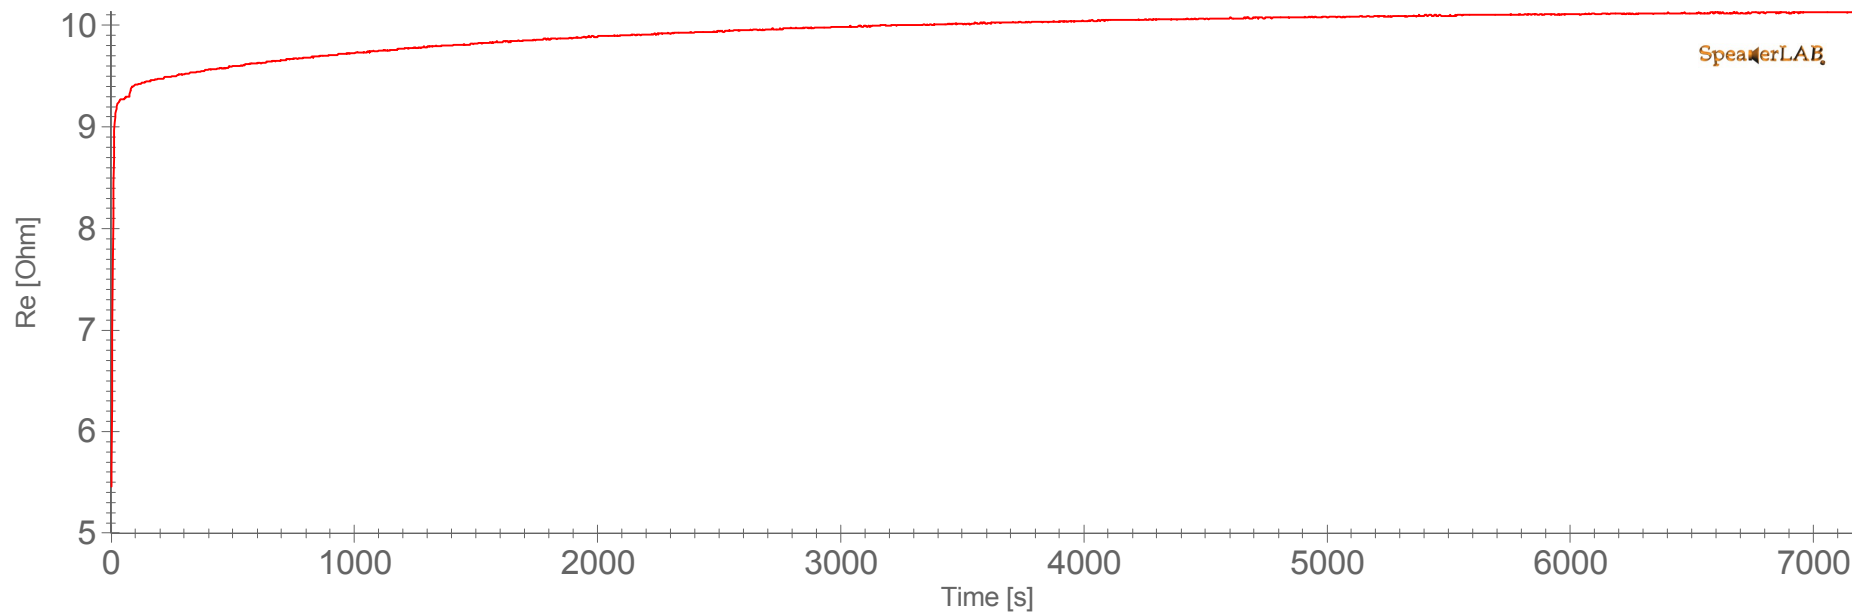


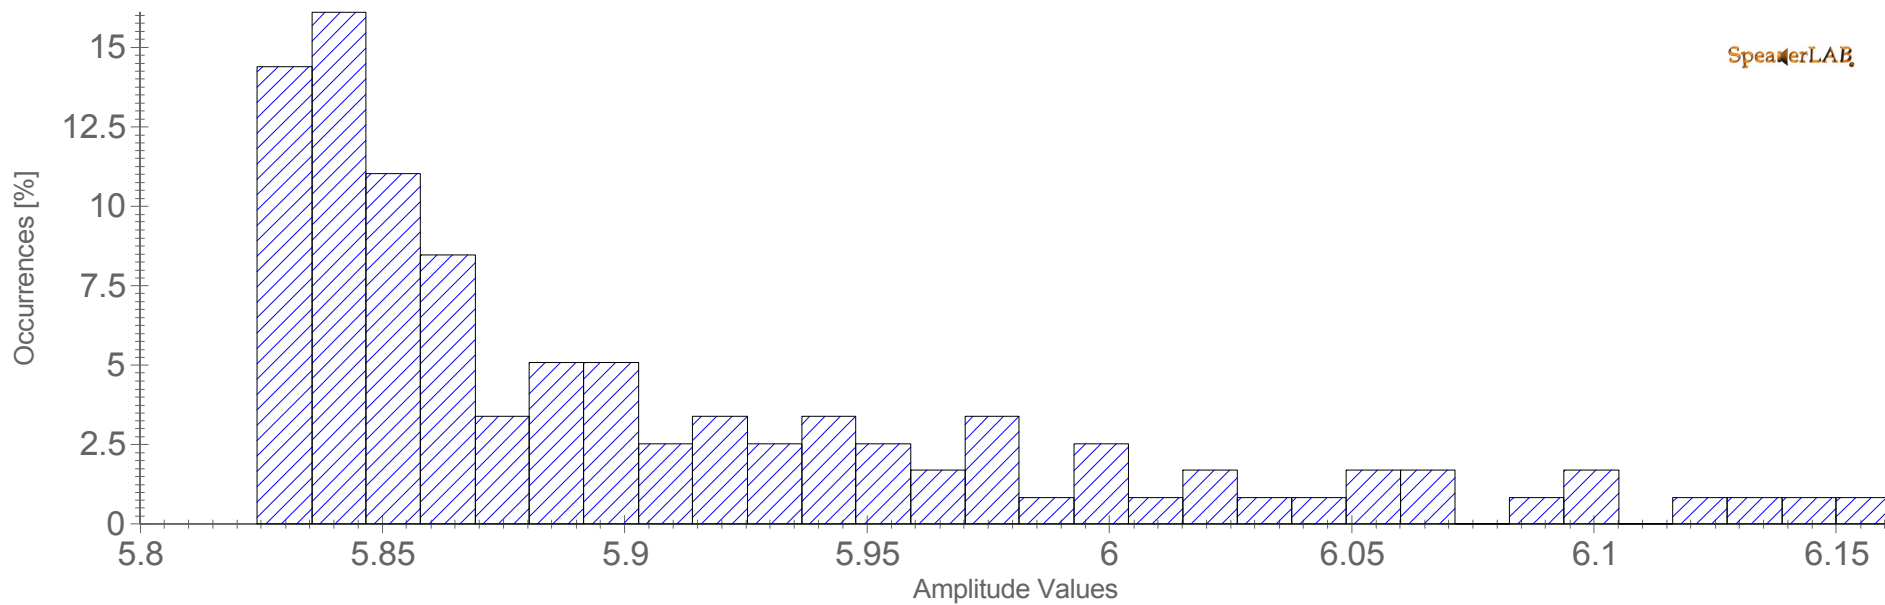
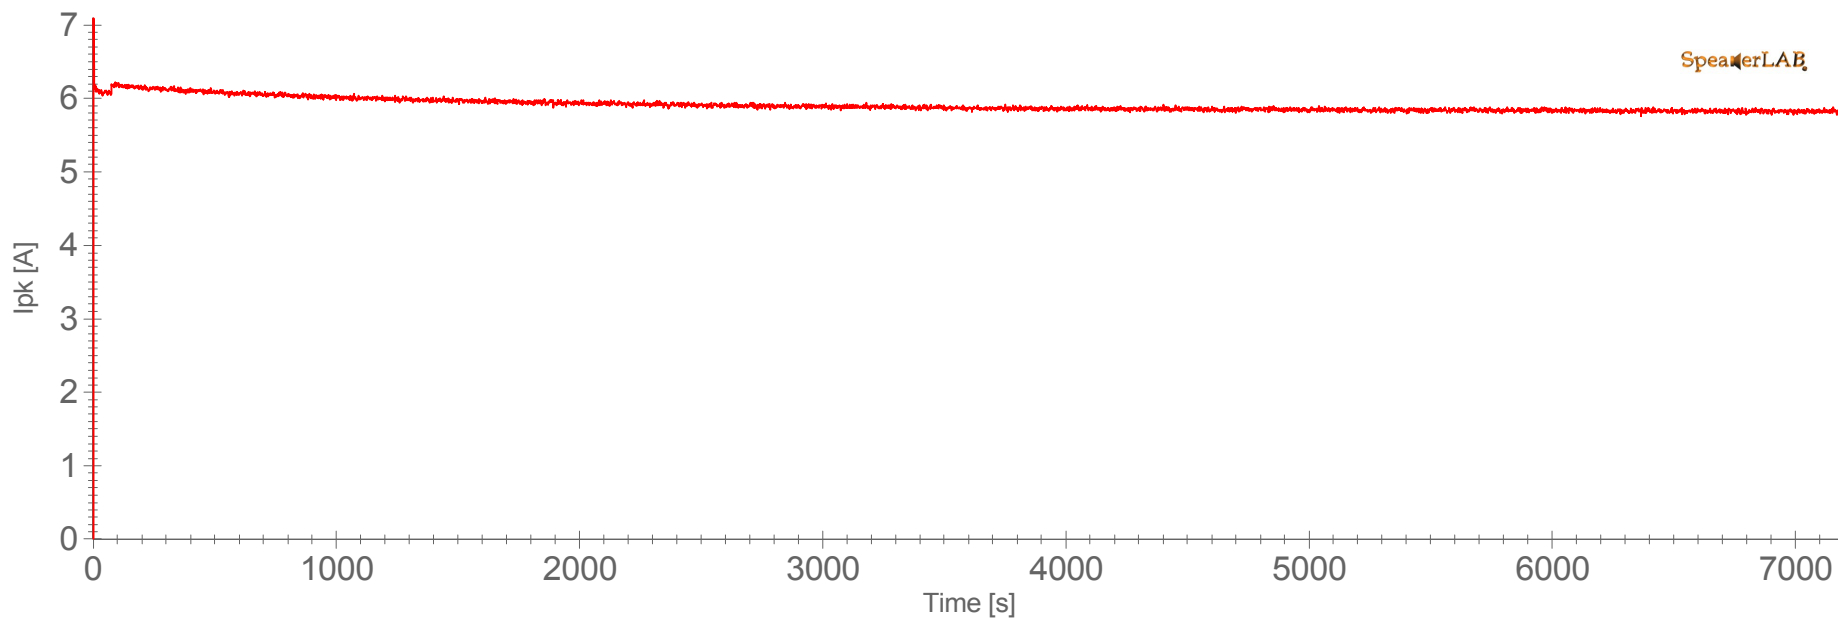


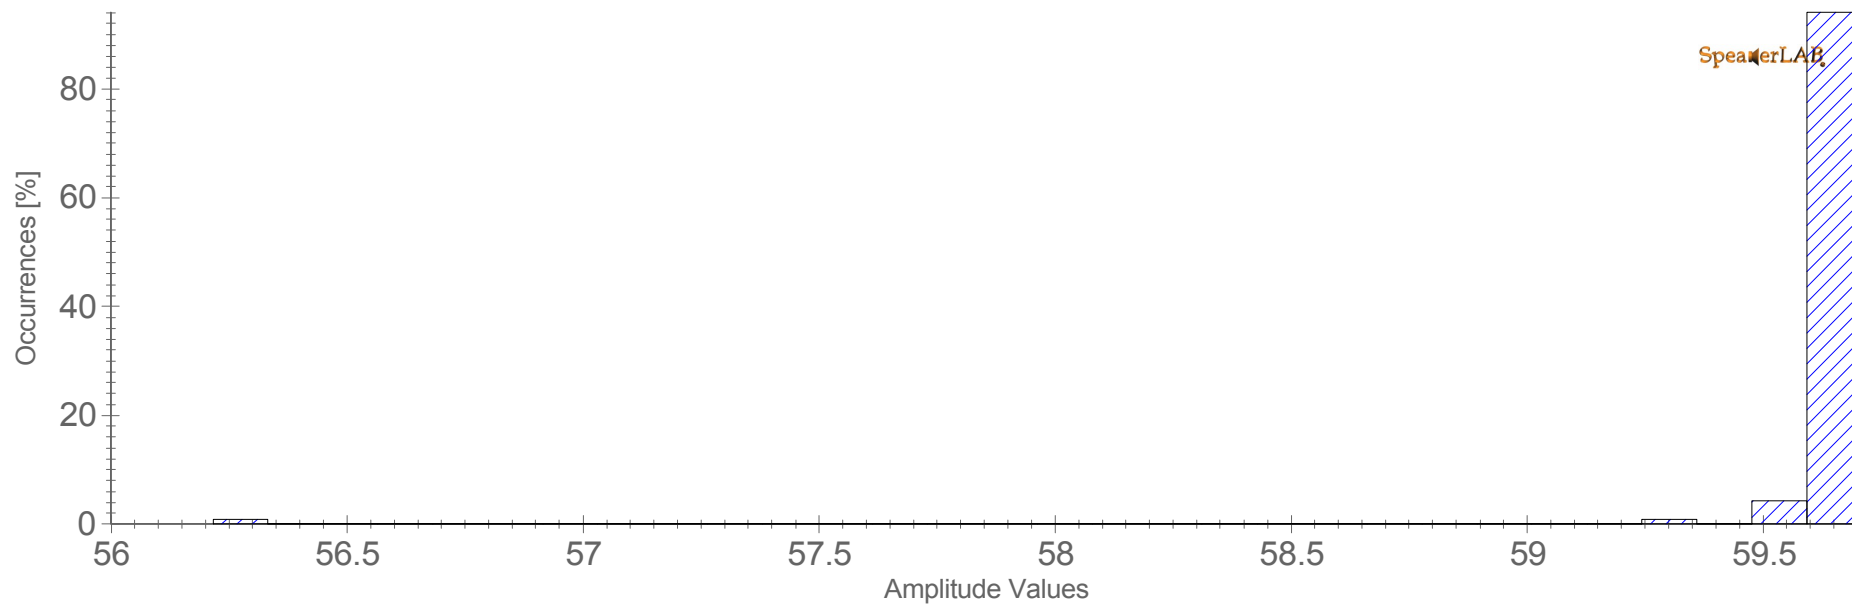
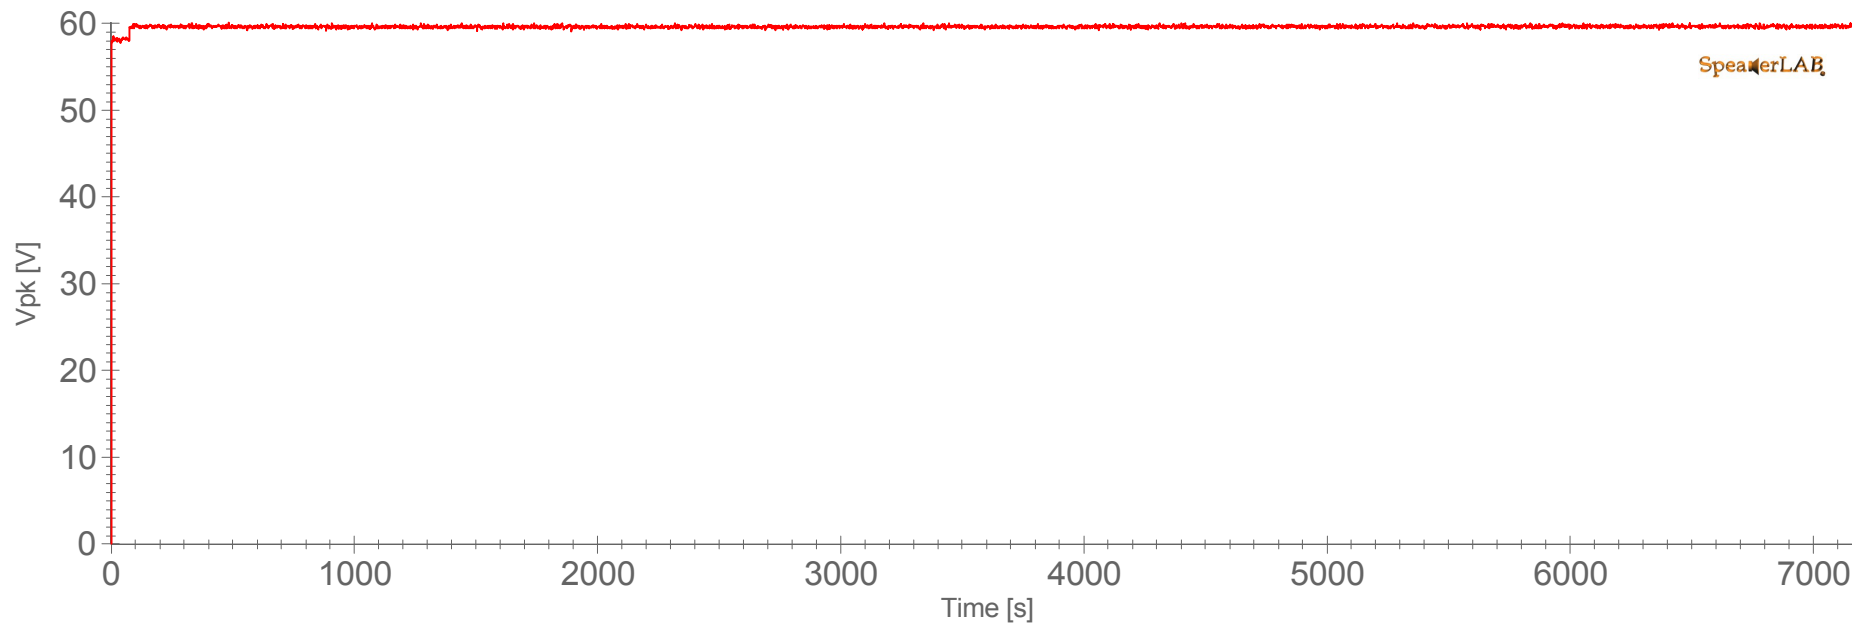


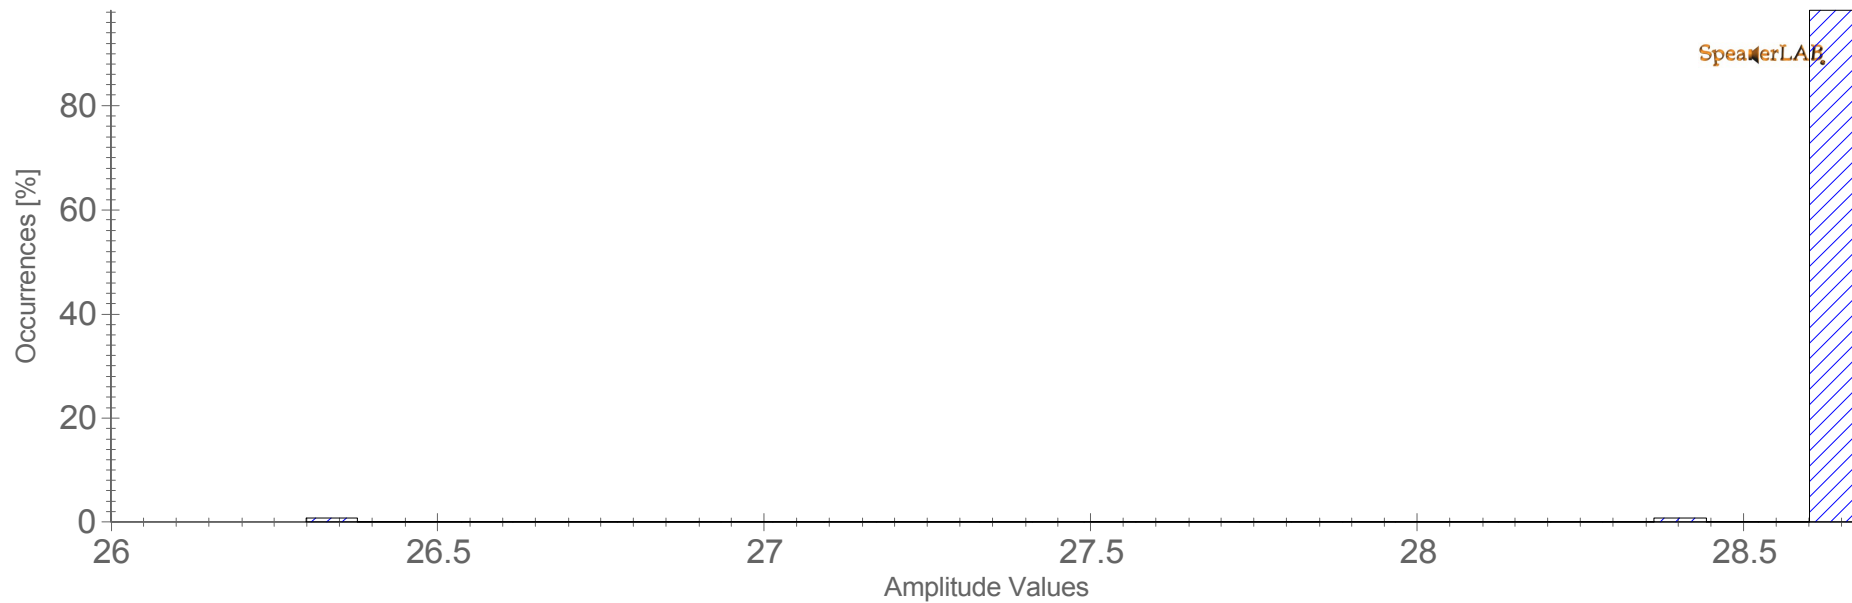
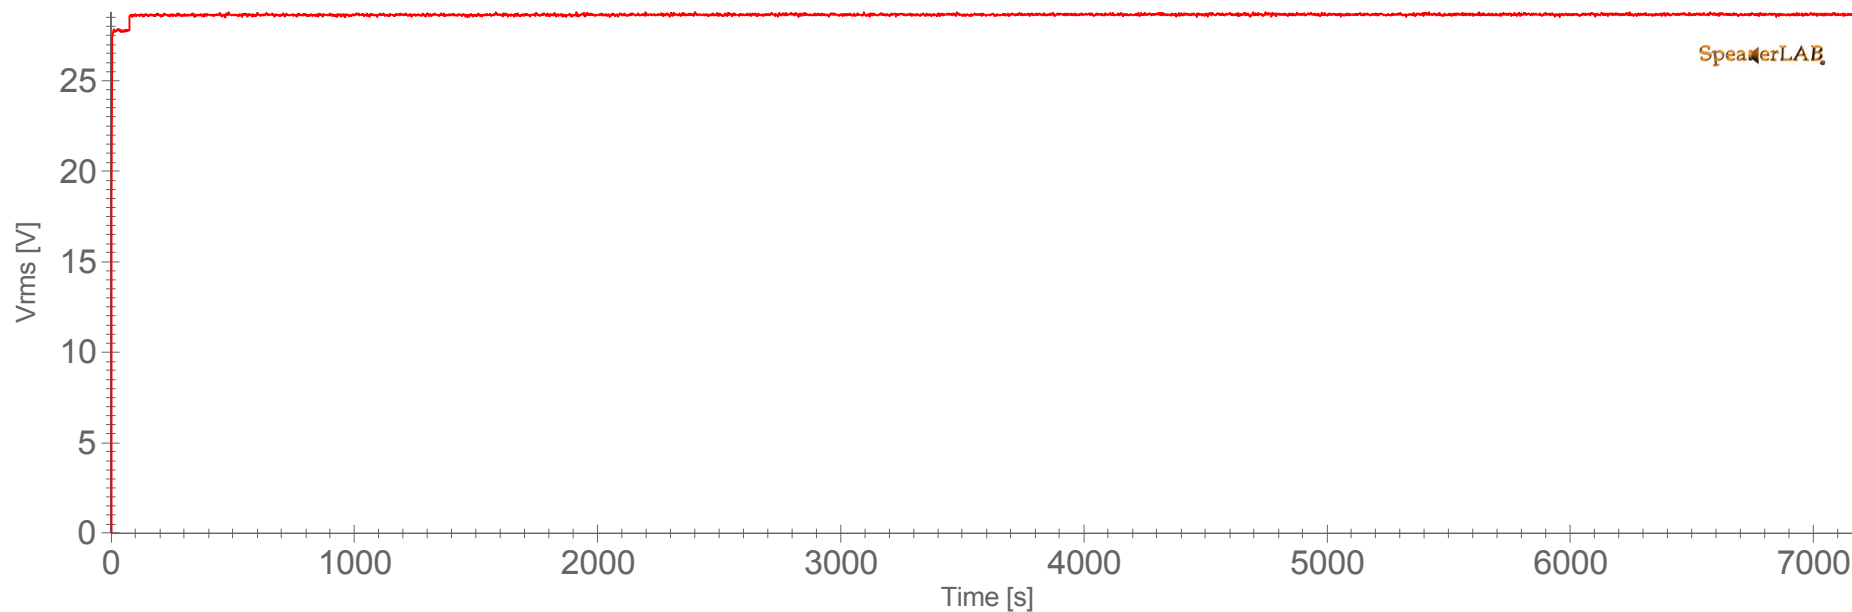


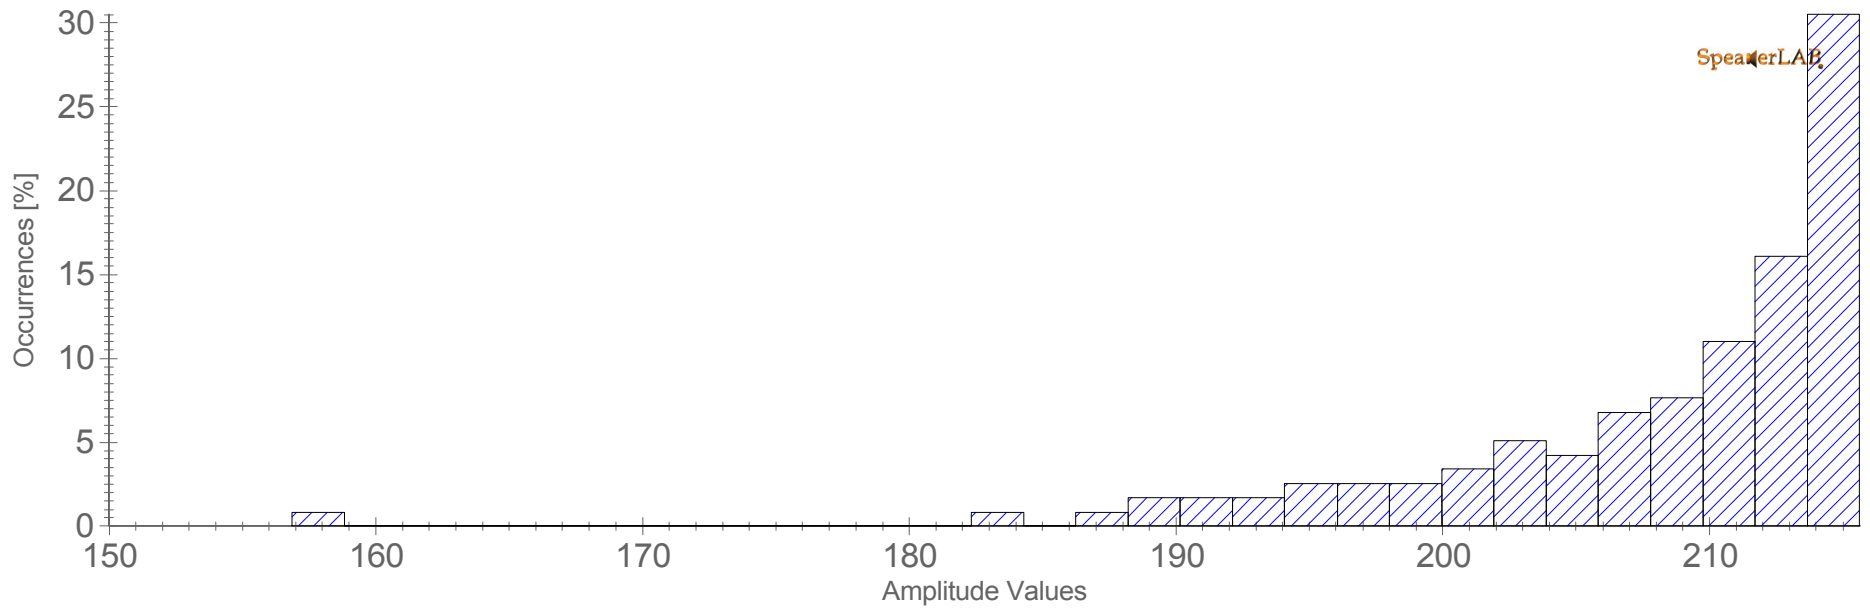
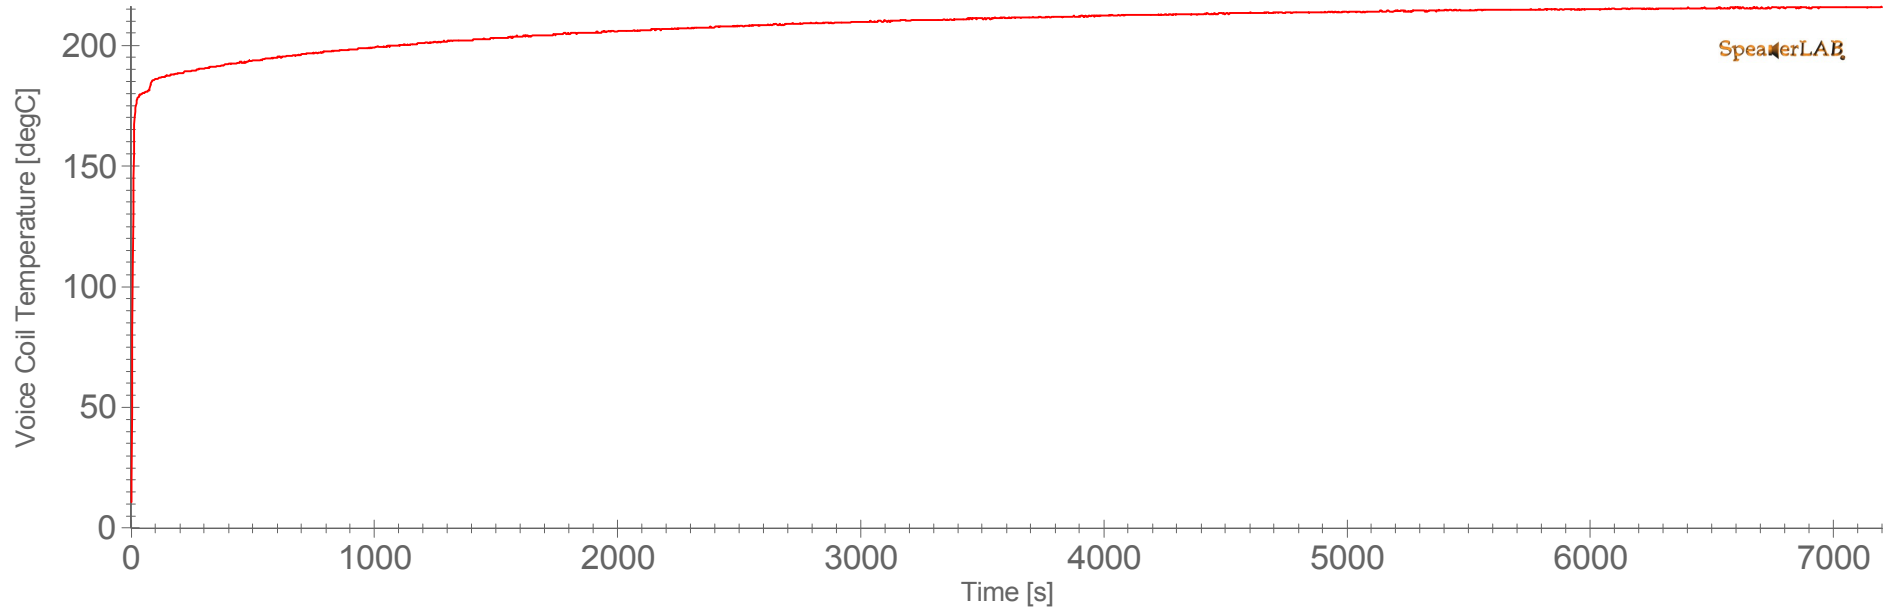


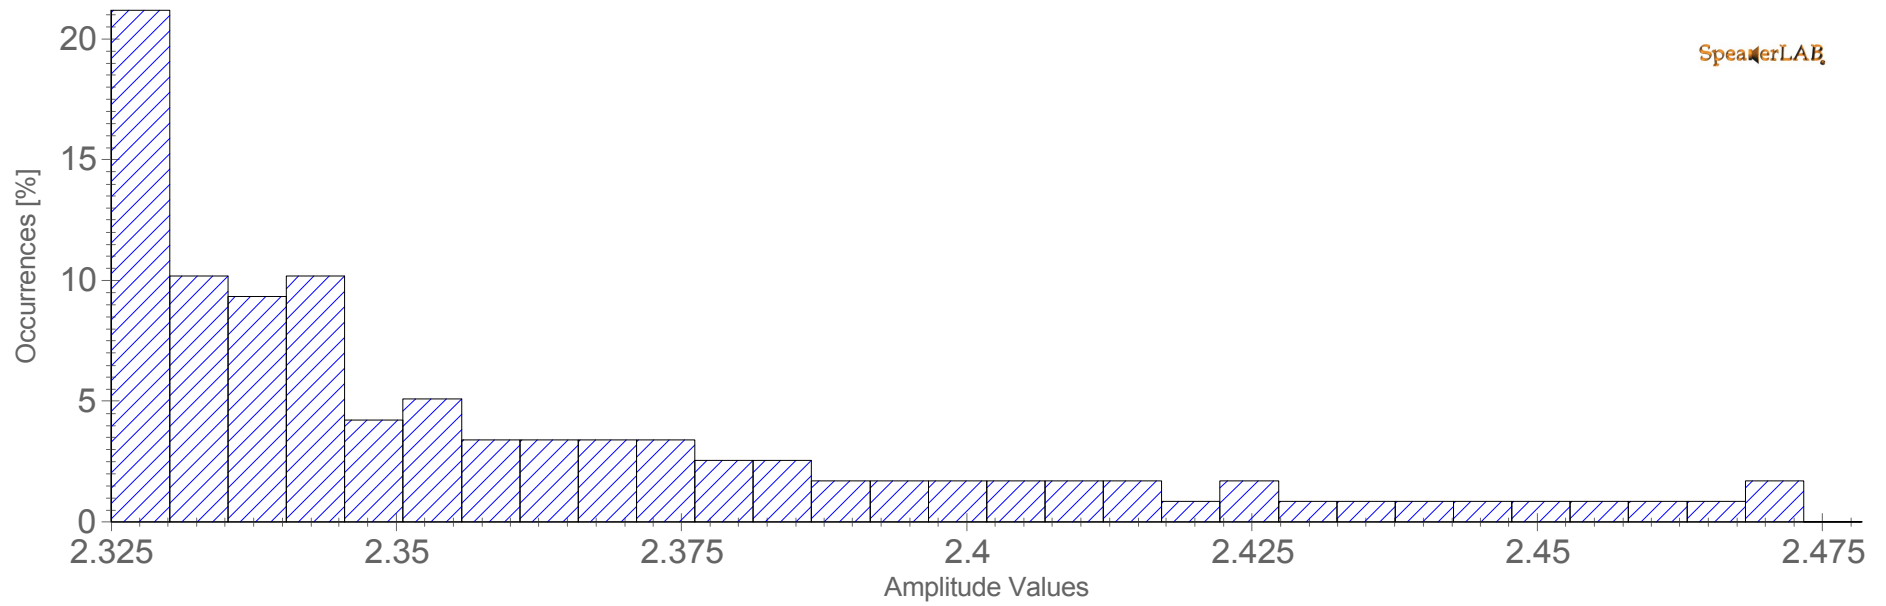
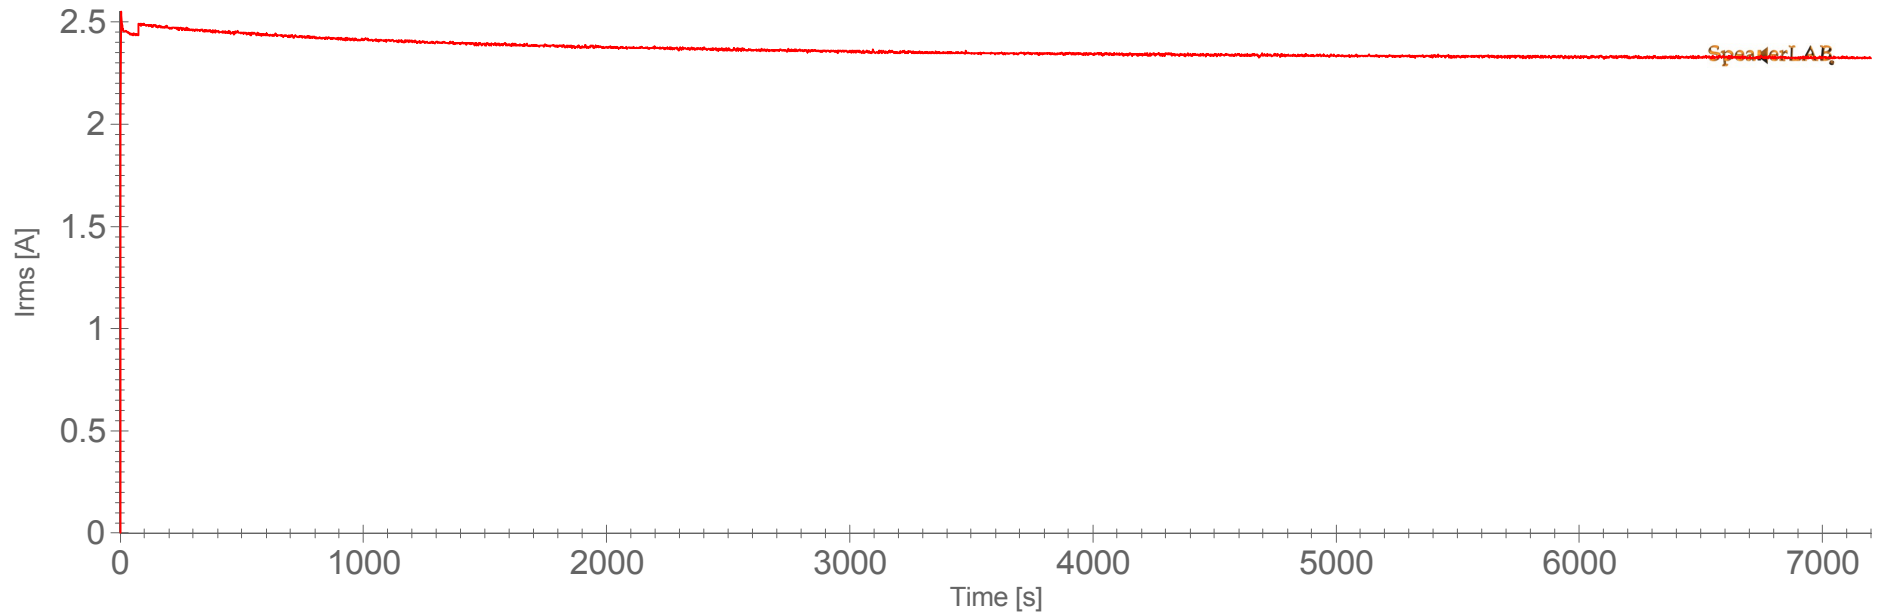


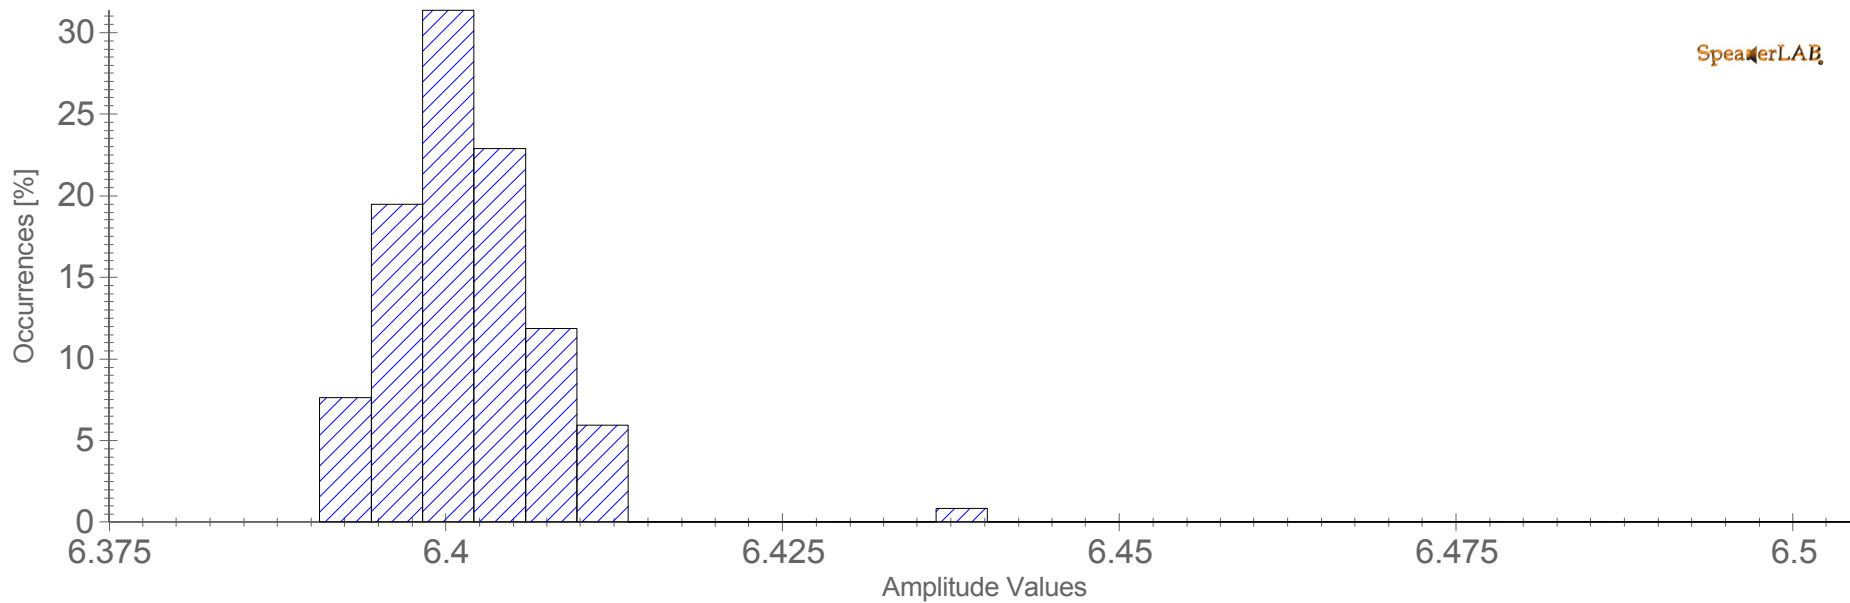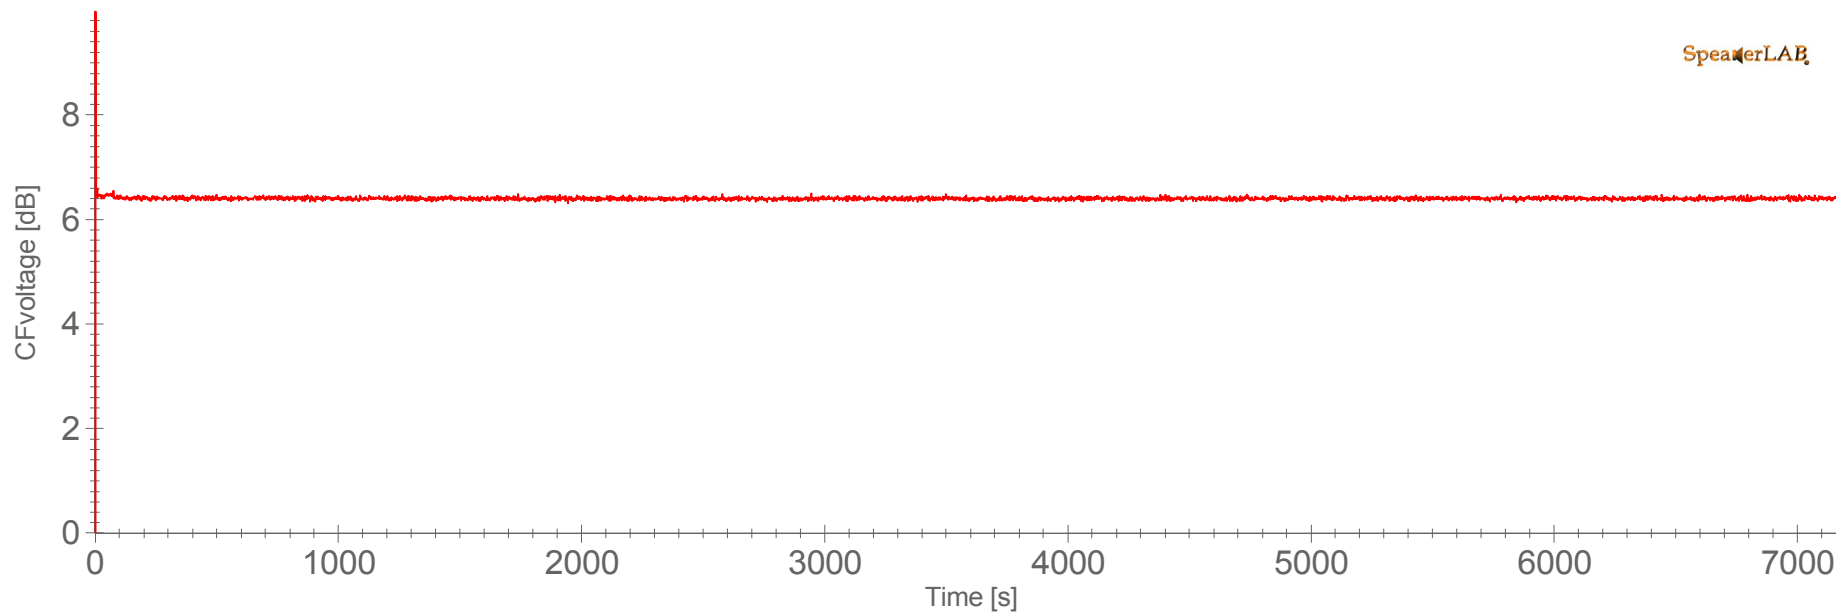

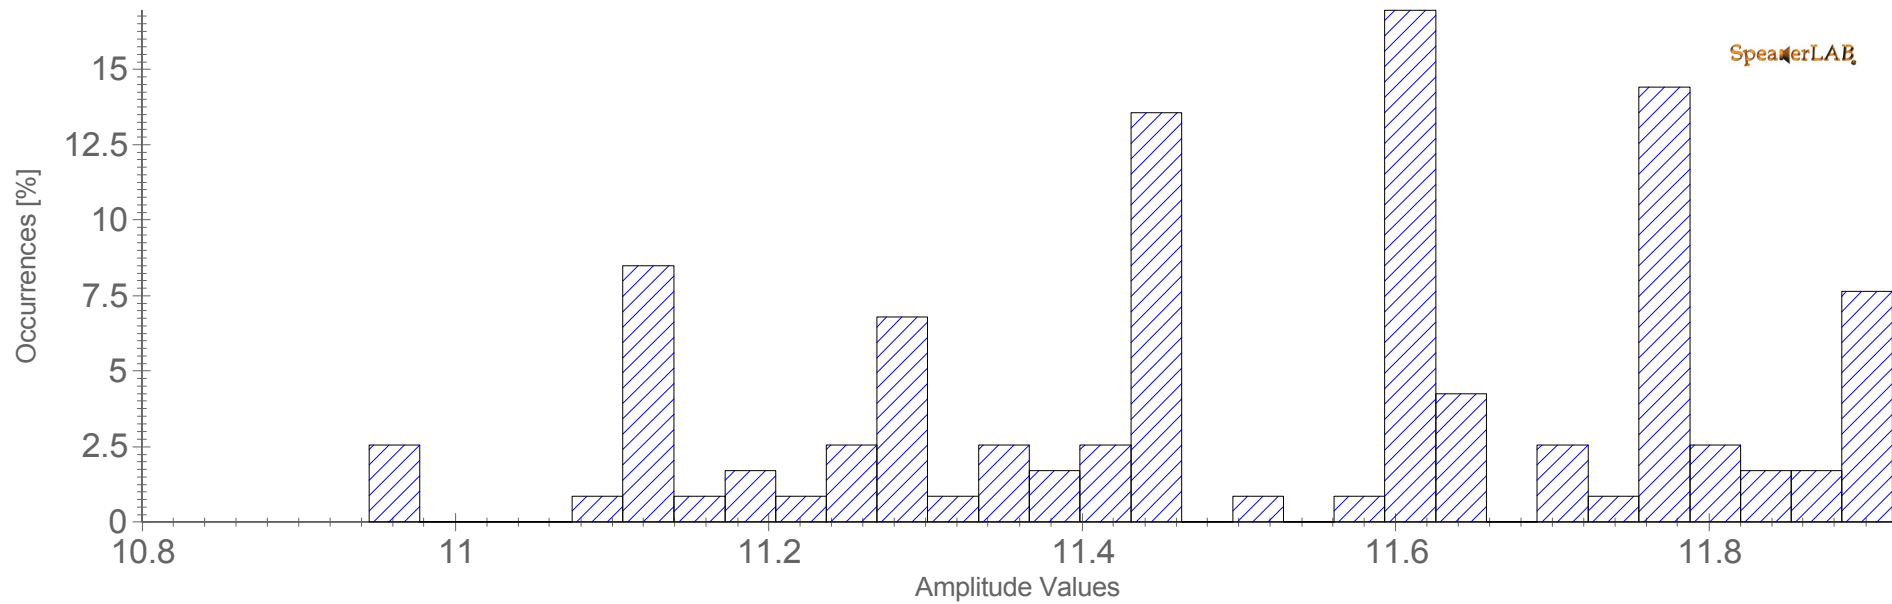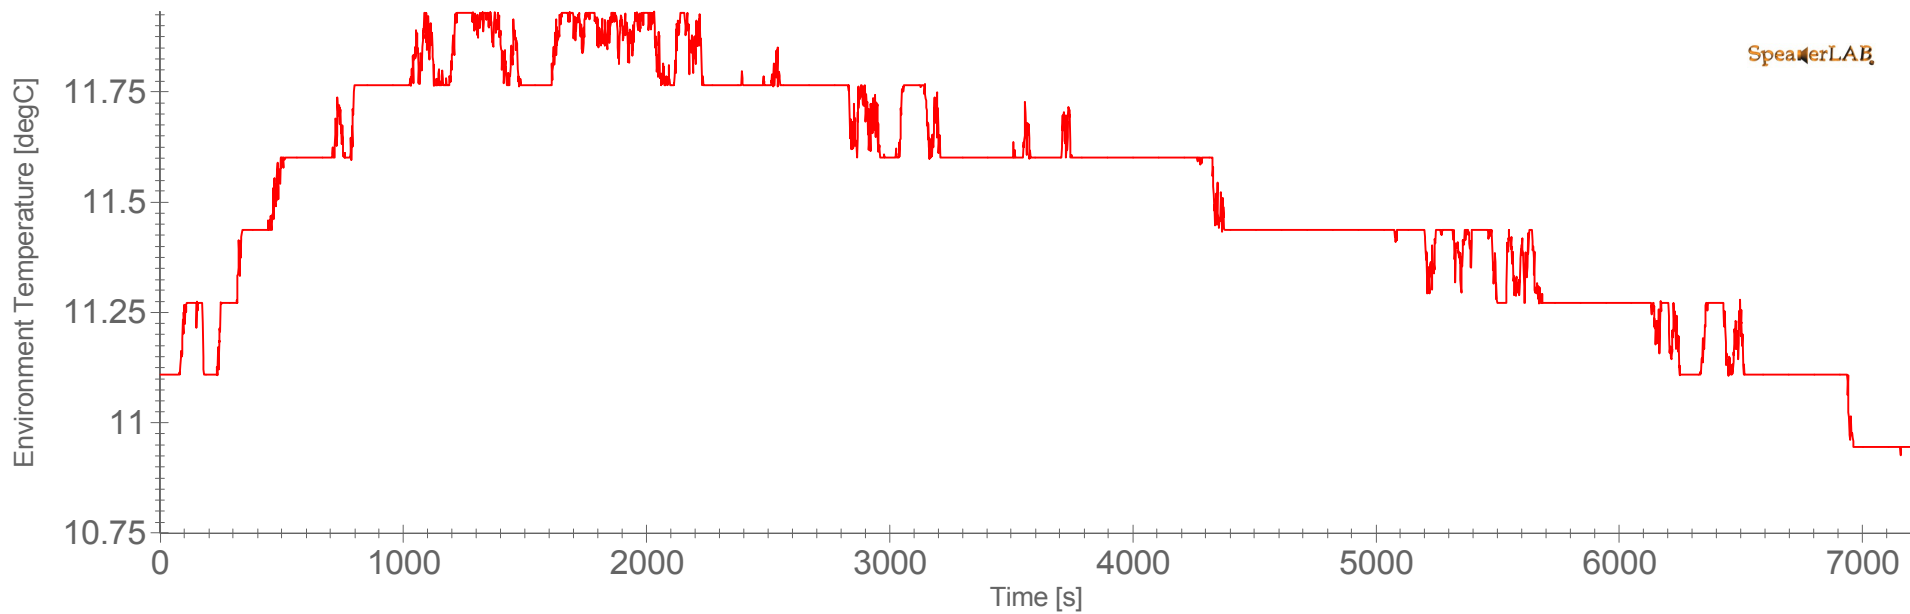

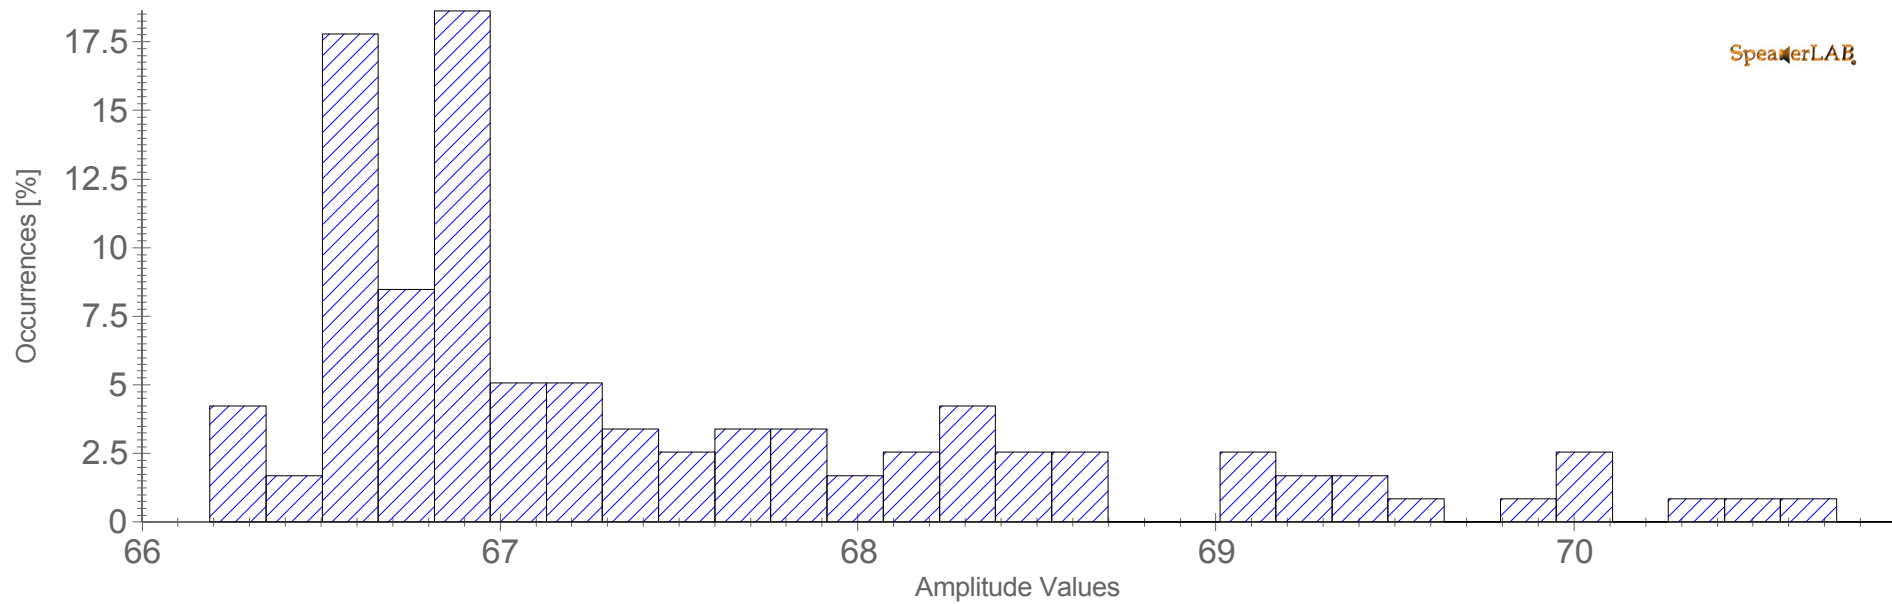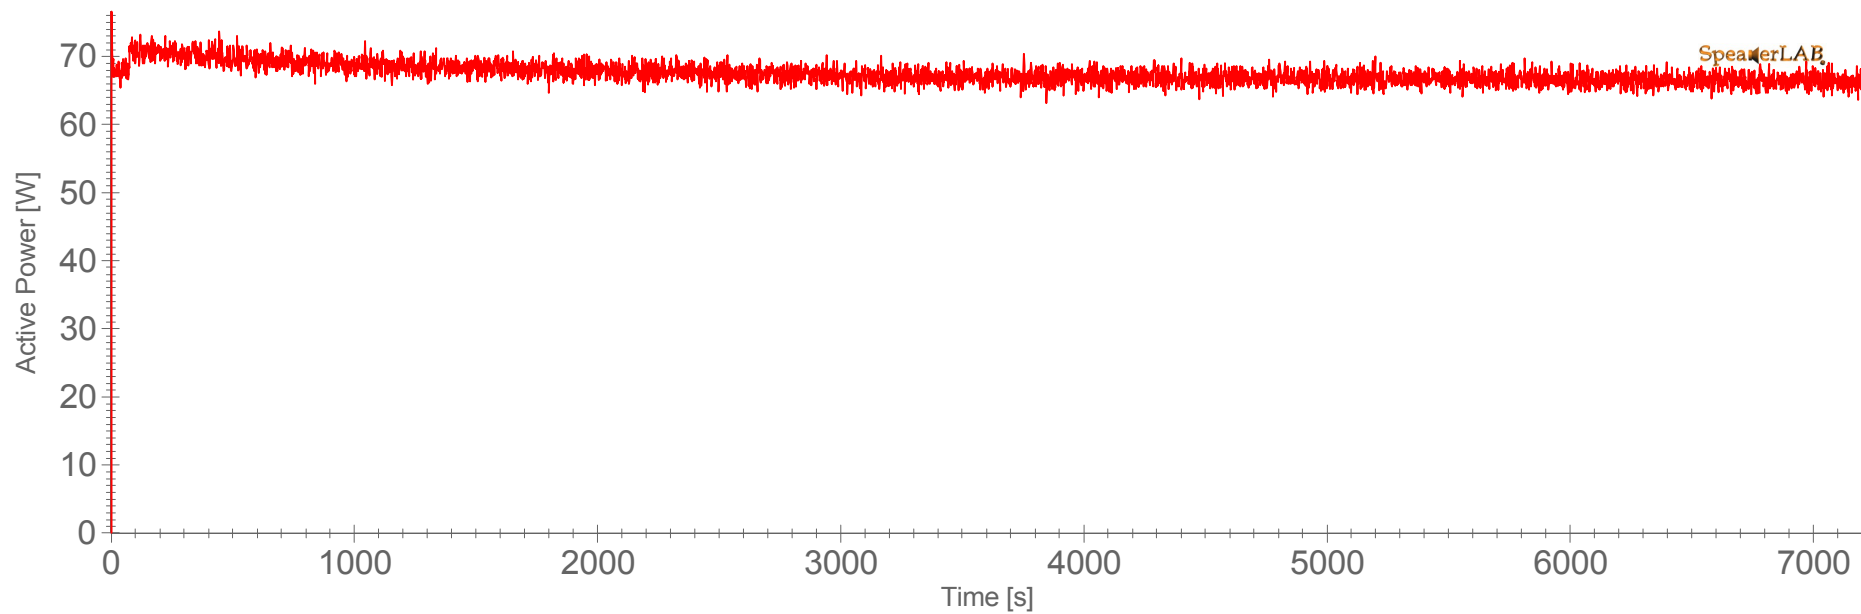

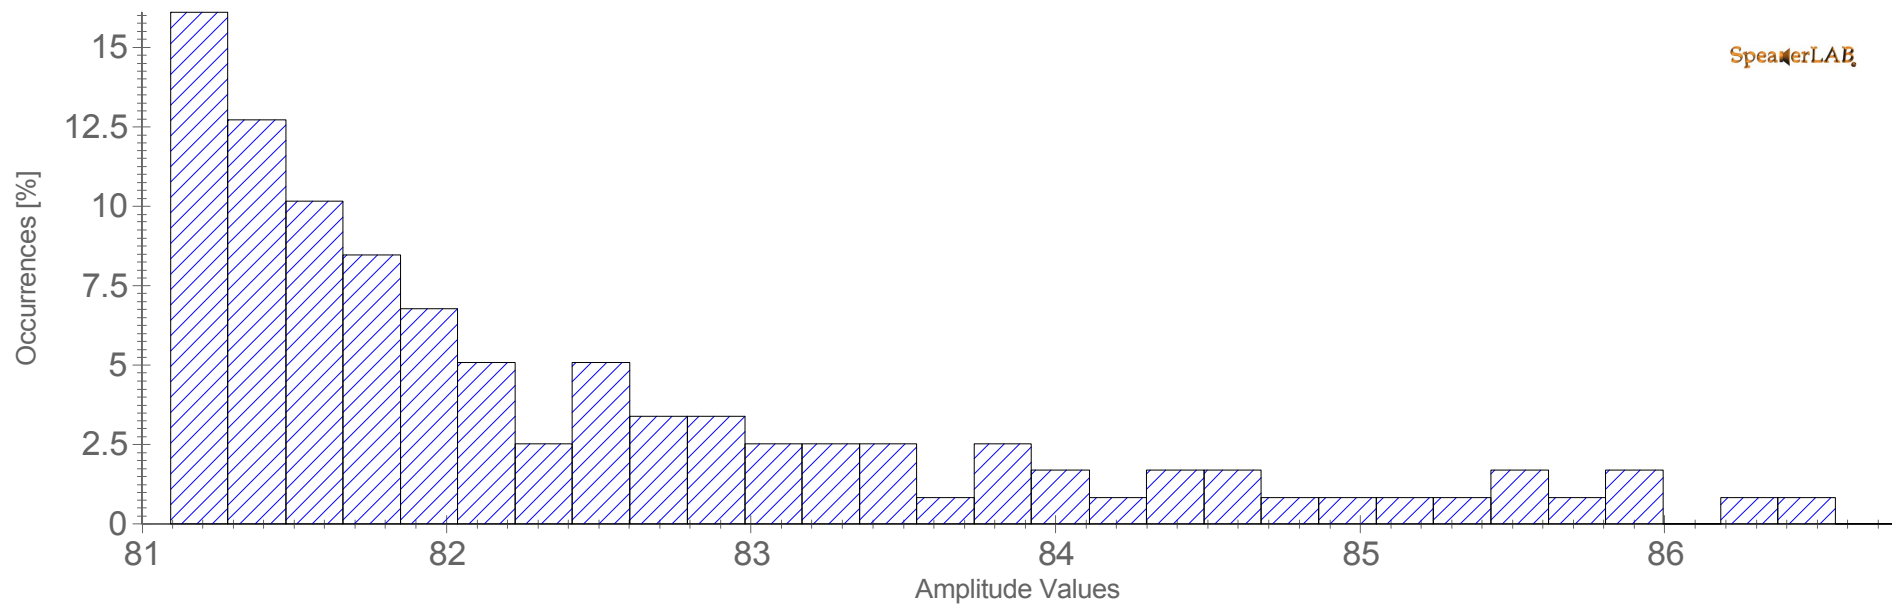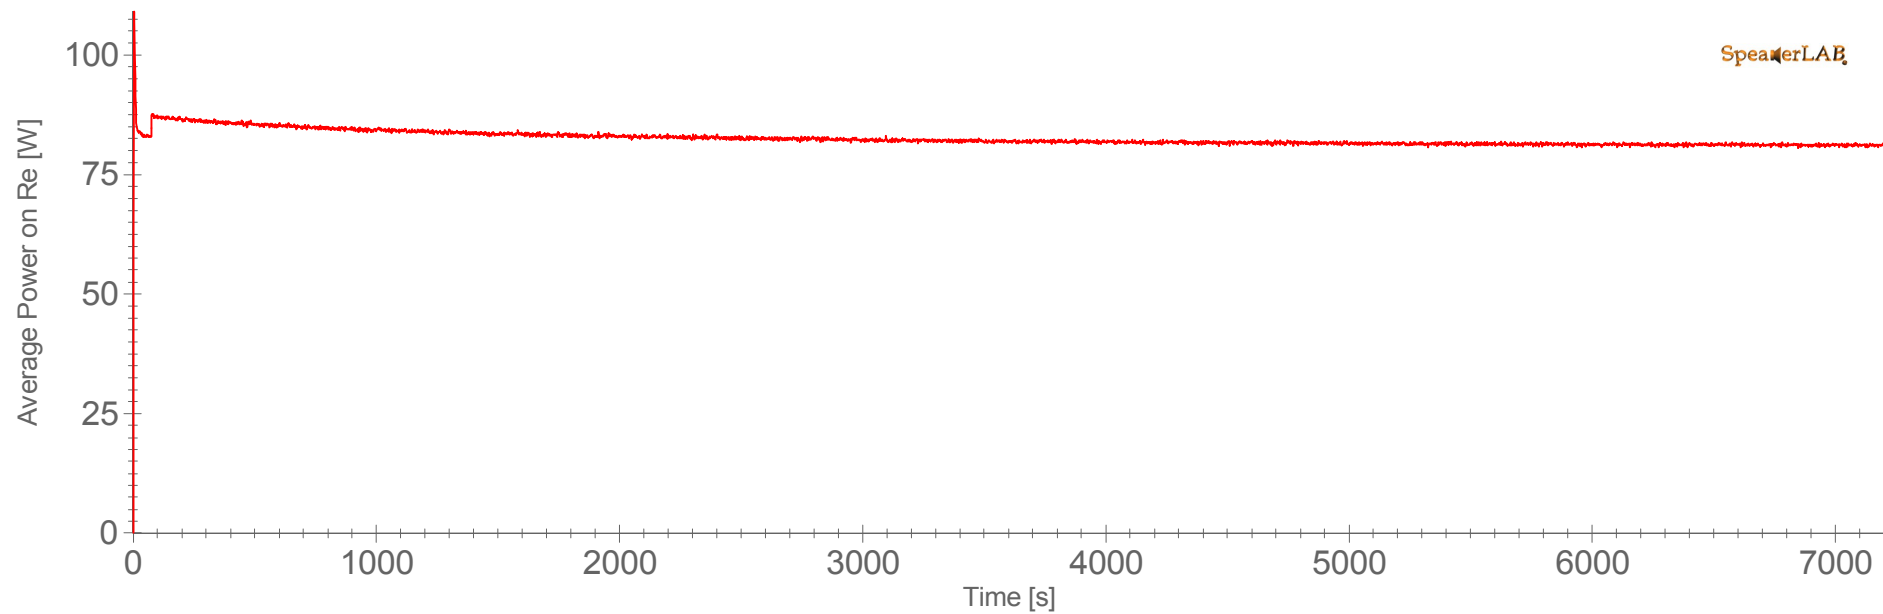

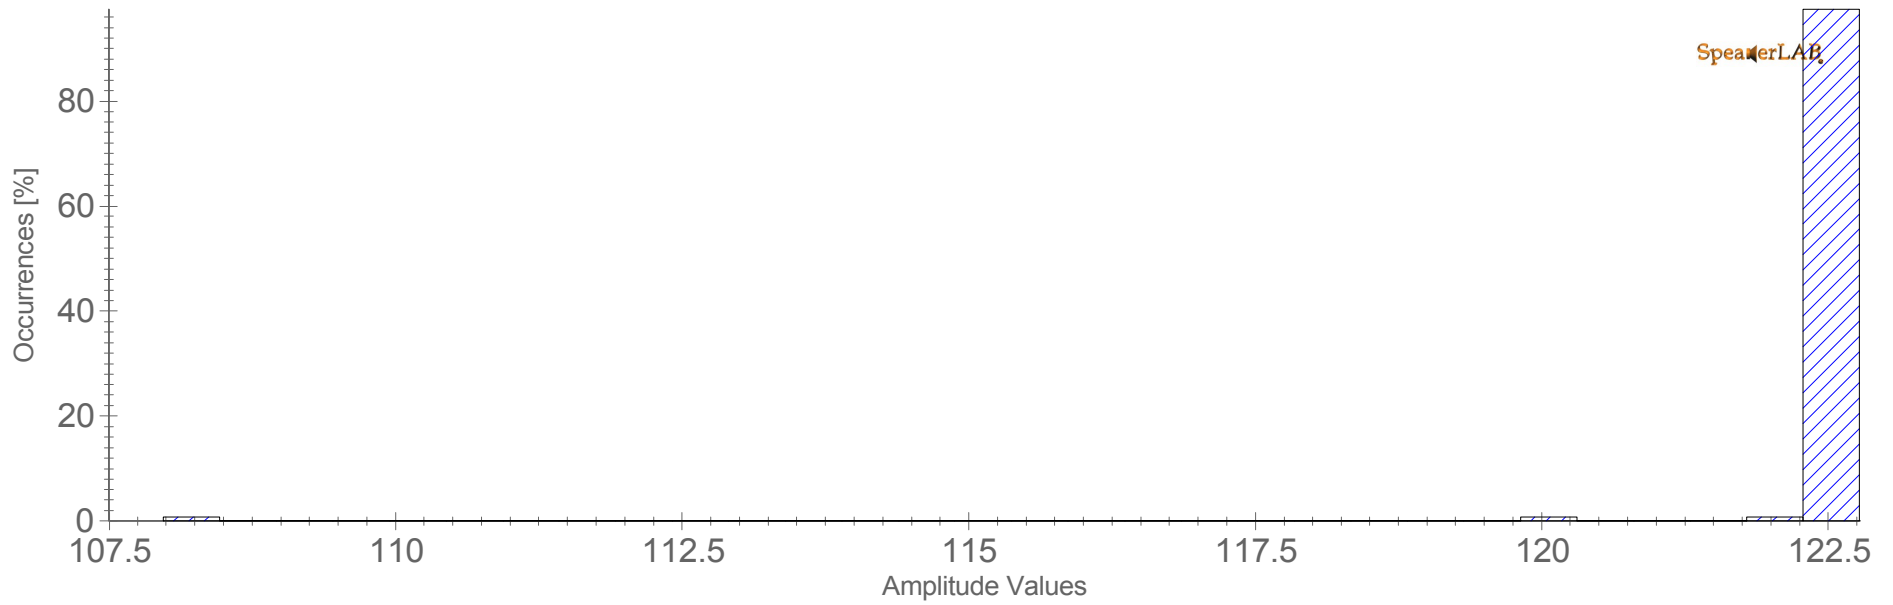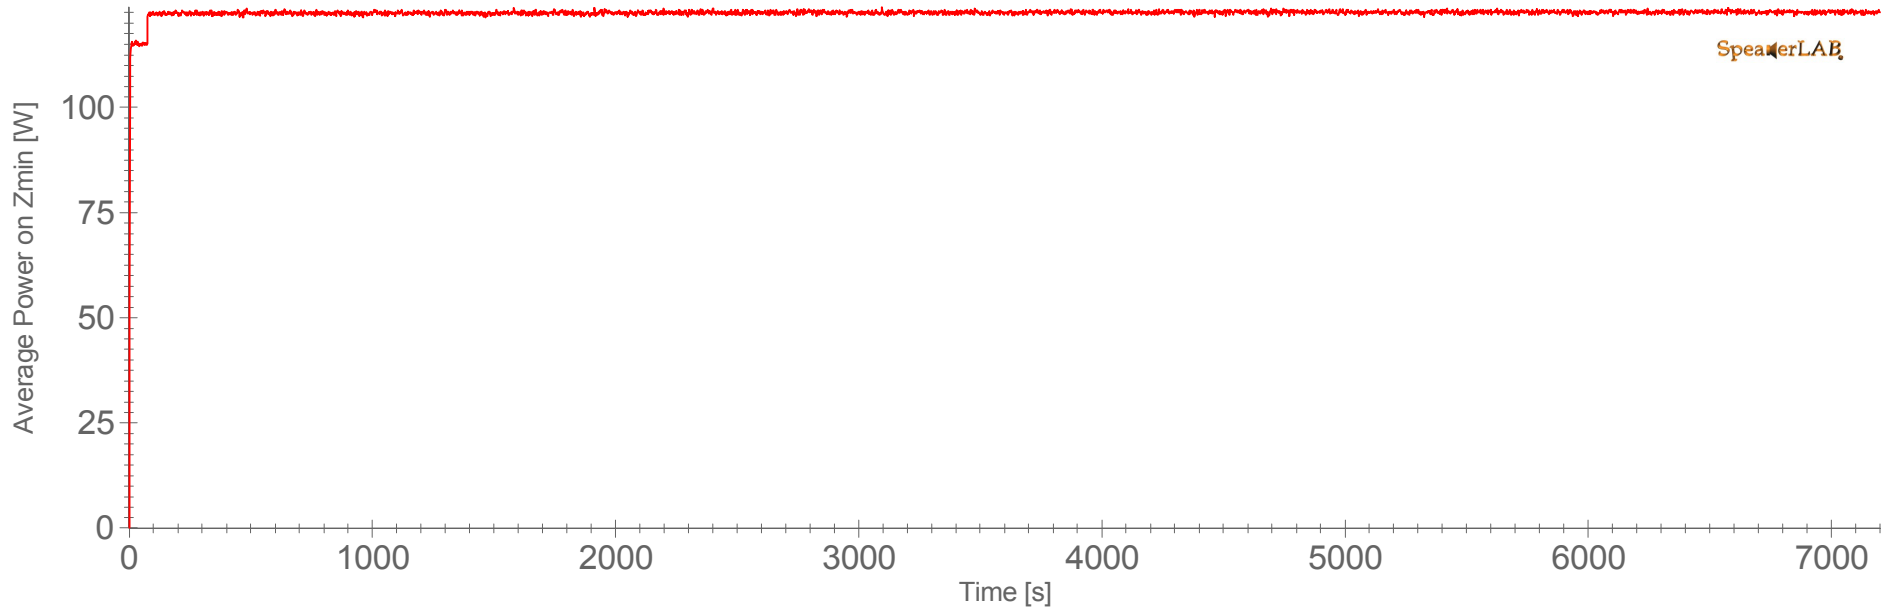

The End

CD721T



We design this document to reduce ink waste

Please consider the environment before printing this document (and don't print this page)