

SpeakerLAB Report

CD723T

Author: Cinanni

Saved: 29/11/2013 12.23.40

Printed: 25/02/2014 15.41.15



Summary



CD723T



Author	Cinanni
Re	5,392 Ohm
Zmin	6,900 Ohm
Signal type	Pink Noise
Signal application	Continuous
Normative	Custom
Vrms (time average)	NaN V
VC material	Aluminium
VC initial Temperature	7,173 degC
Initial Date and Time	29/11/2013 12.23.40
Final Date and Time	29/11/2013 14.23.41
Test duration	0 02:00:00
Limits	Limits disabled
Results	Final time reach. Test OK
HW Version	Lite







Printed: 25/02/2014 15.41.21

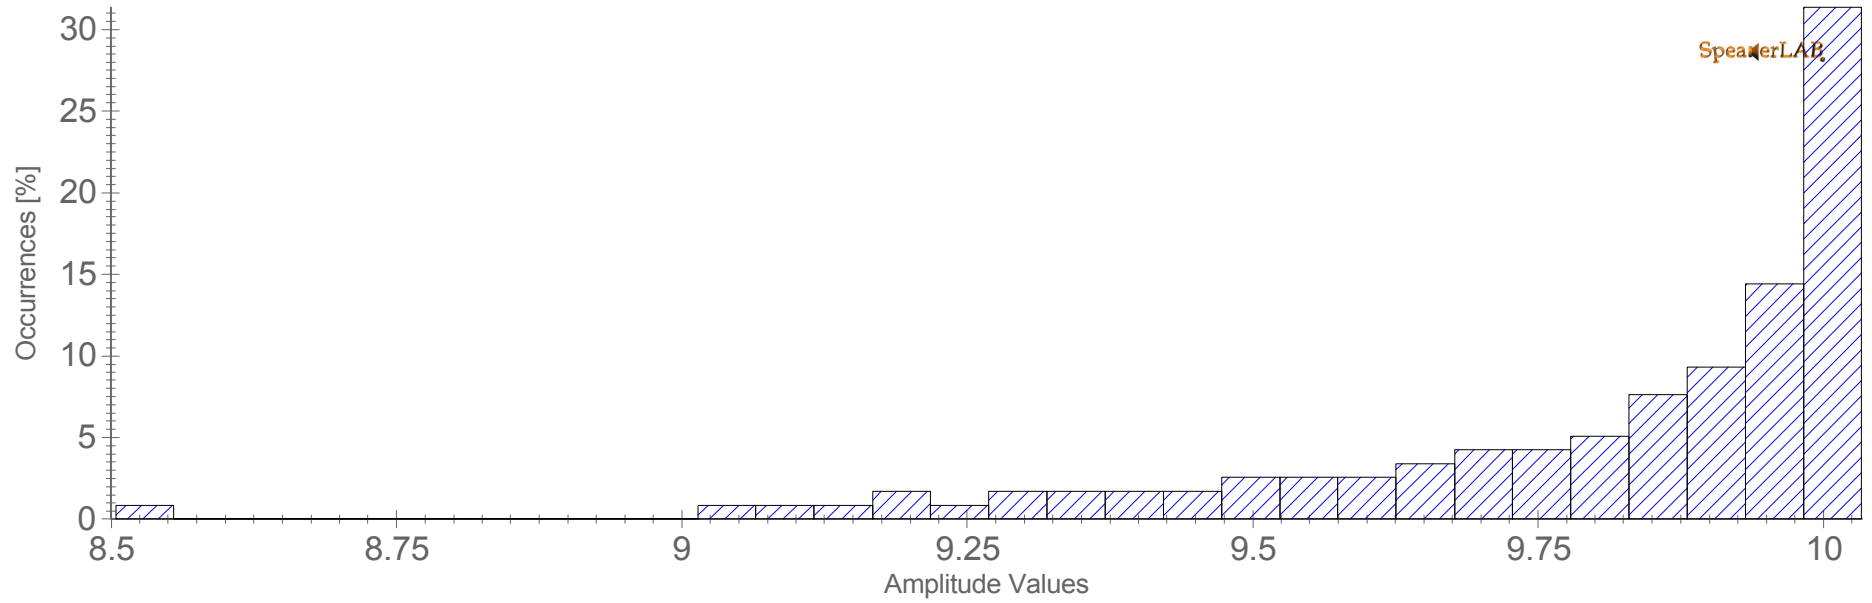
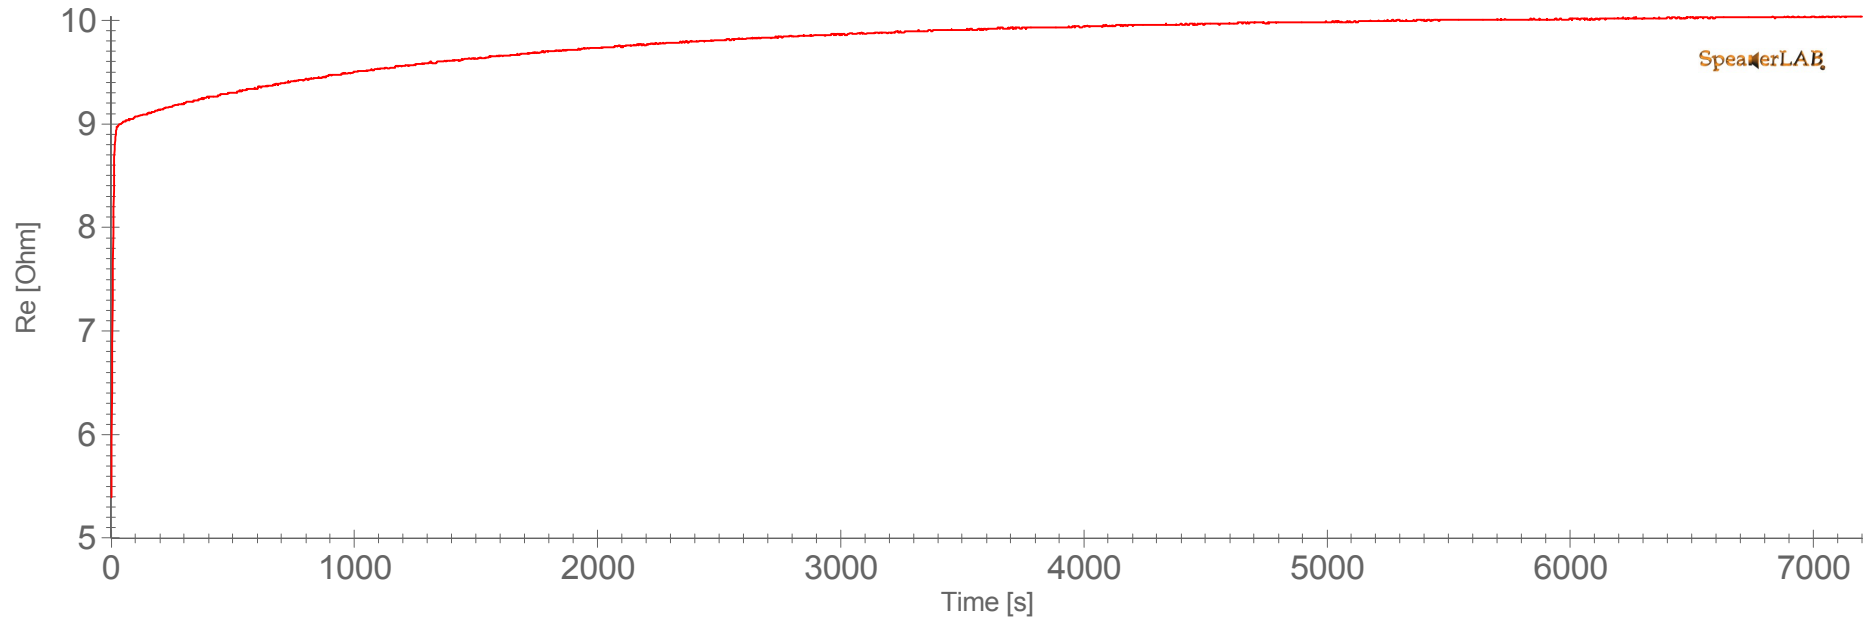


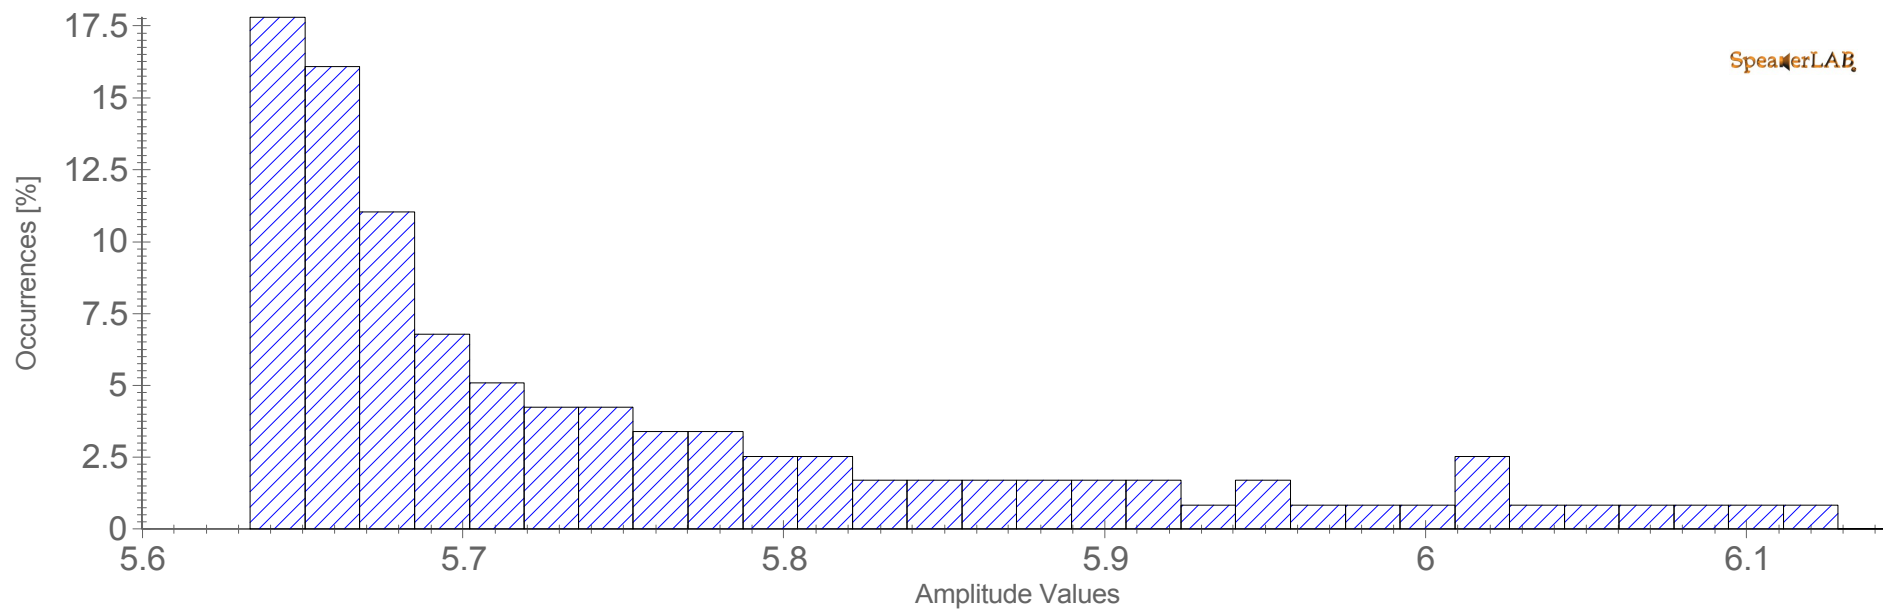
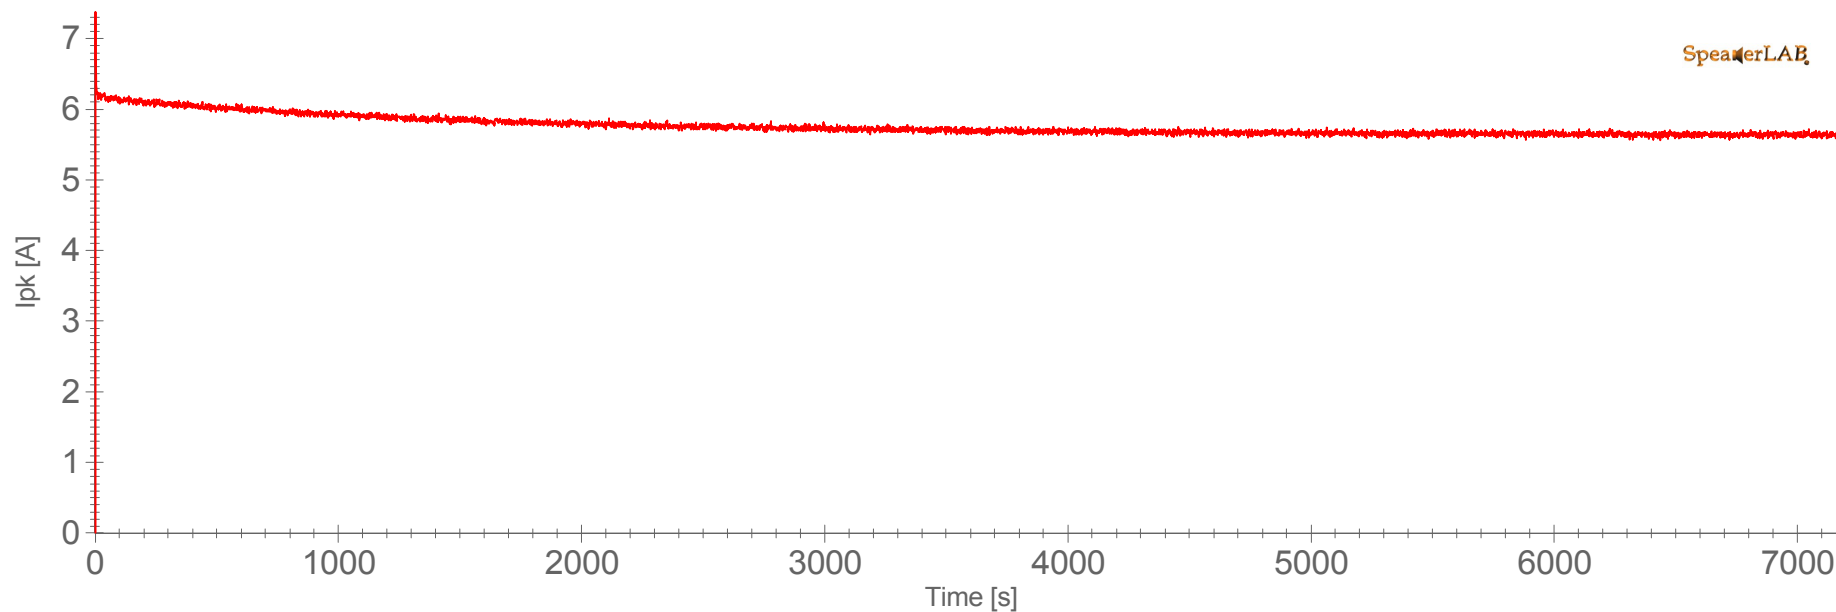


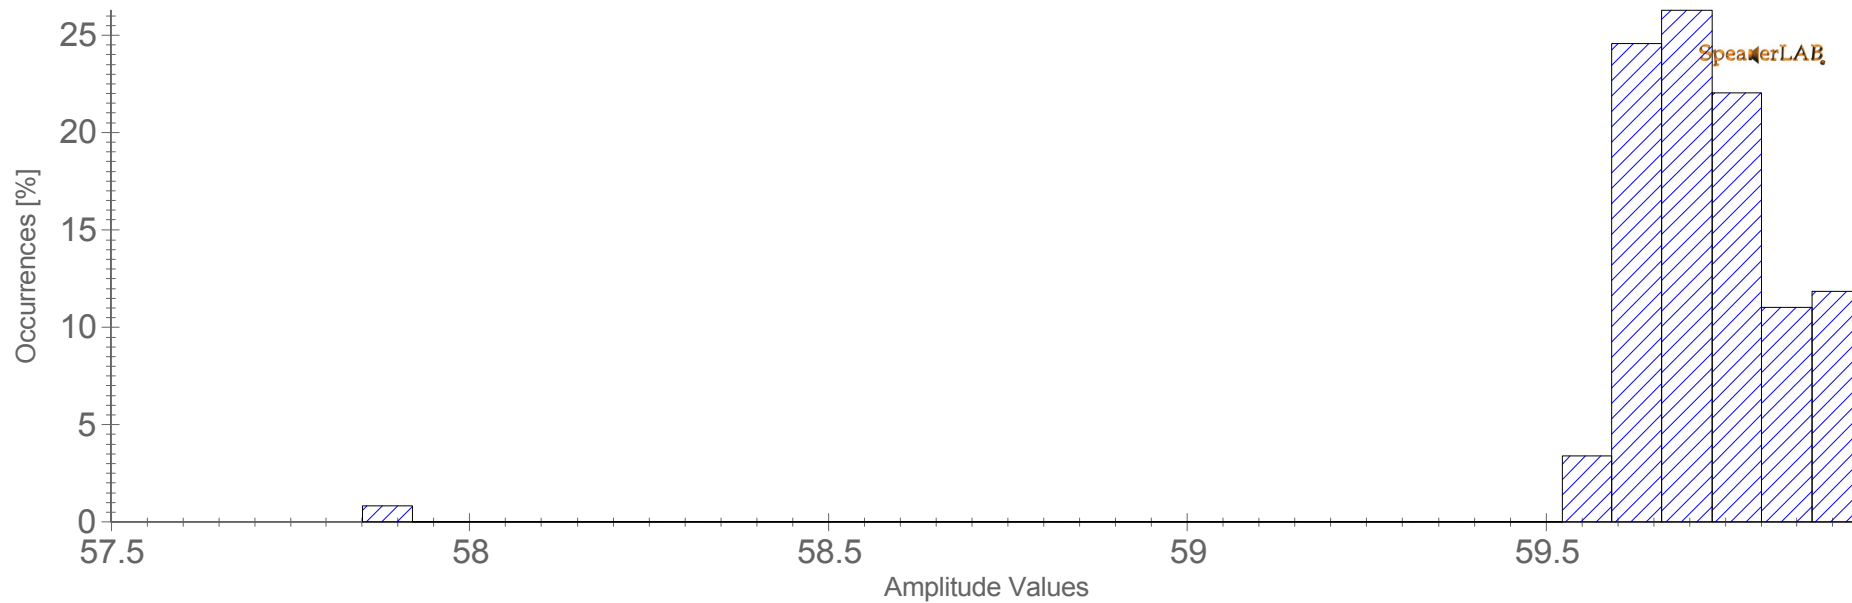
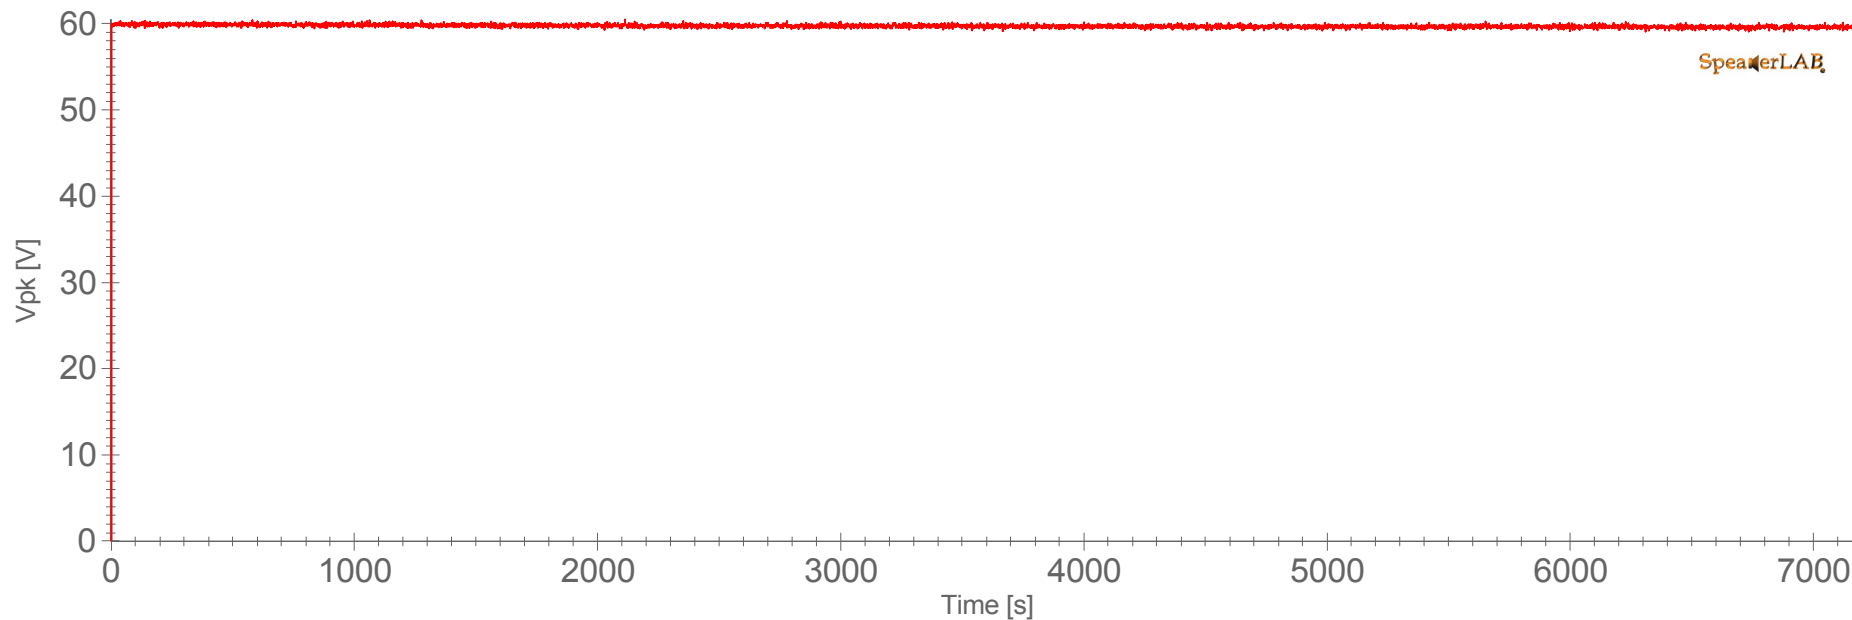


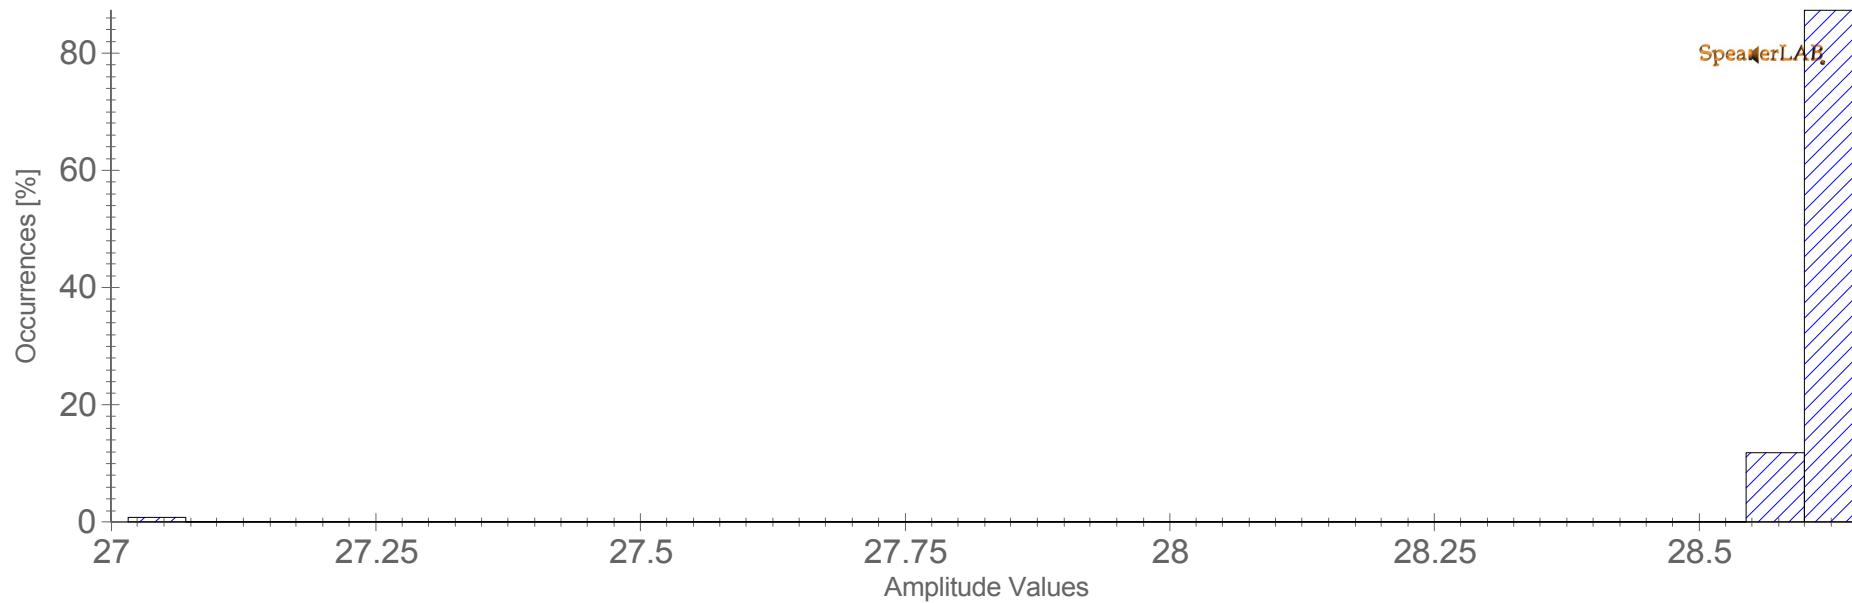
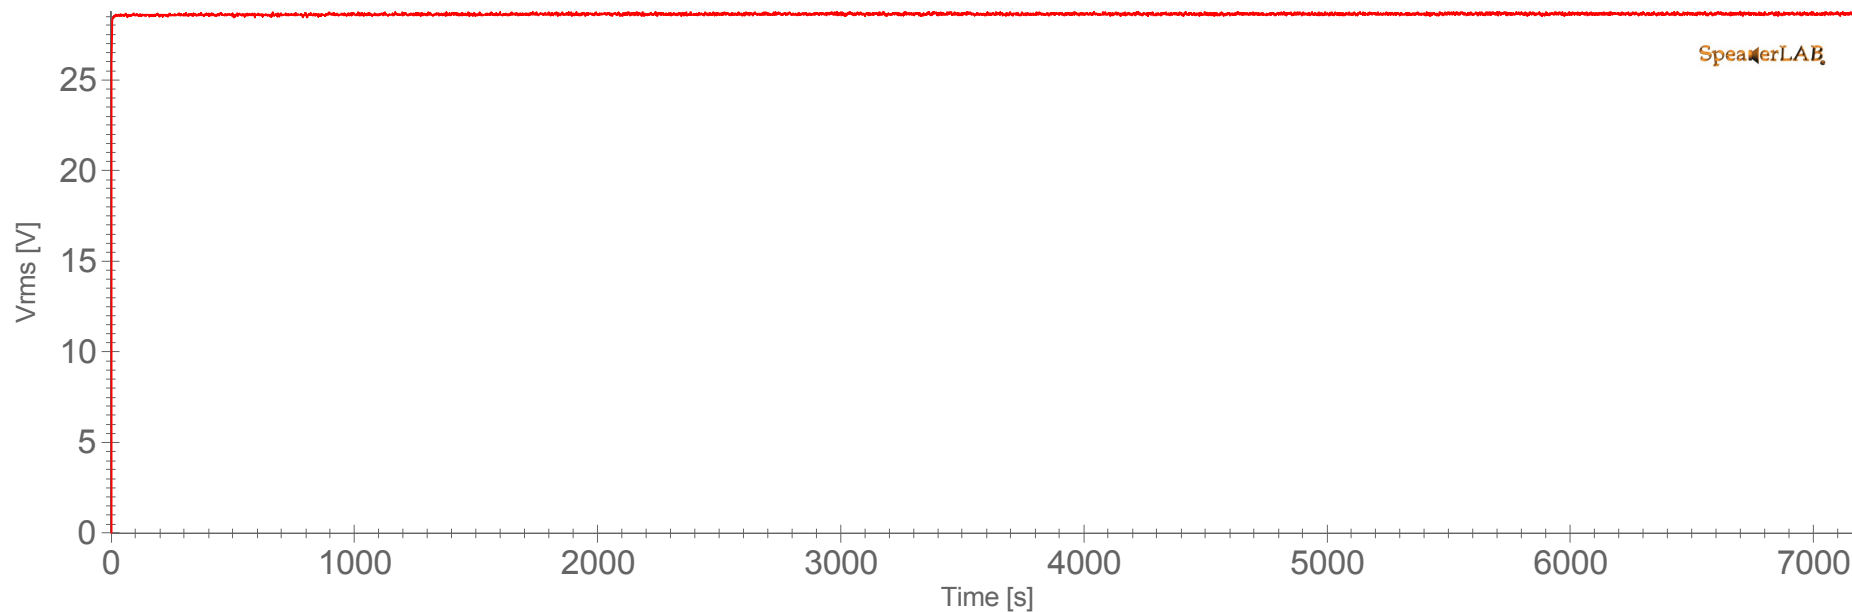


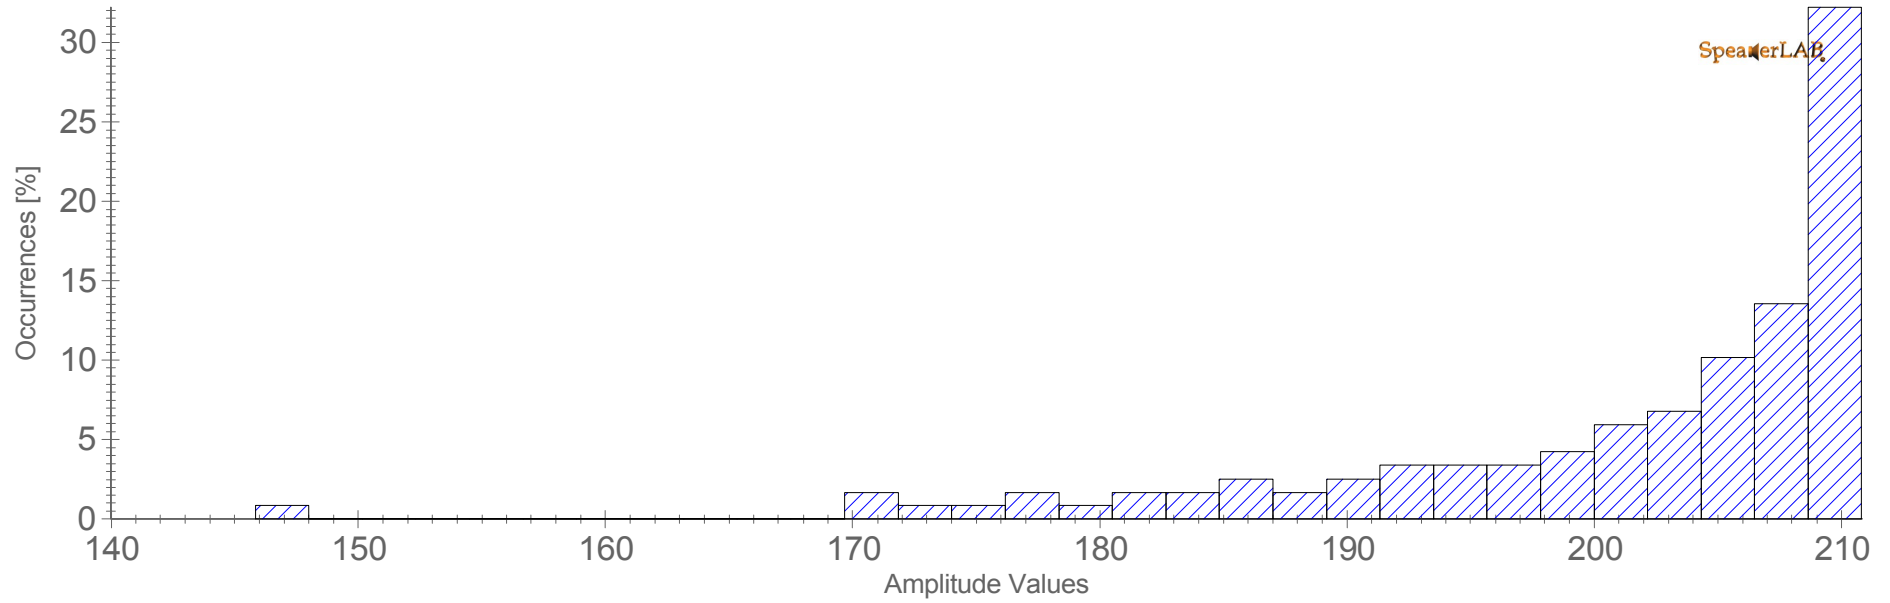
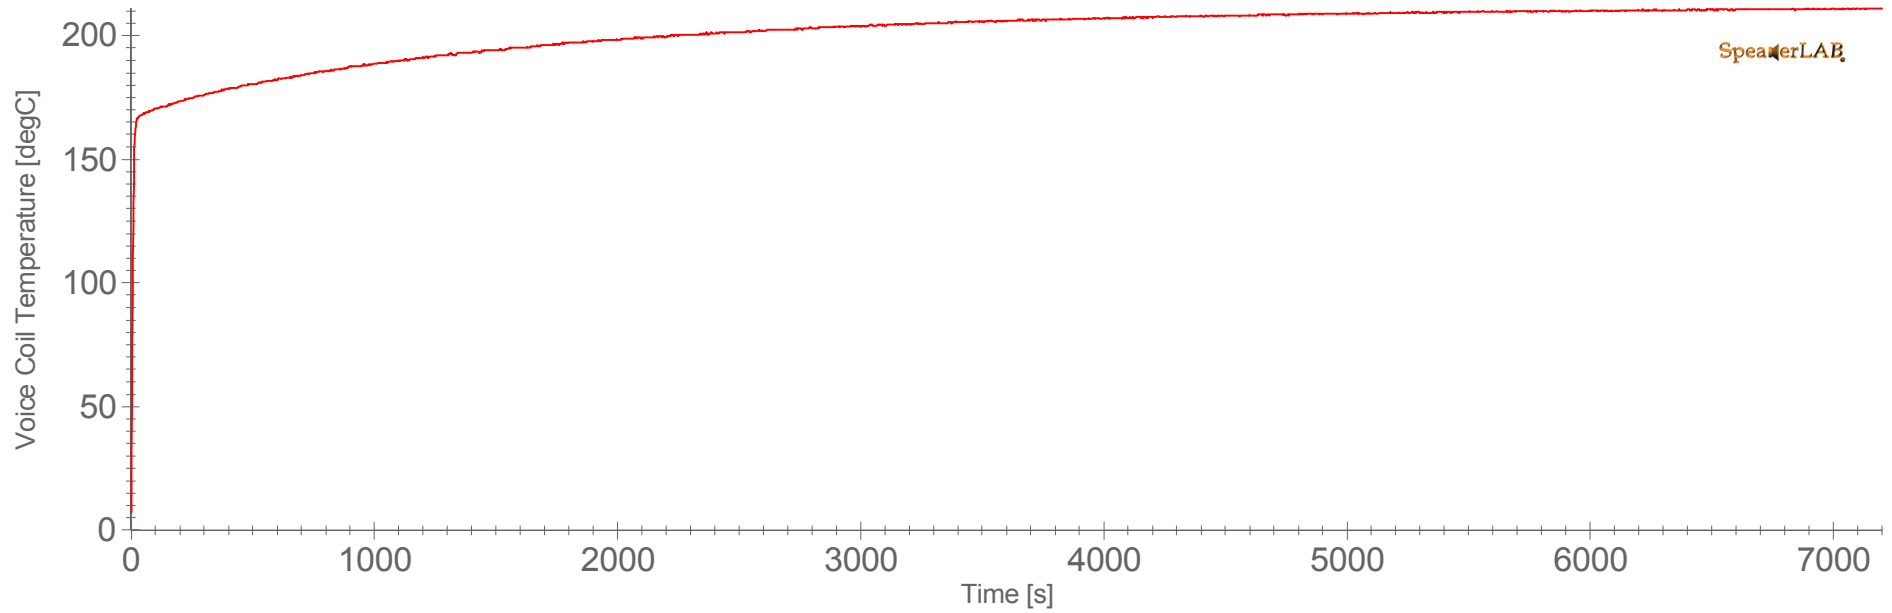


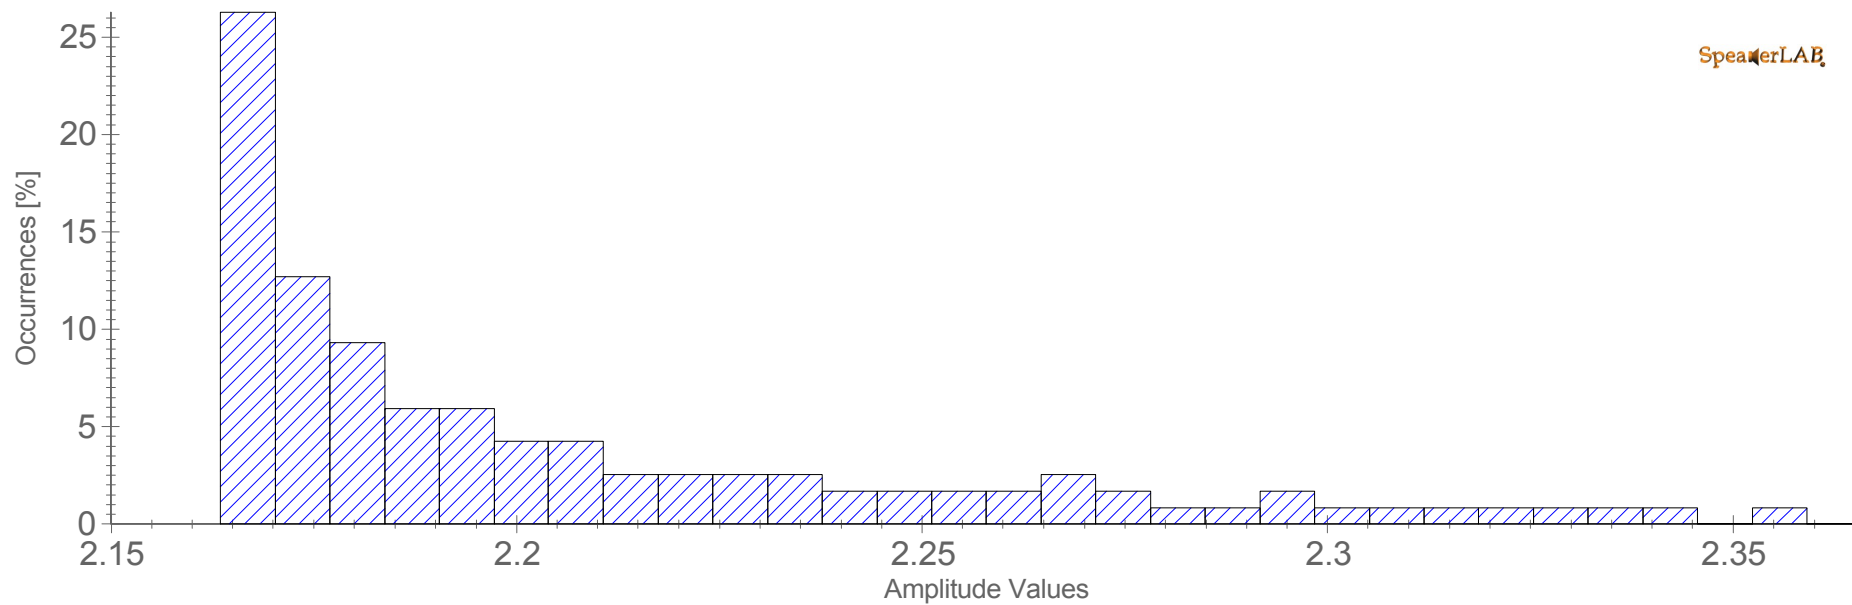
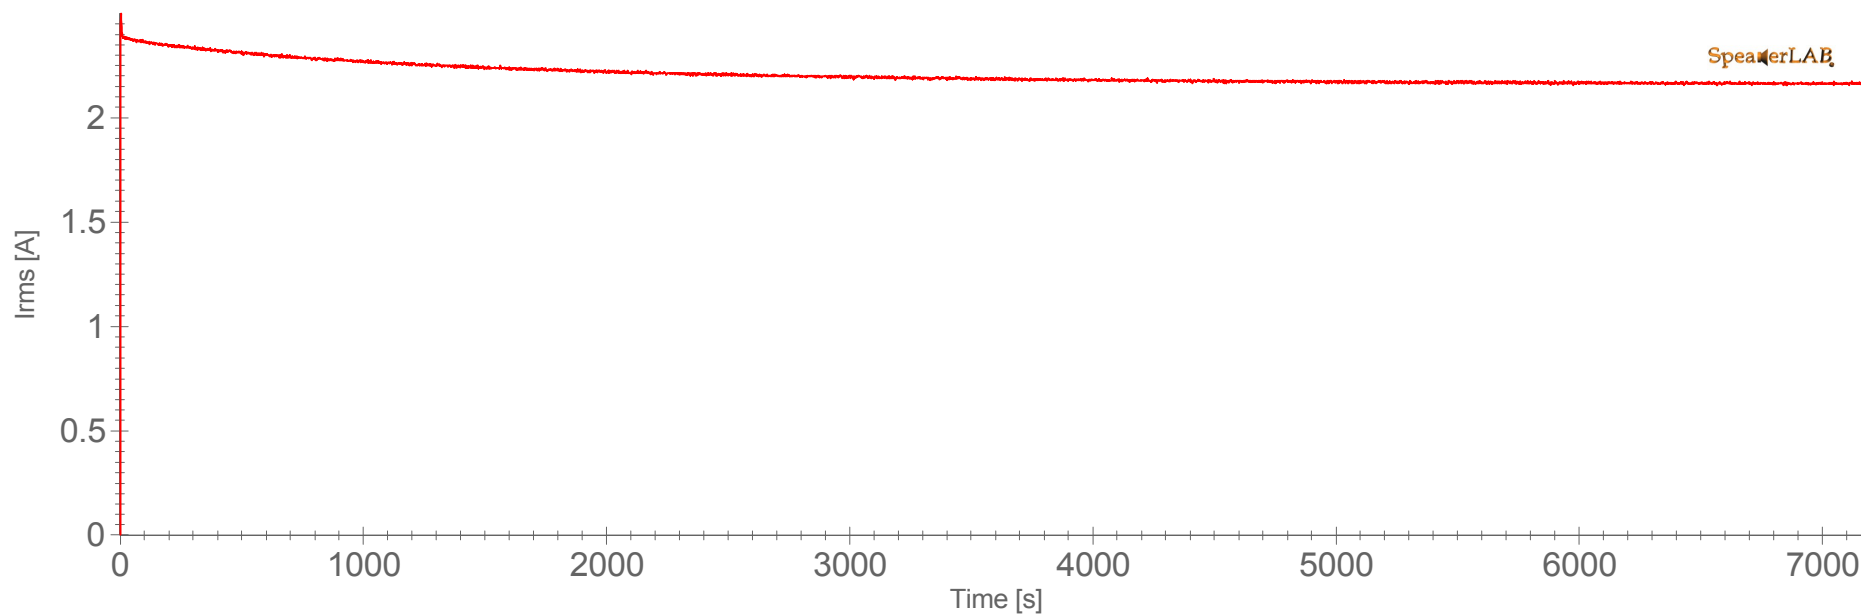


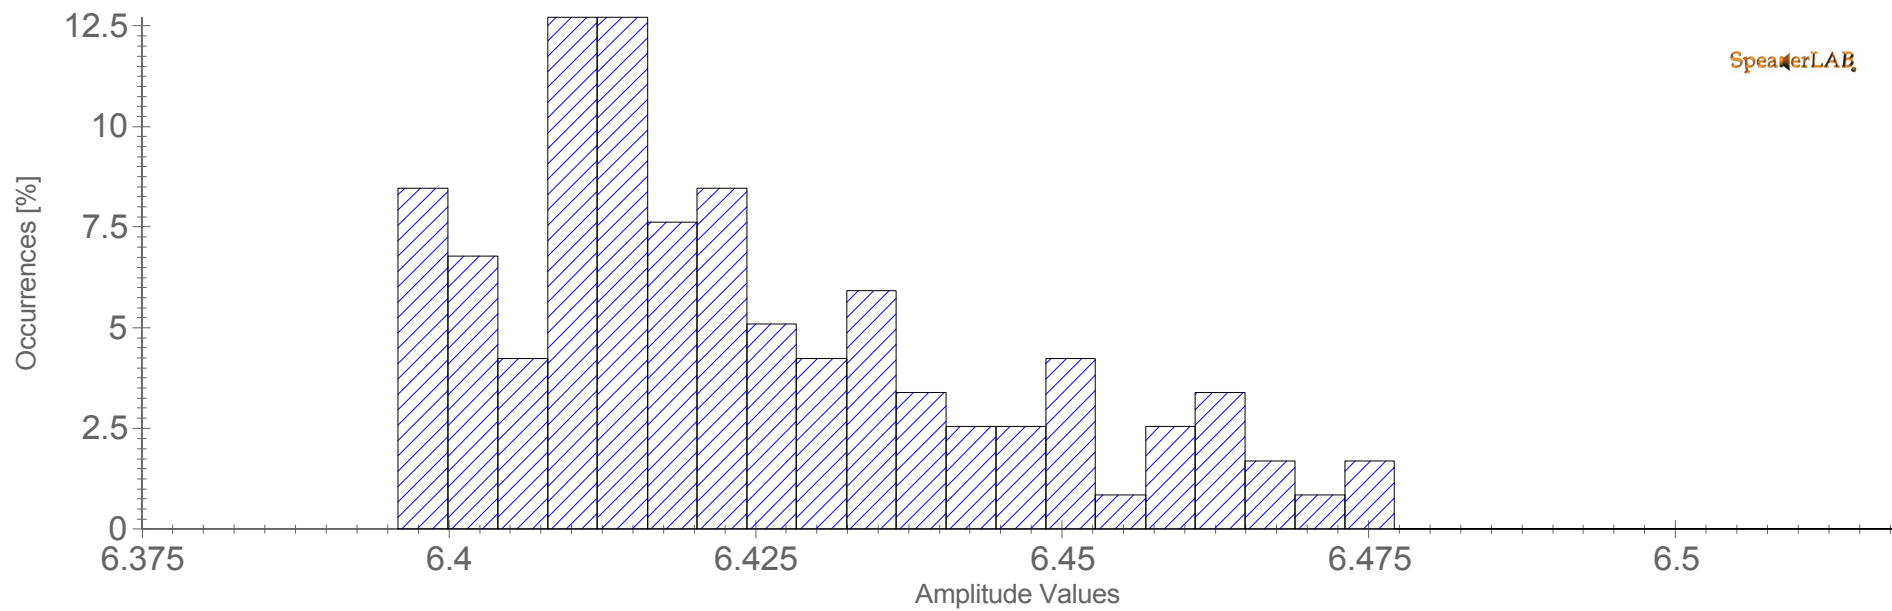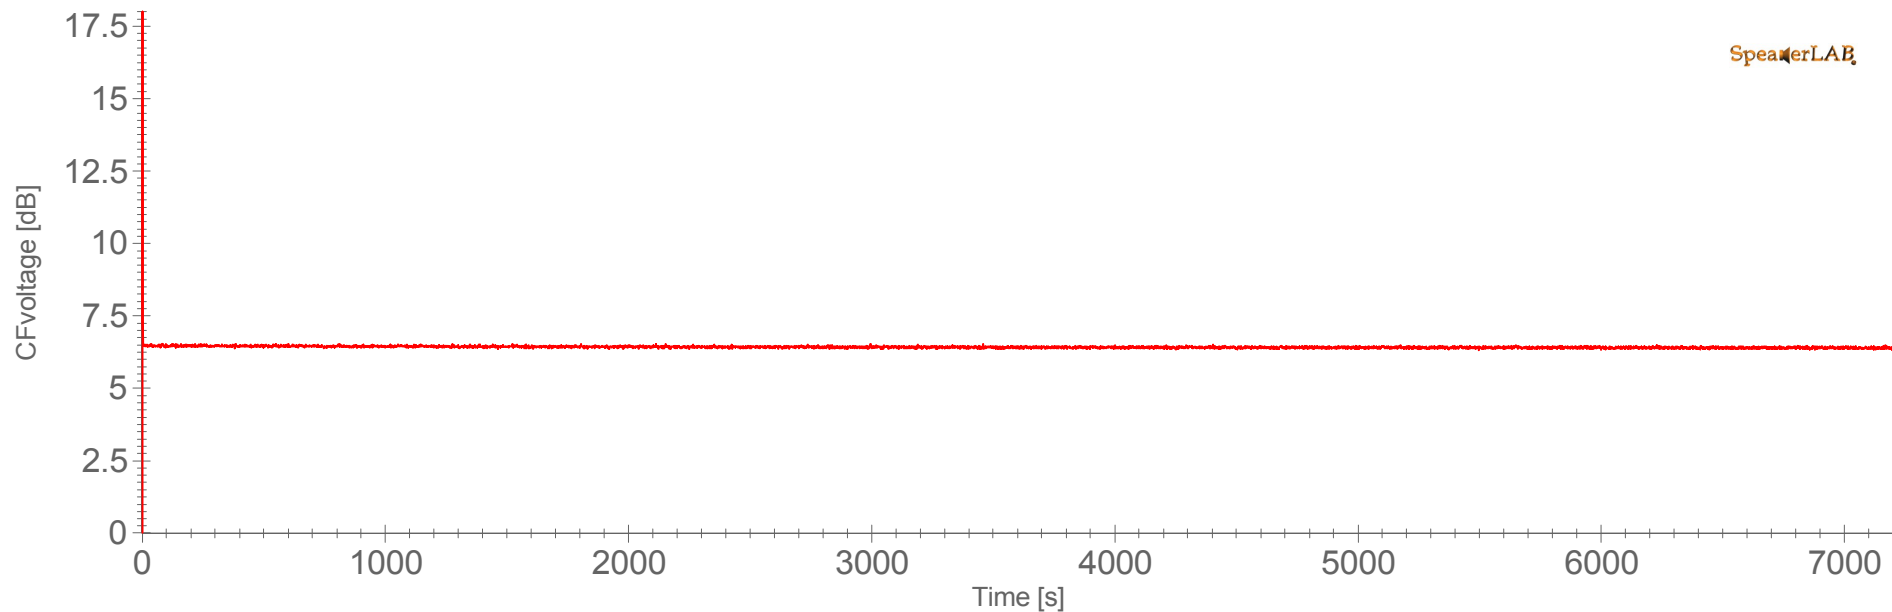

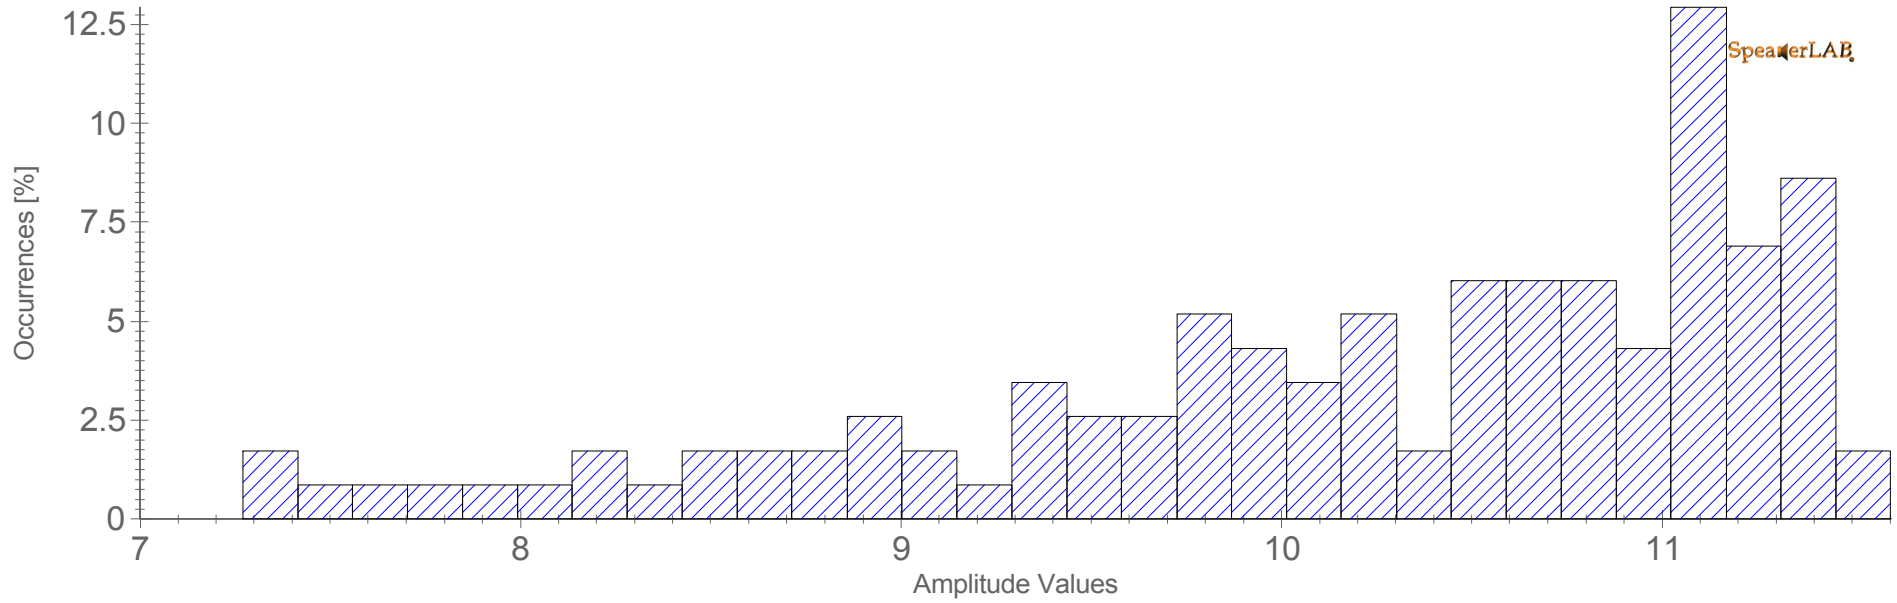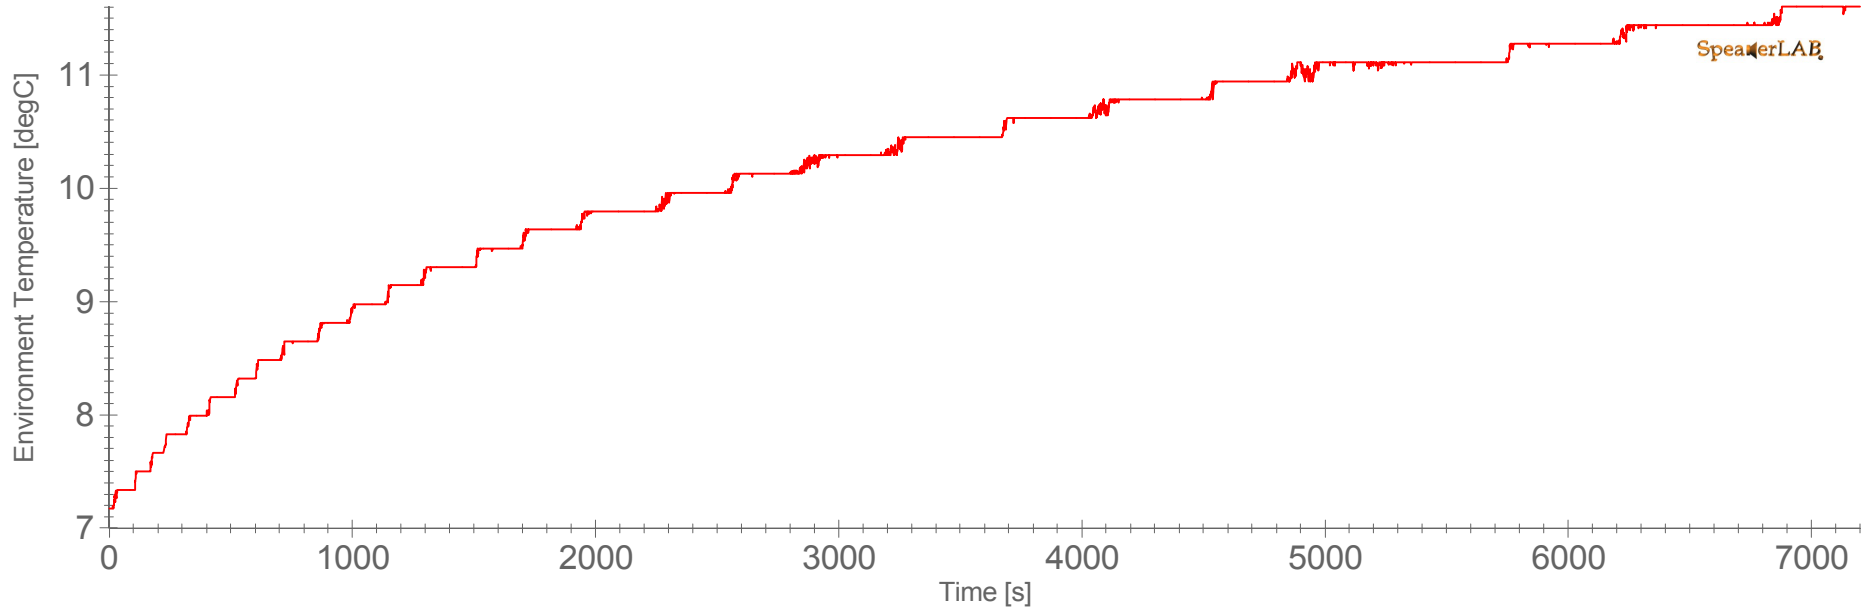

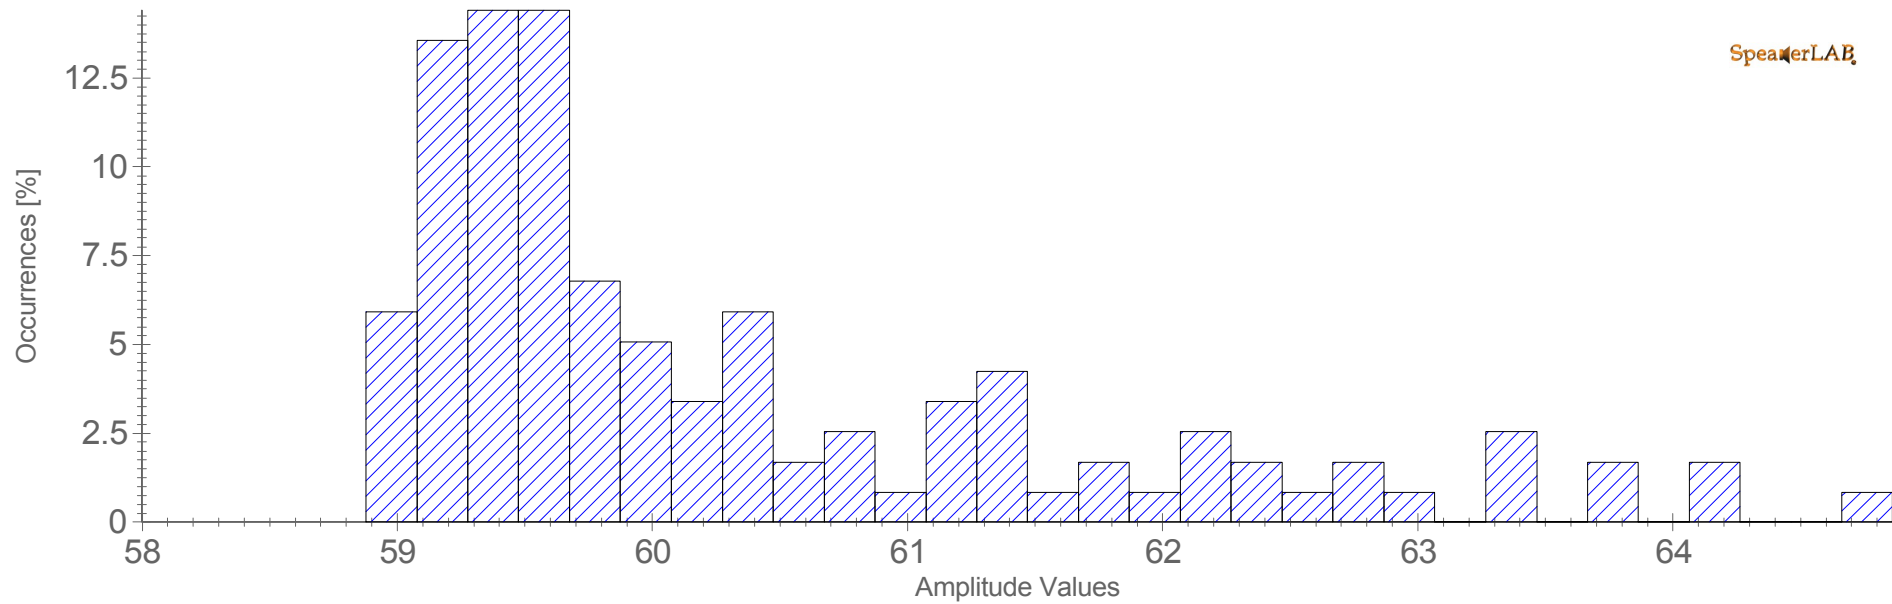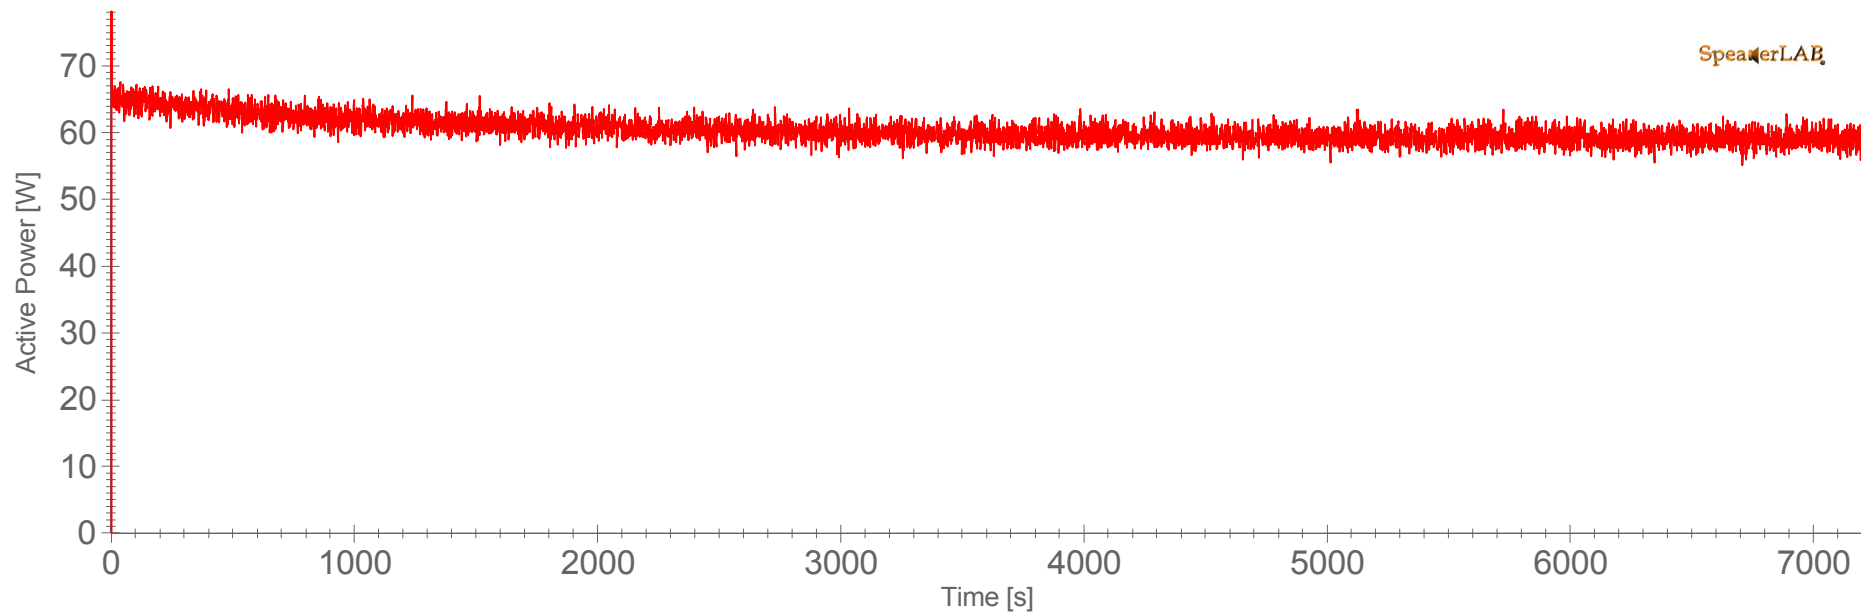

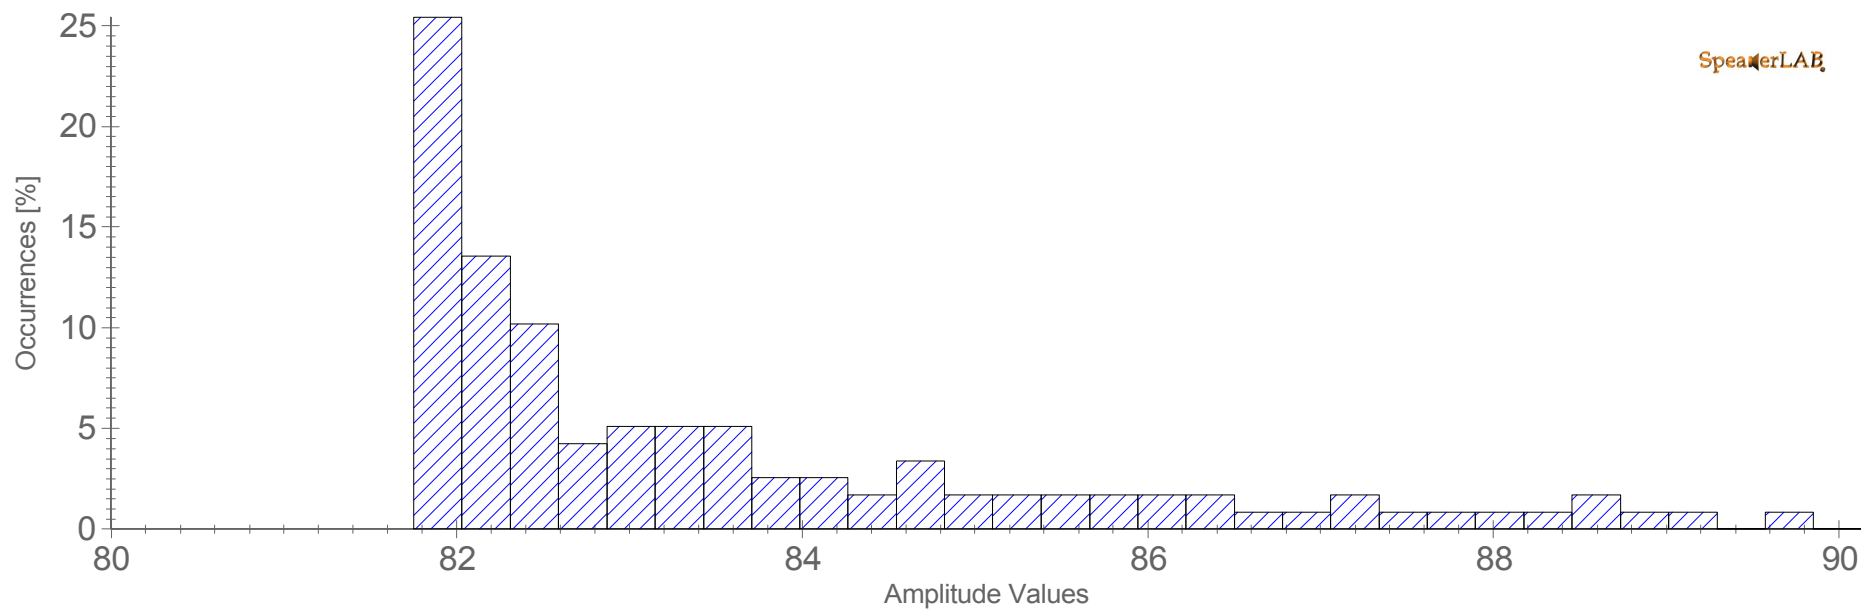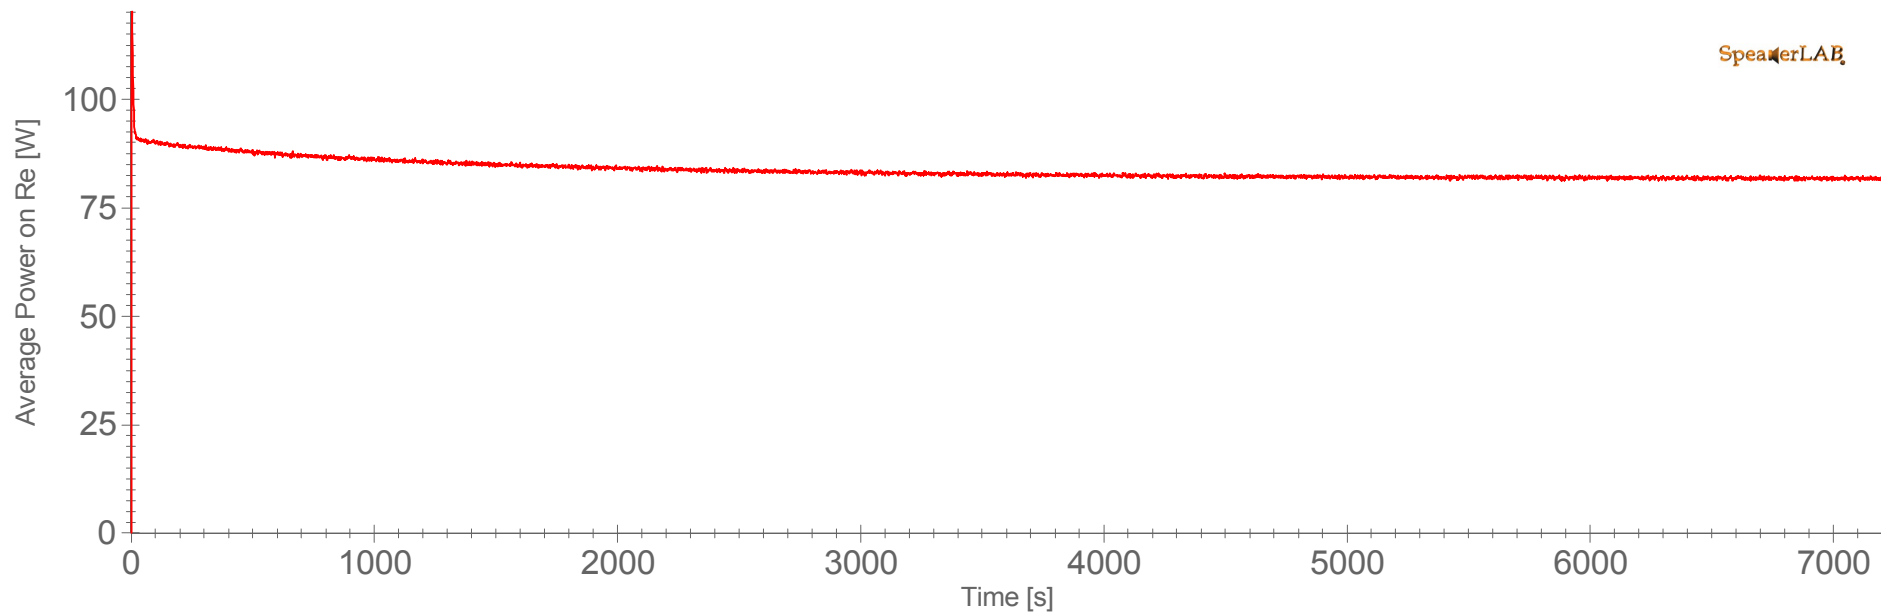

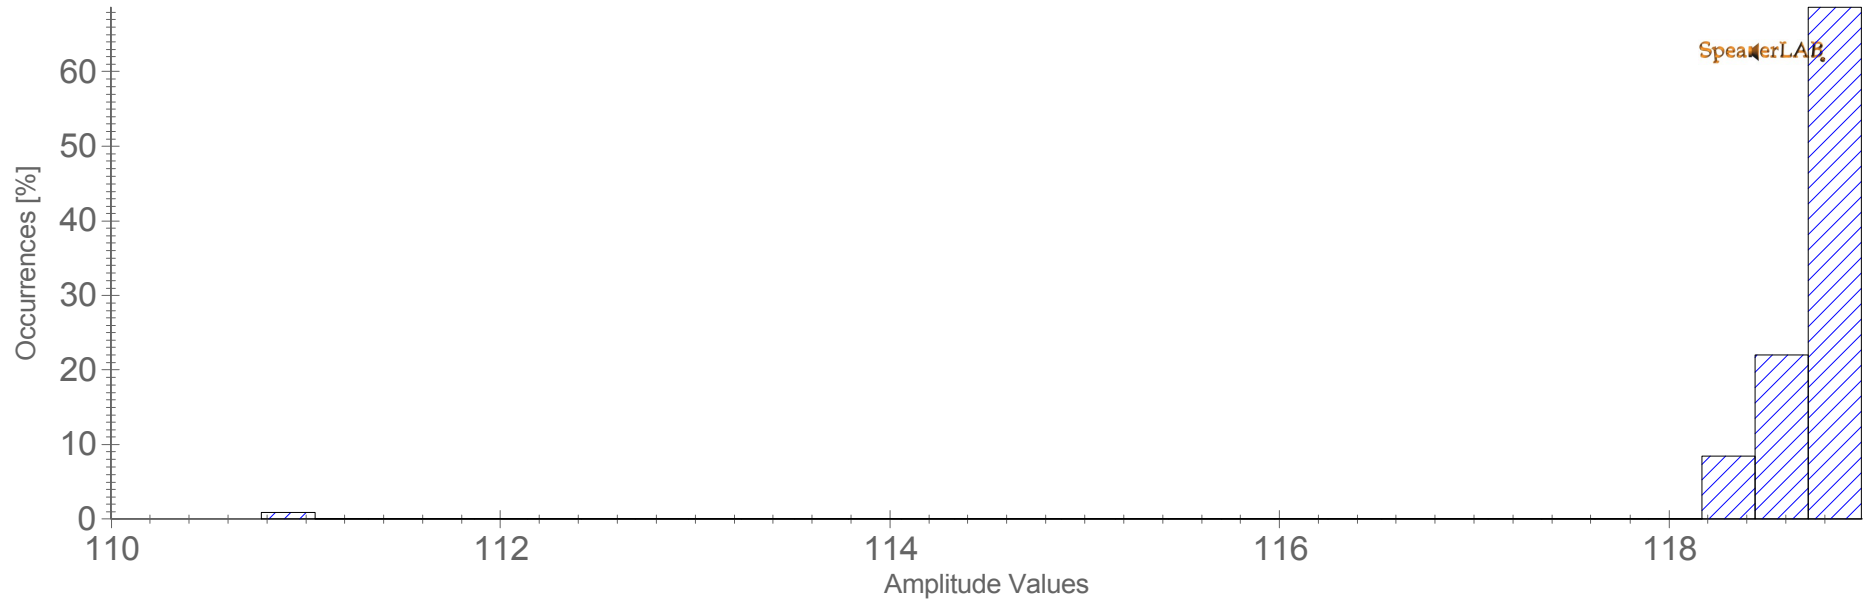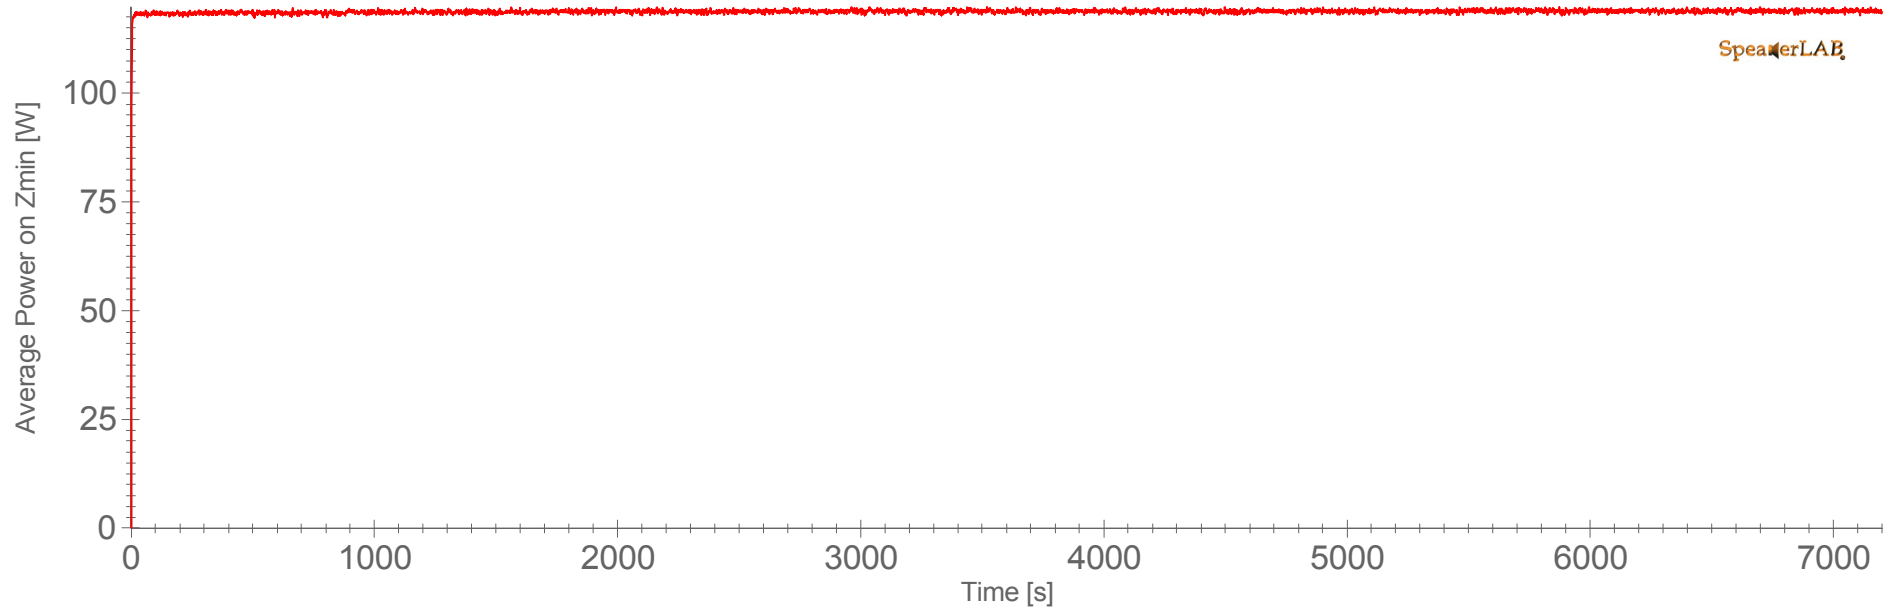

The End

CD723T



We design this document to reduce ink waste

Please consider the environment before printing this document (and don't print this page)