

SpeakerLAB Report

CD 1003T

Author: Cinanni

Saved: 23/05/2014 15.04.07

Printed: 26/05/2014 10.07.51



Summary



CD 1003T



Author	Cinanni
Re	5,651 Ohm
Zmin	7,300 Ohm
Signal type	Pink Noise - Filter Type: HP 800 Hz/12 dB/Oct
Signal application	Continuous
Normative	Custom
Vrms (time average)	31,920 V
VC material	Aluminium
VC initial Temperature	19,638 degC
Initial Date and Time	23/05/2014 15.04.07
Final Date and Time	23/05/2014 17.04.09
Test duration	0 02:00:00
Limits	Limits disabled
Results	Final time reach. Test OK
HW Version	Lite







Printed: 26/05/2014 10.08.15

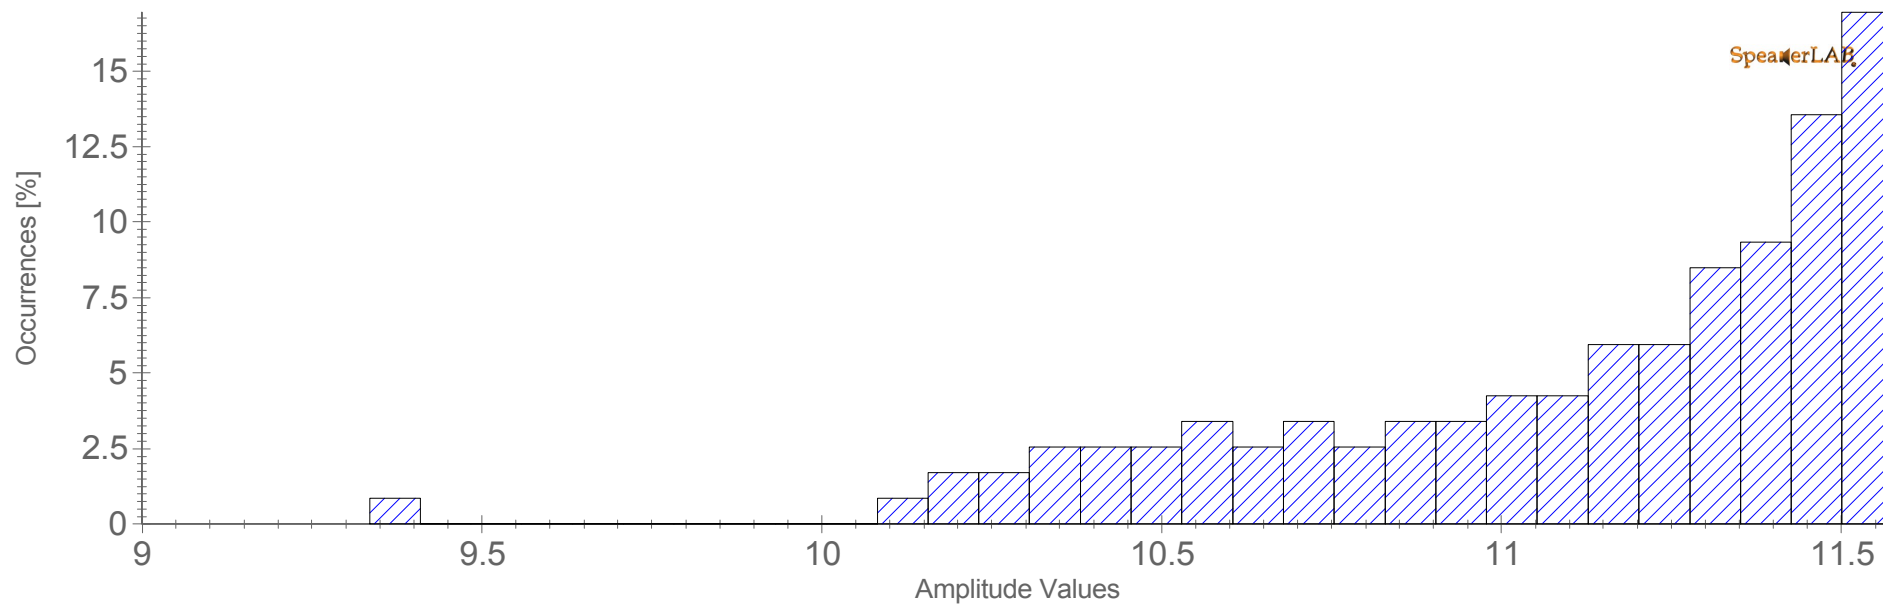
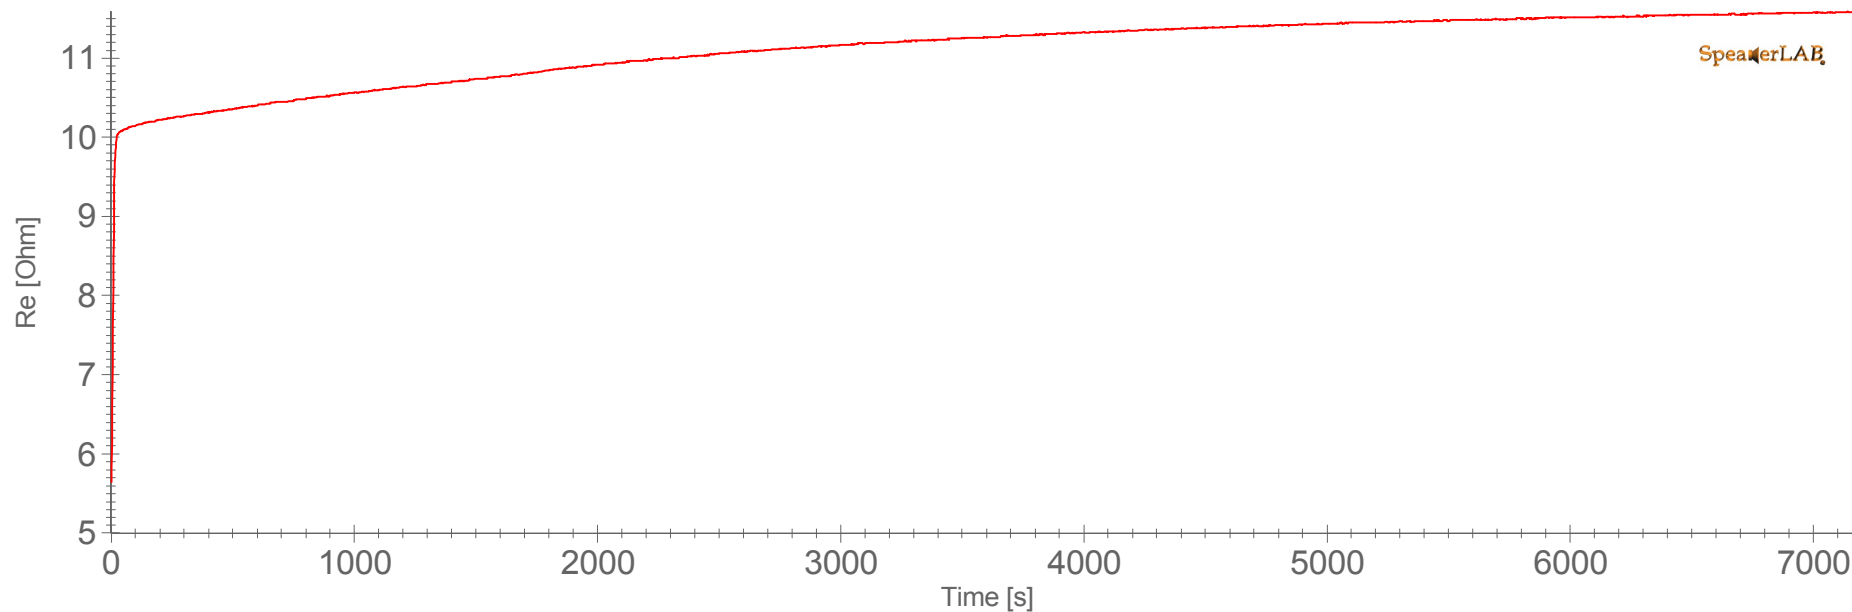


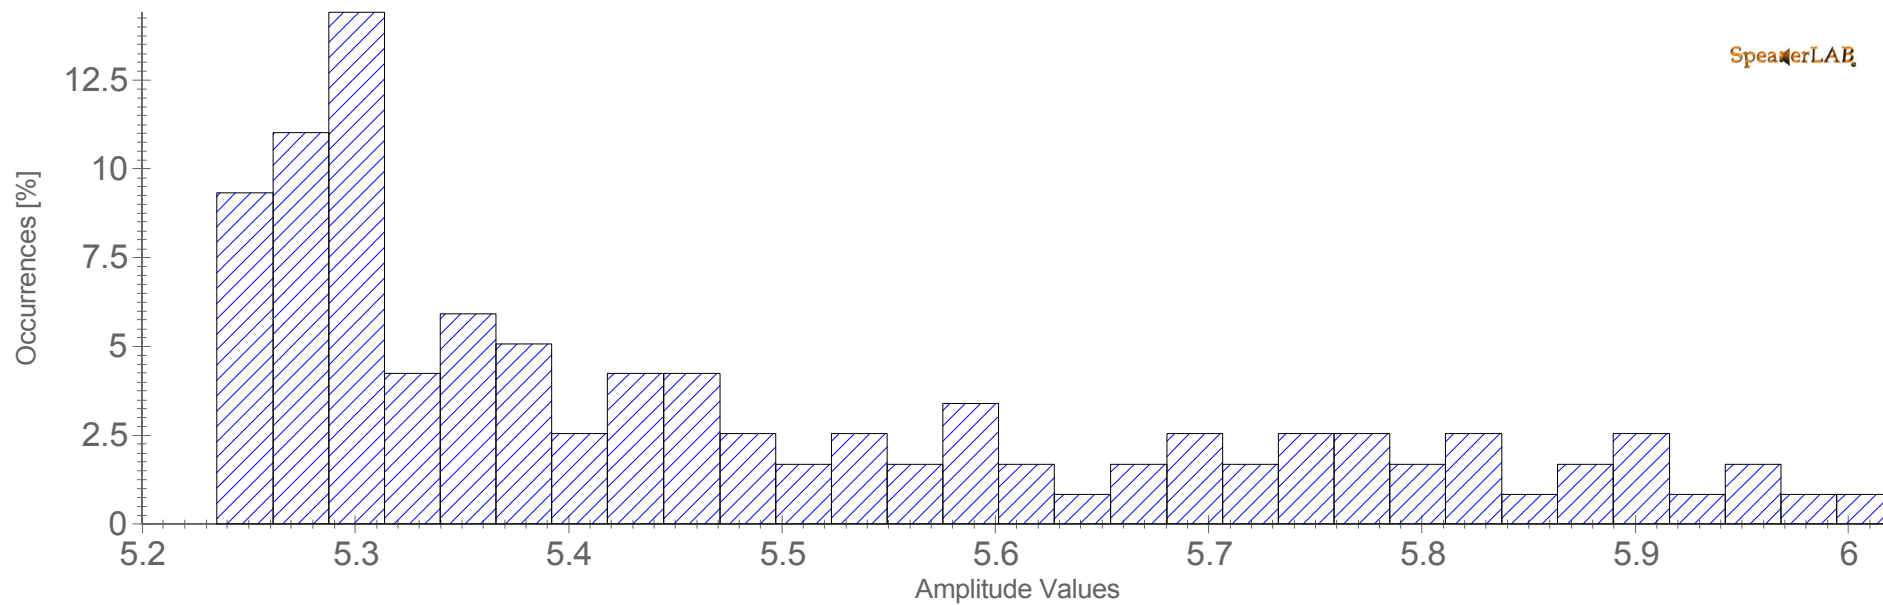
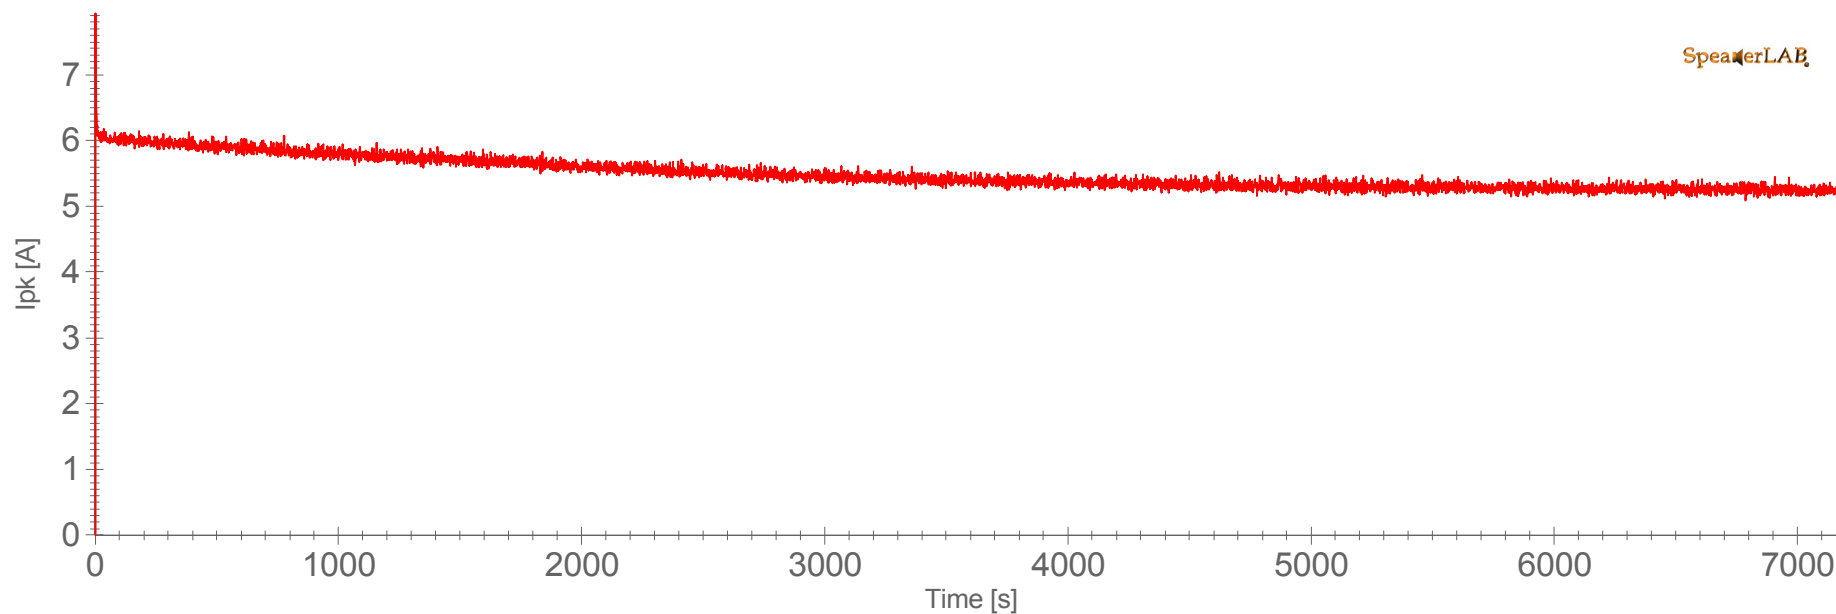


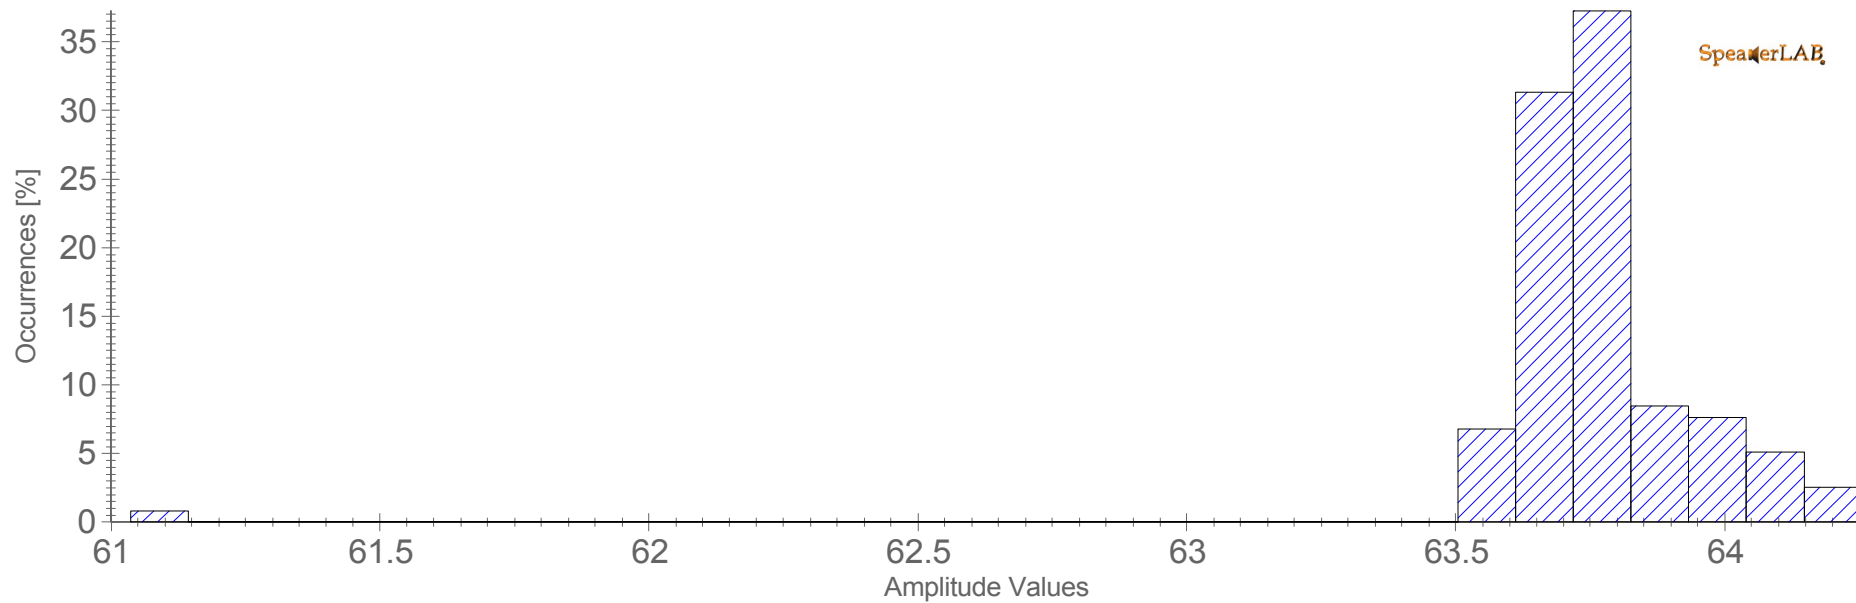
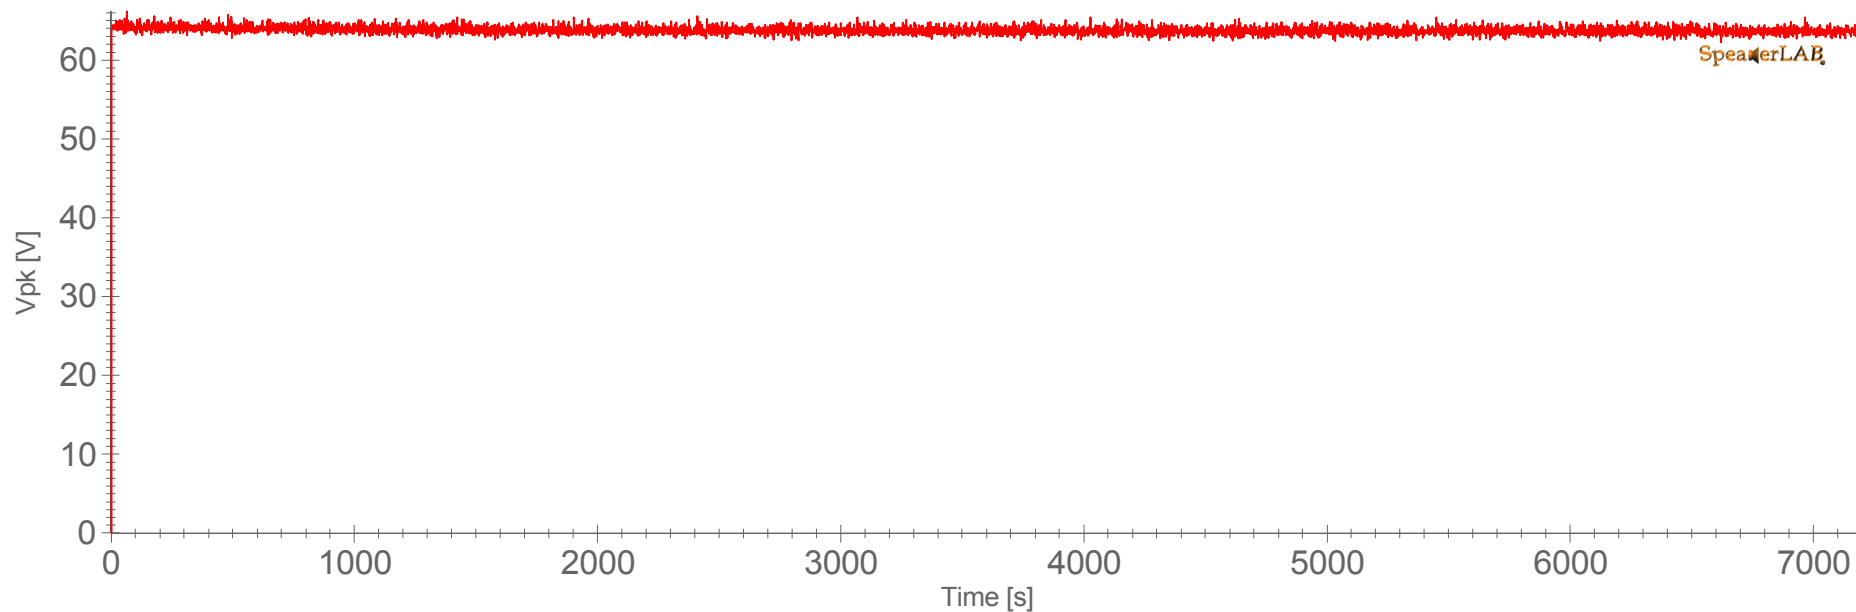


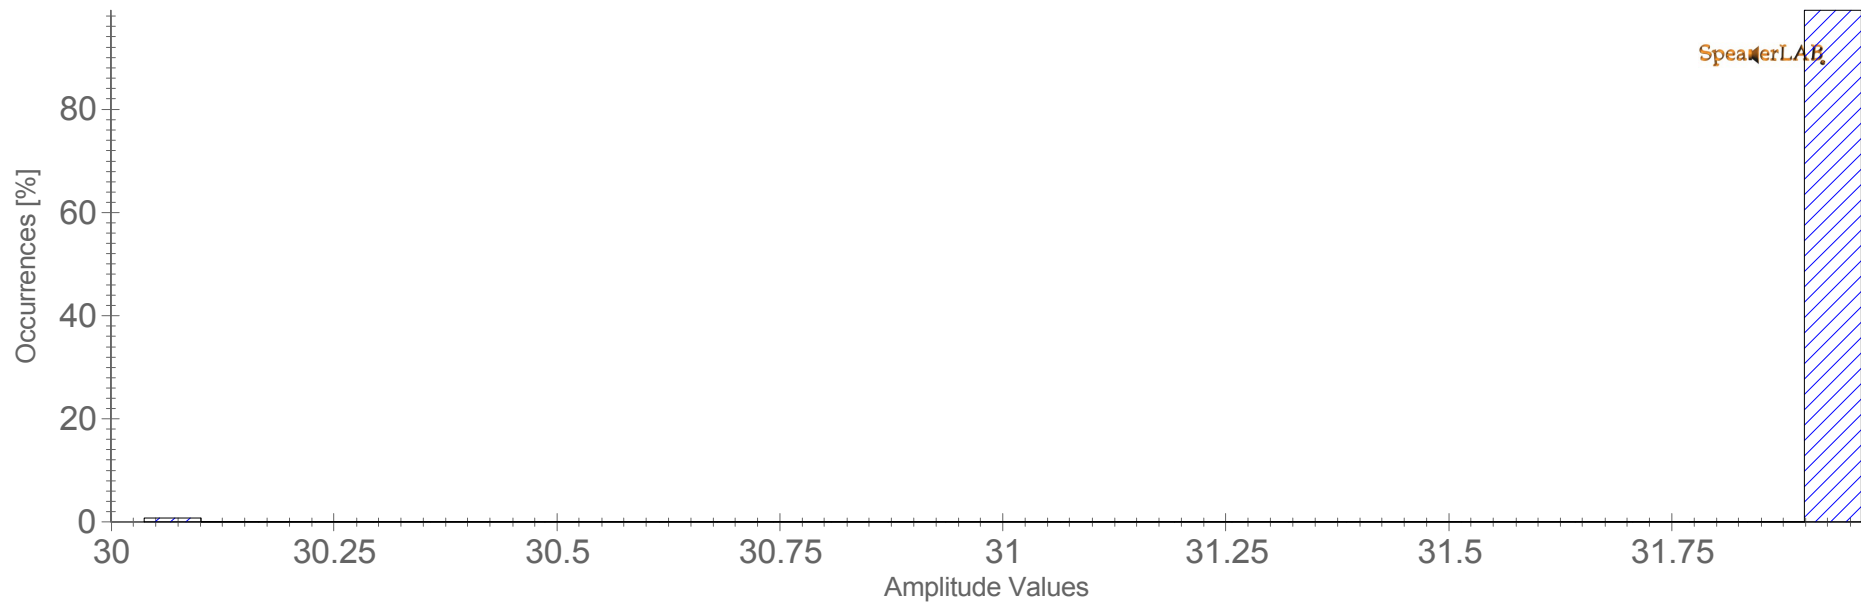
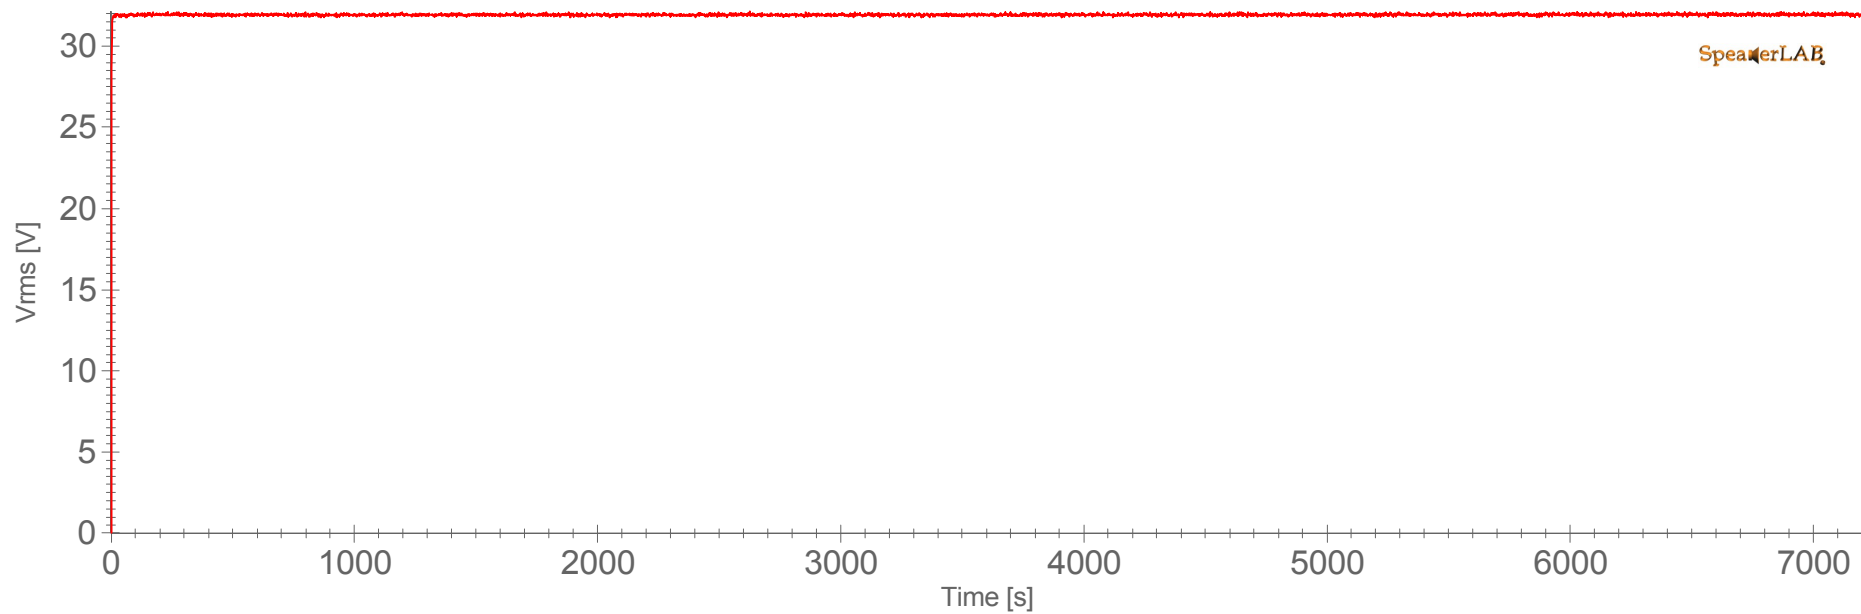


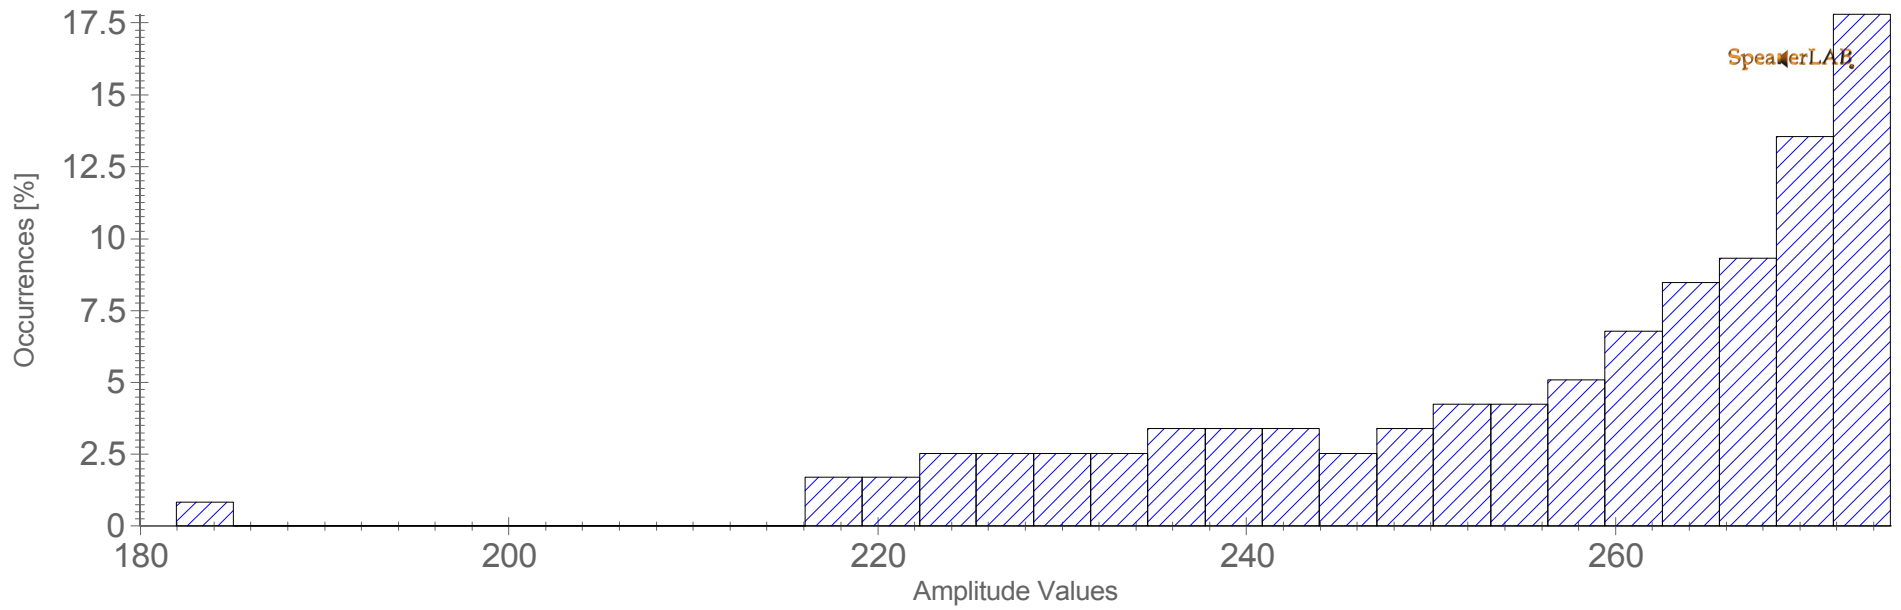
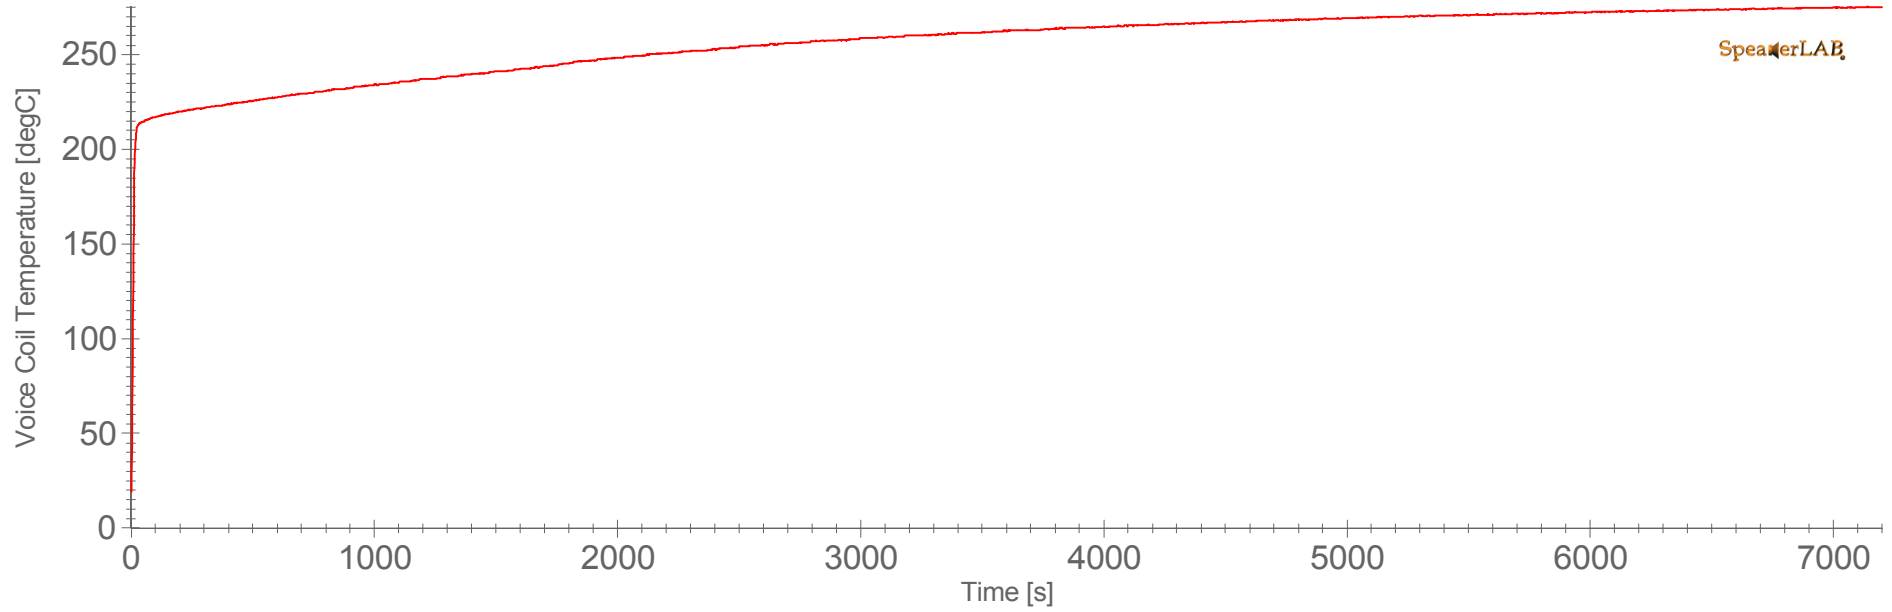


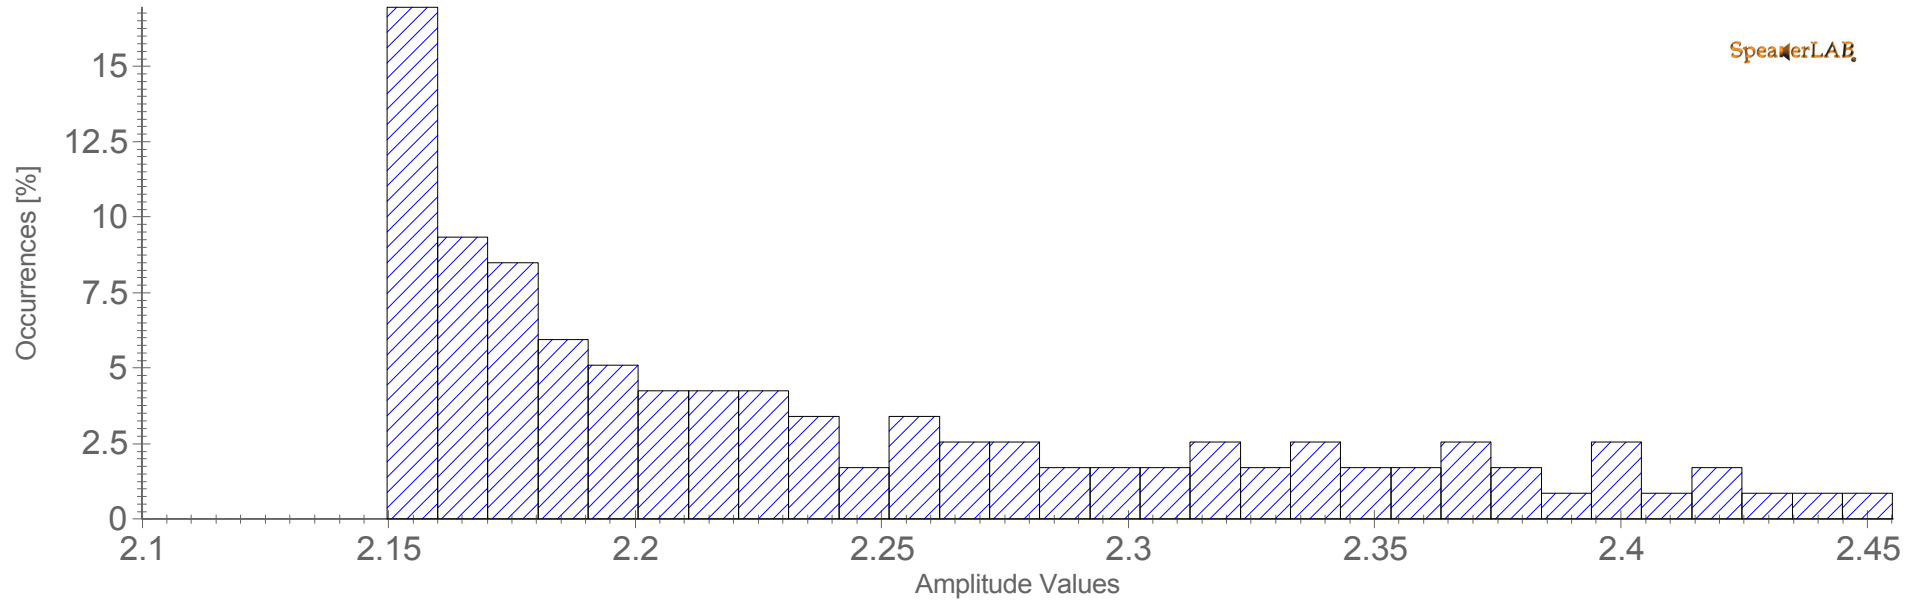
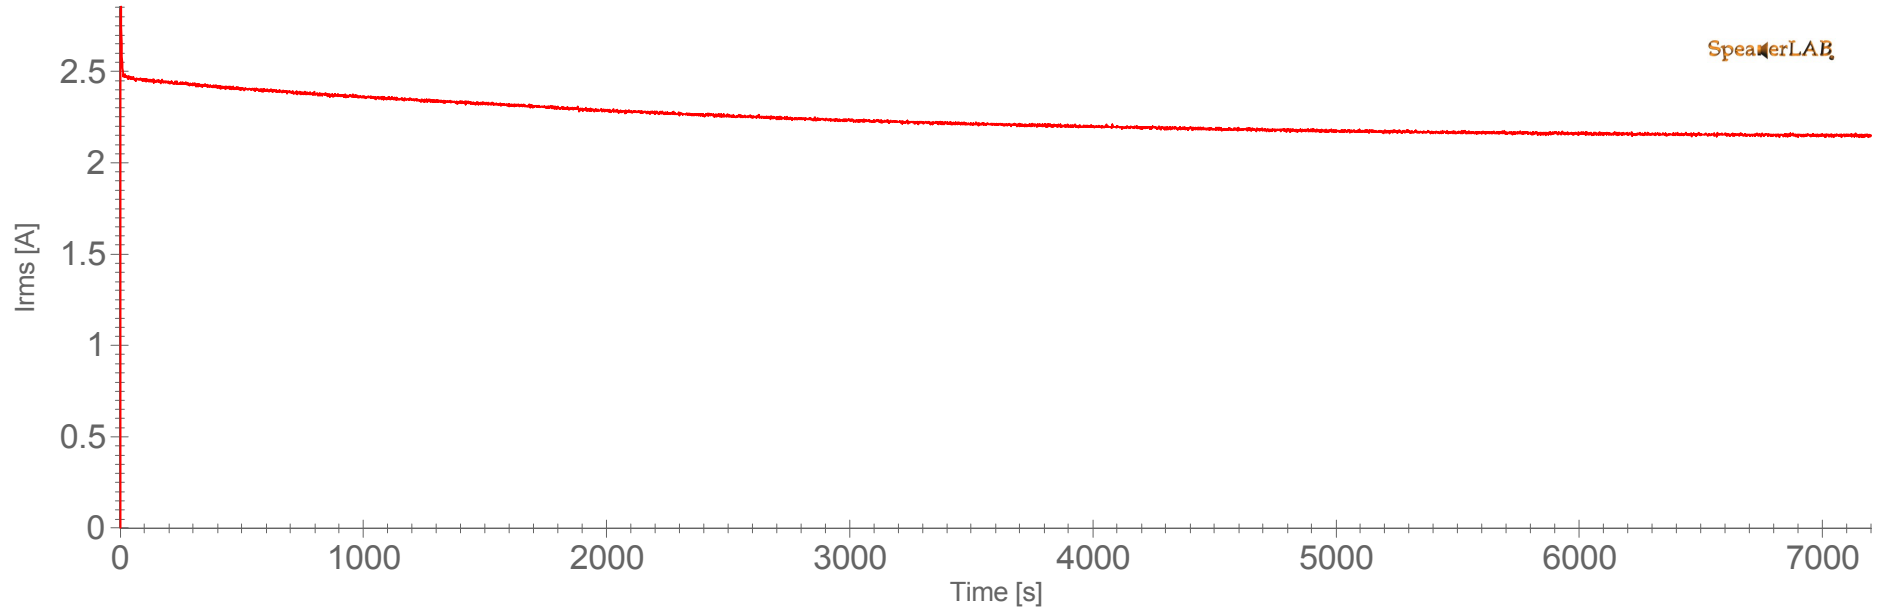


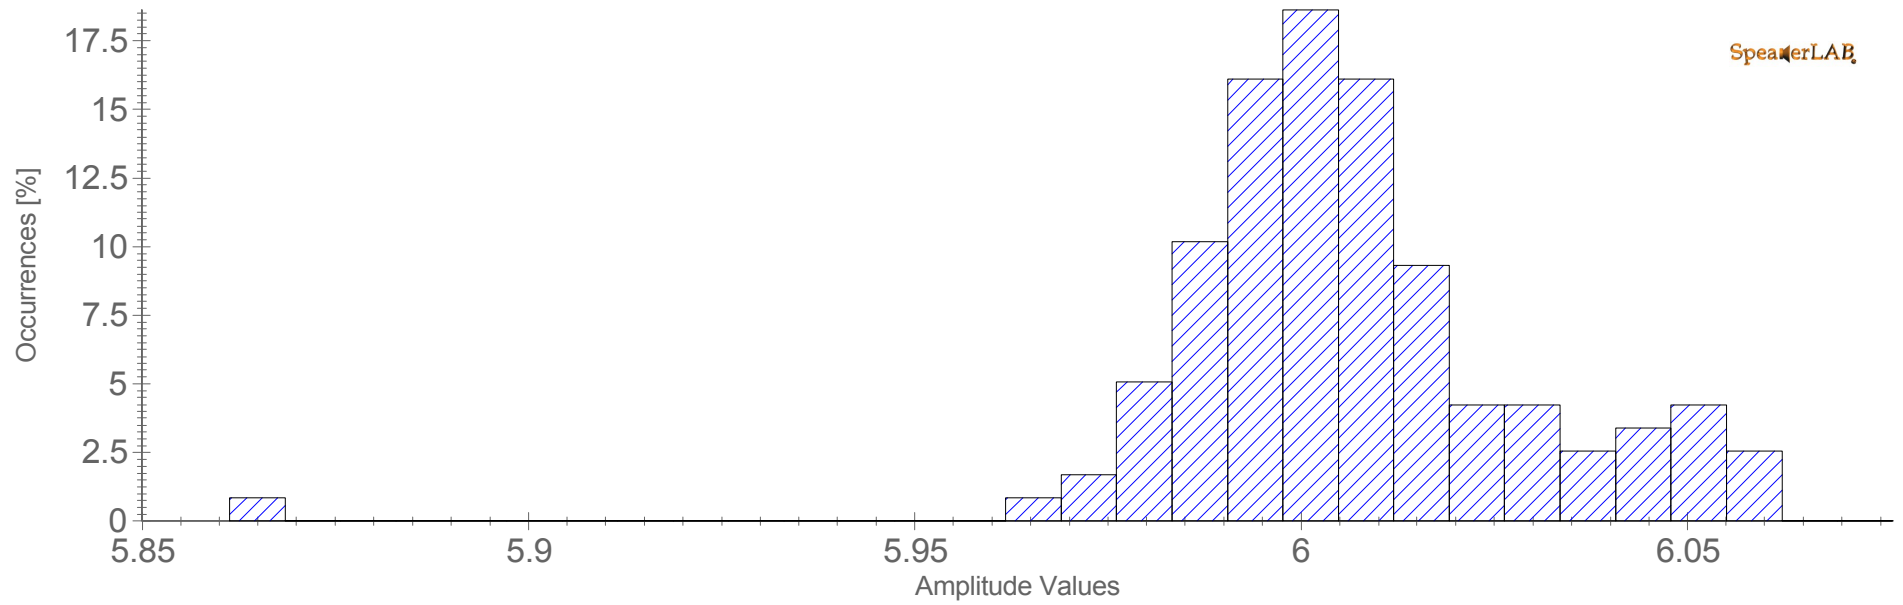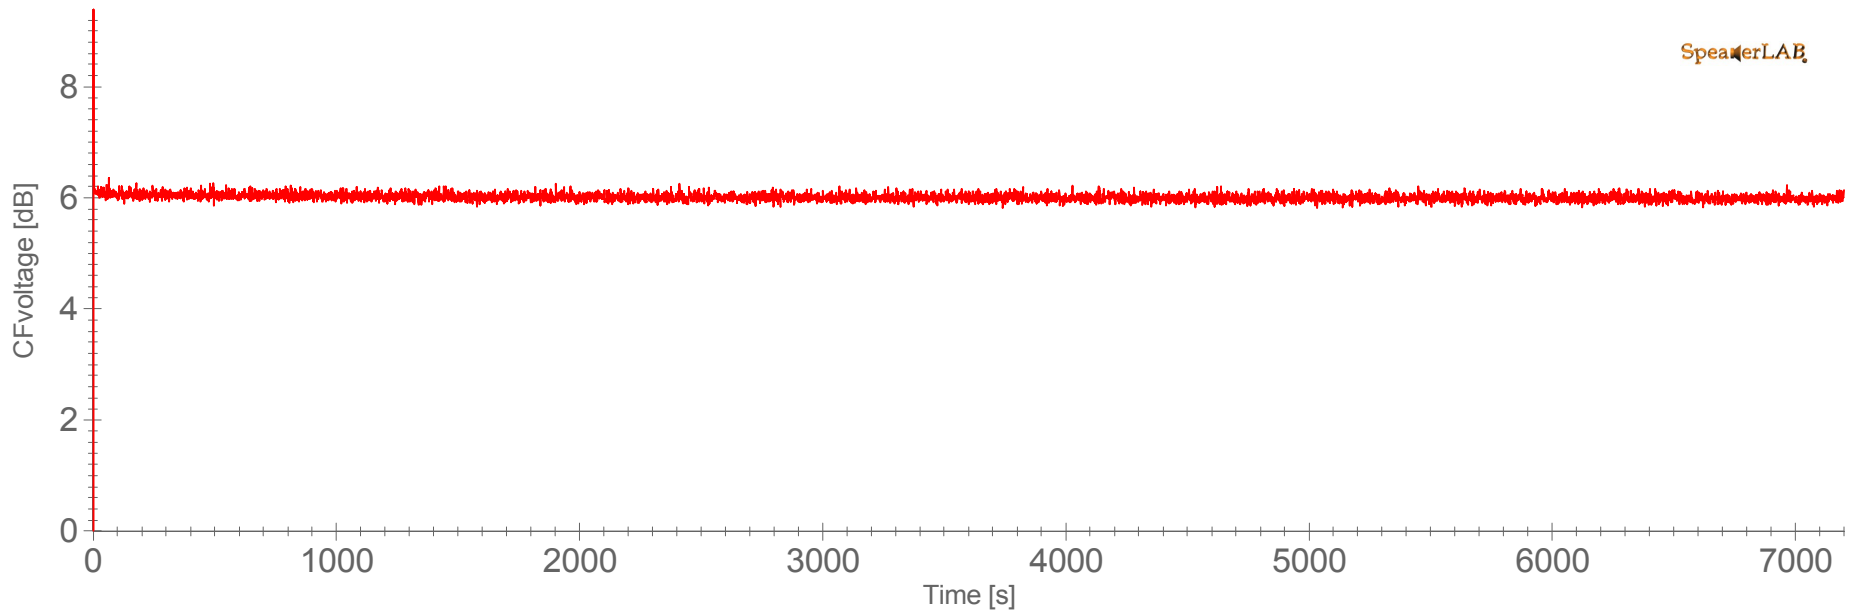

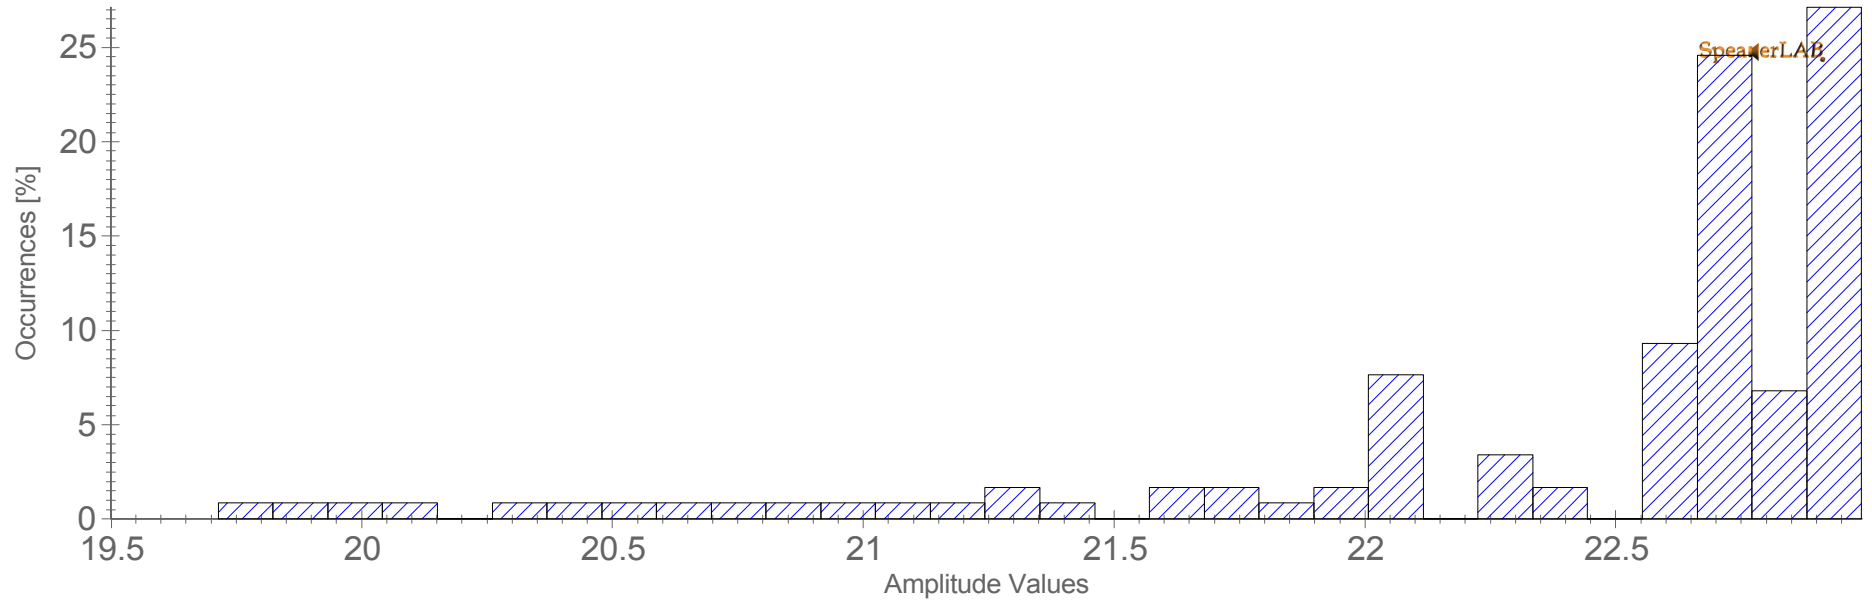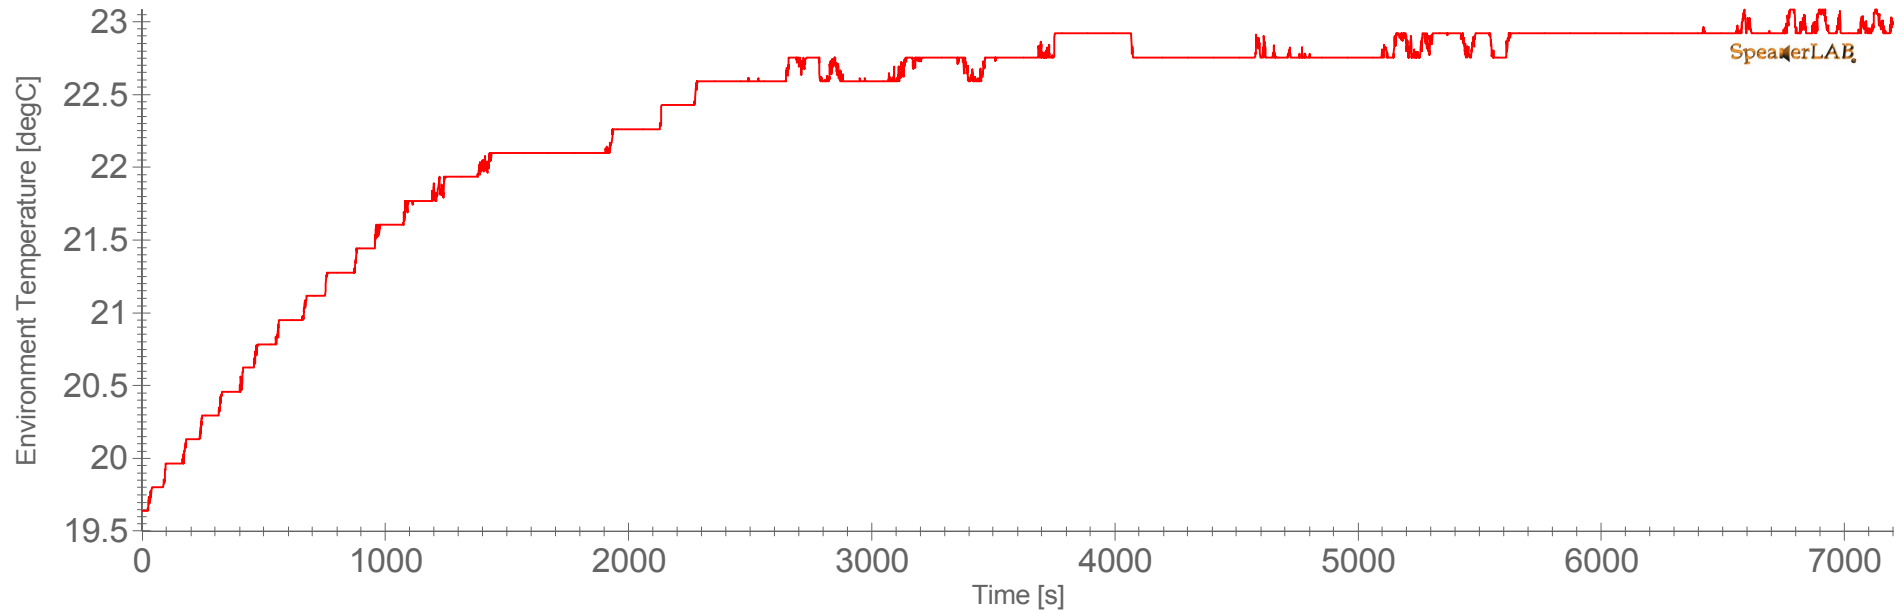

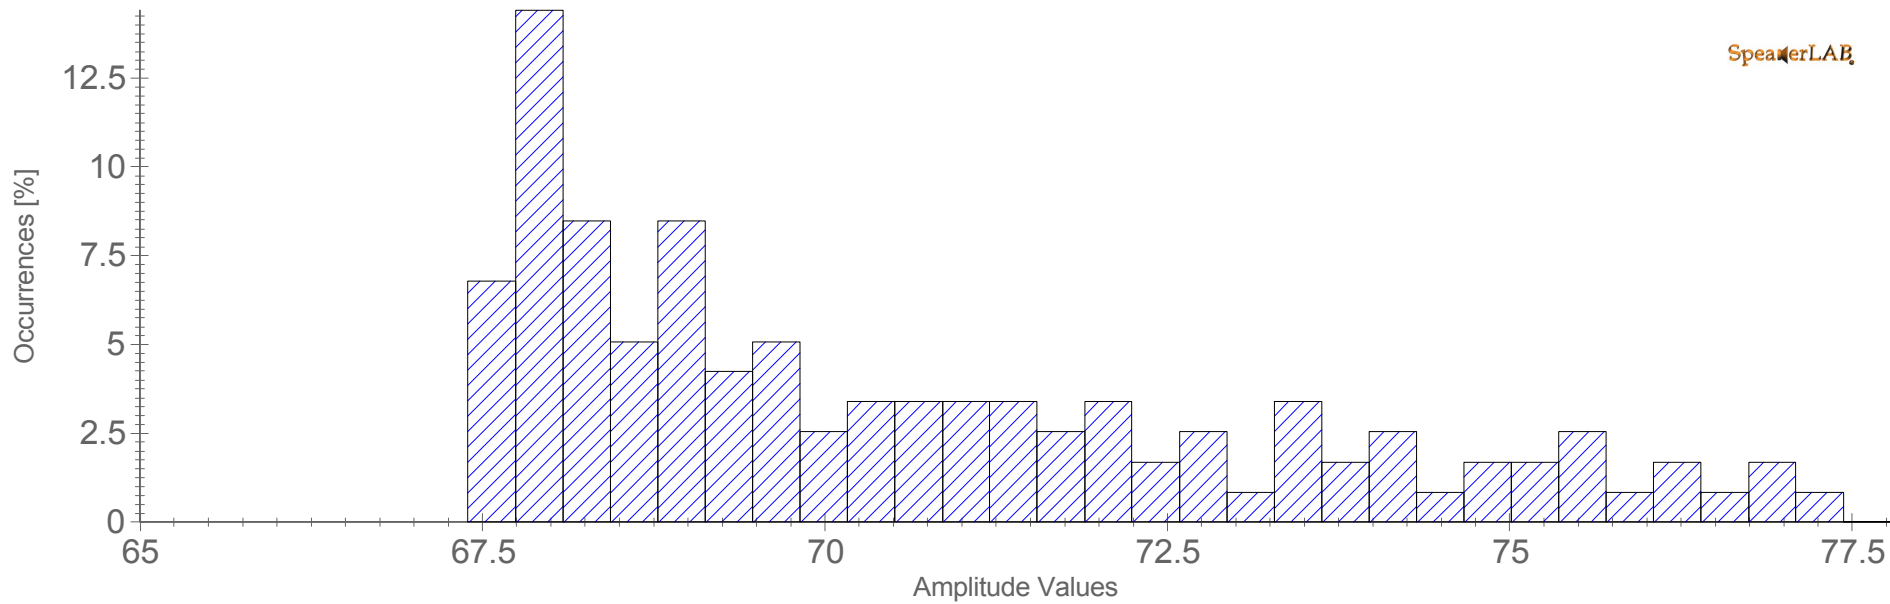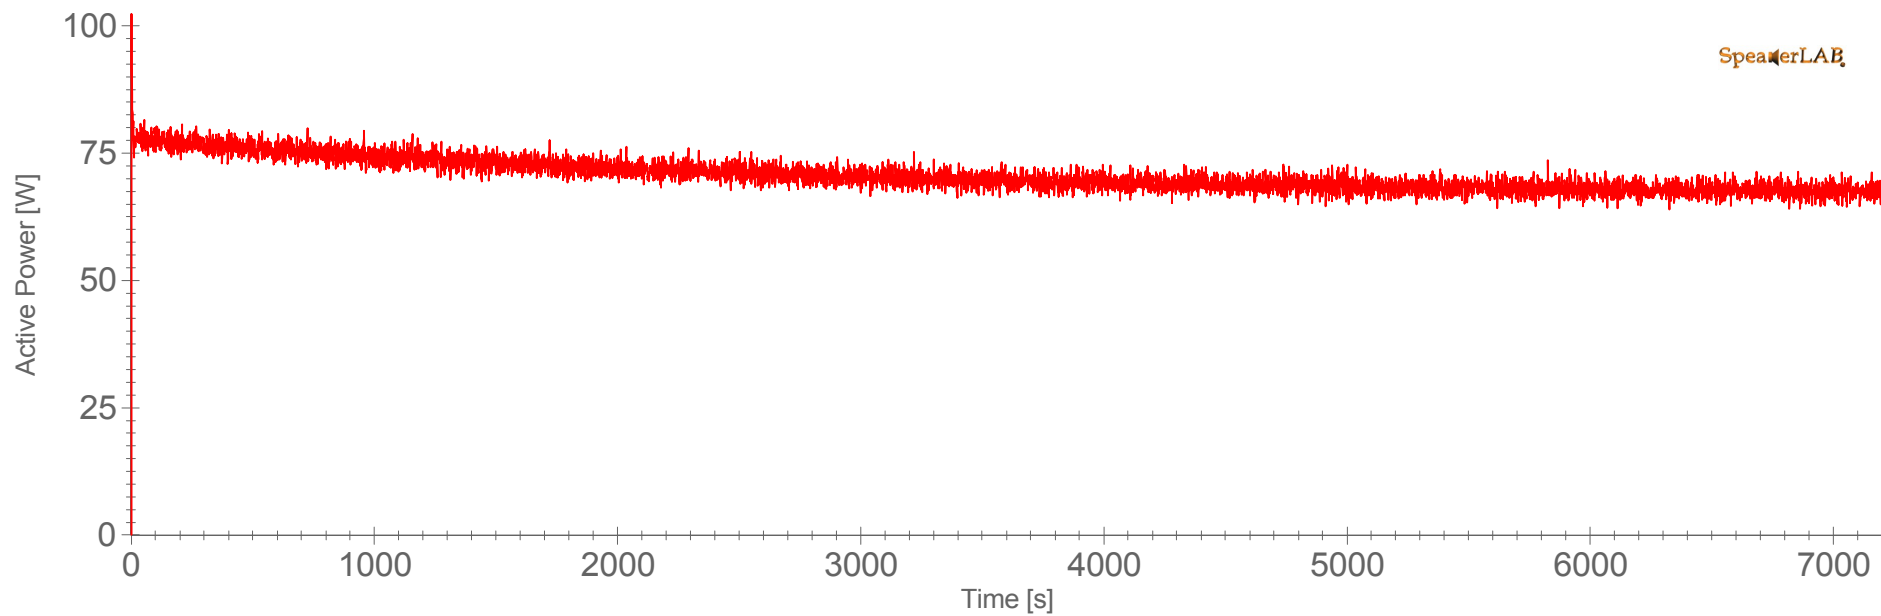

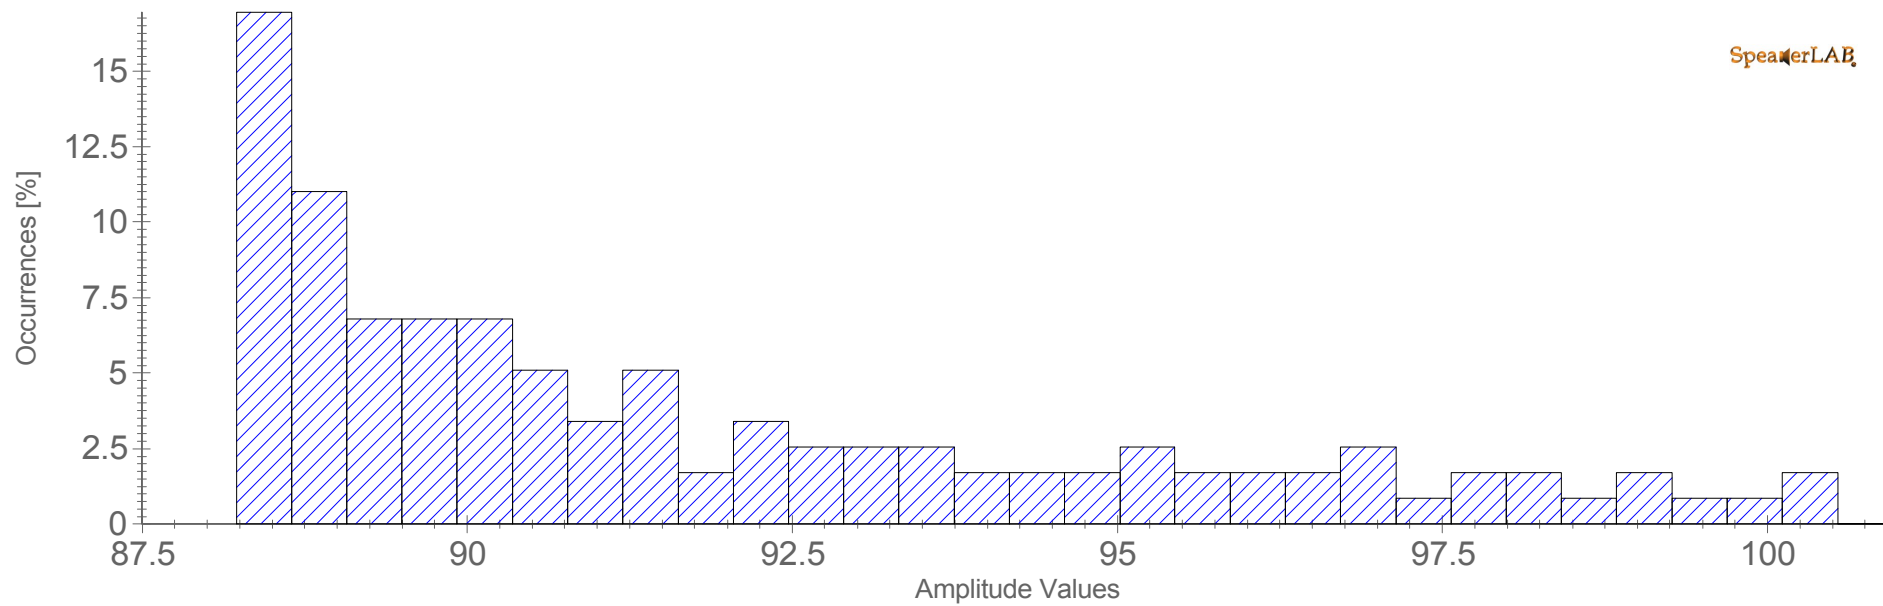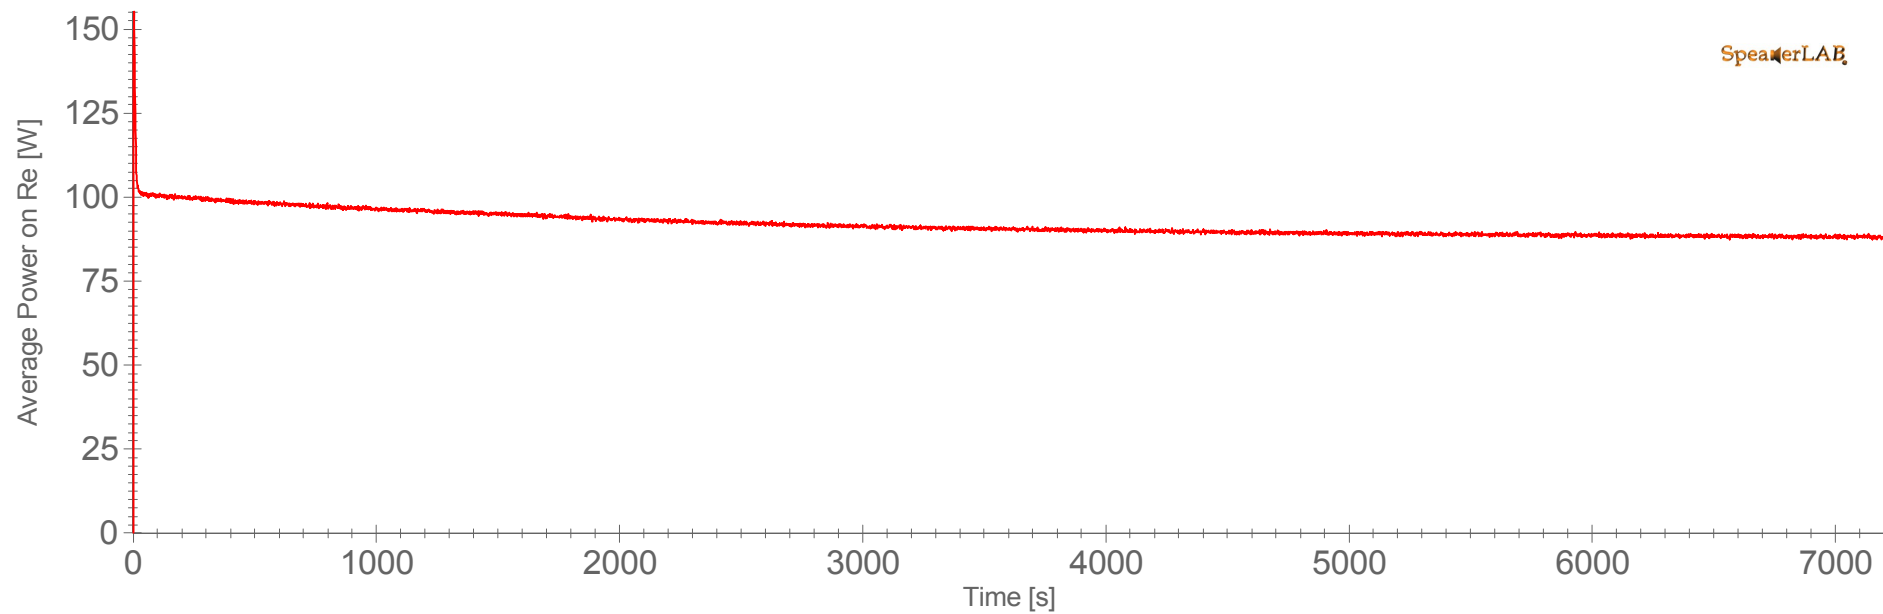

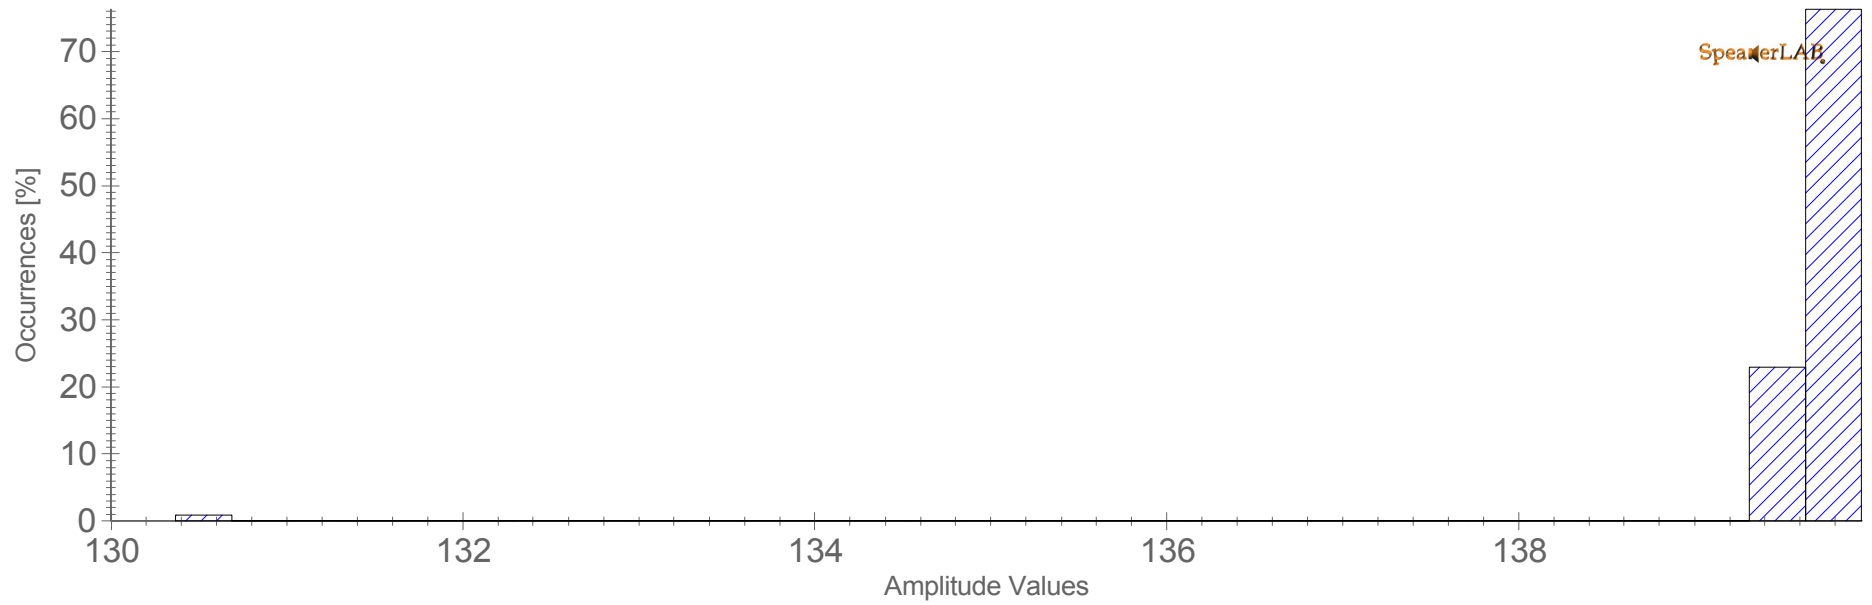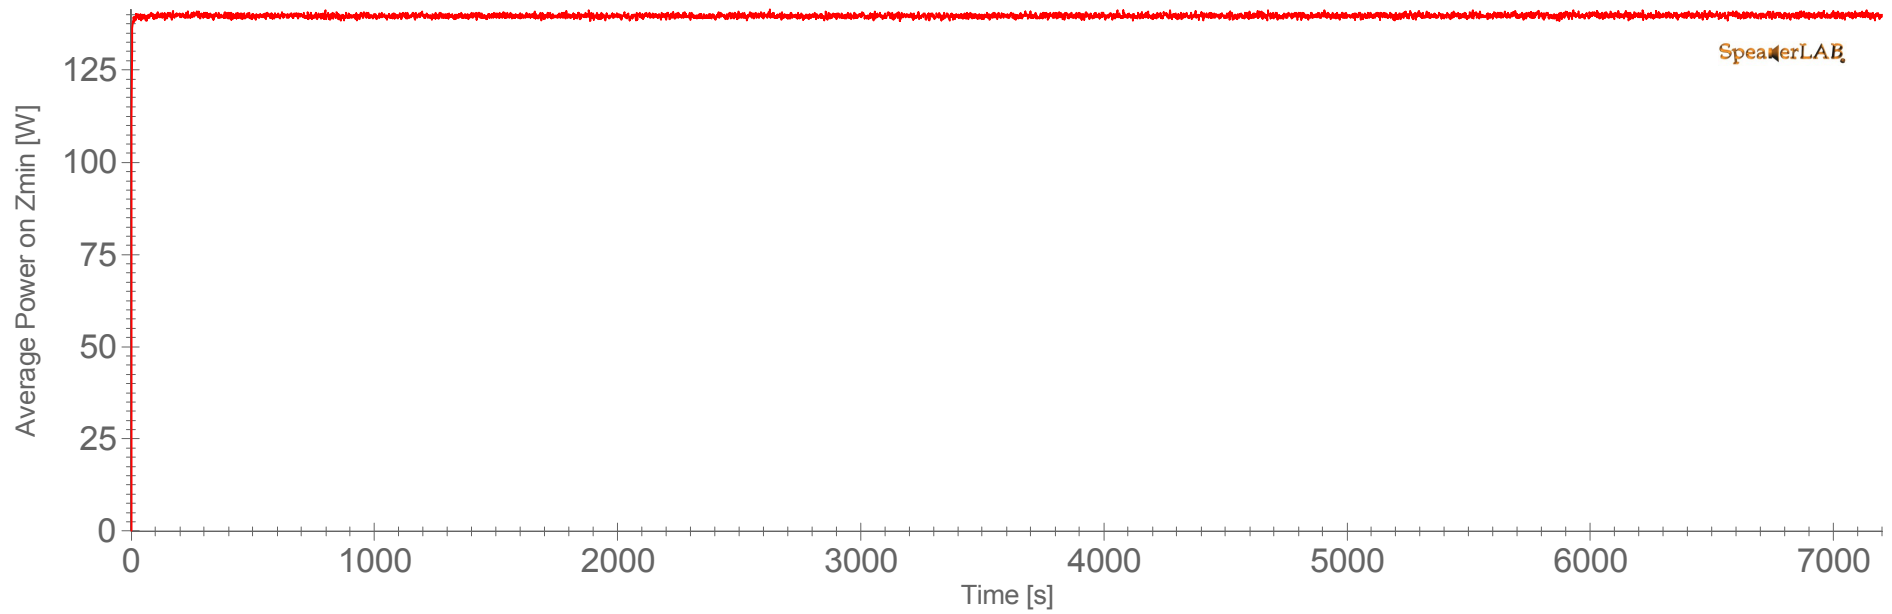

The End

CD 1003T



We design this document to reduce ink waste

Please consider the environment before printing this document (and don't print this page)